




**Metric
Version**

CONVEYOR COMPONENTS AND MODULAR SOLUTIONS.

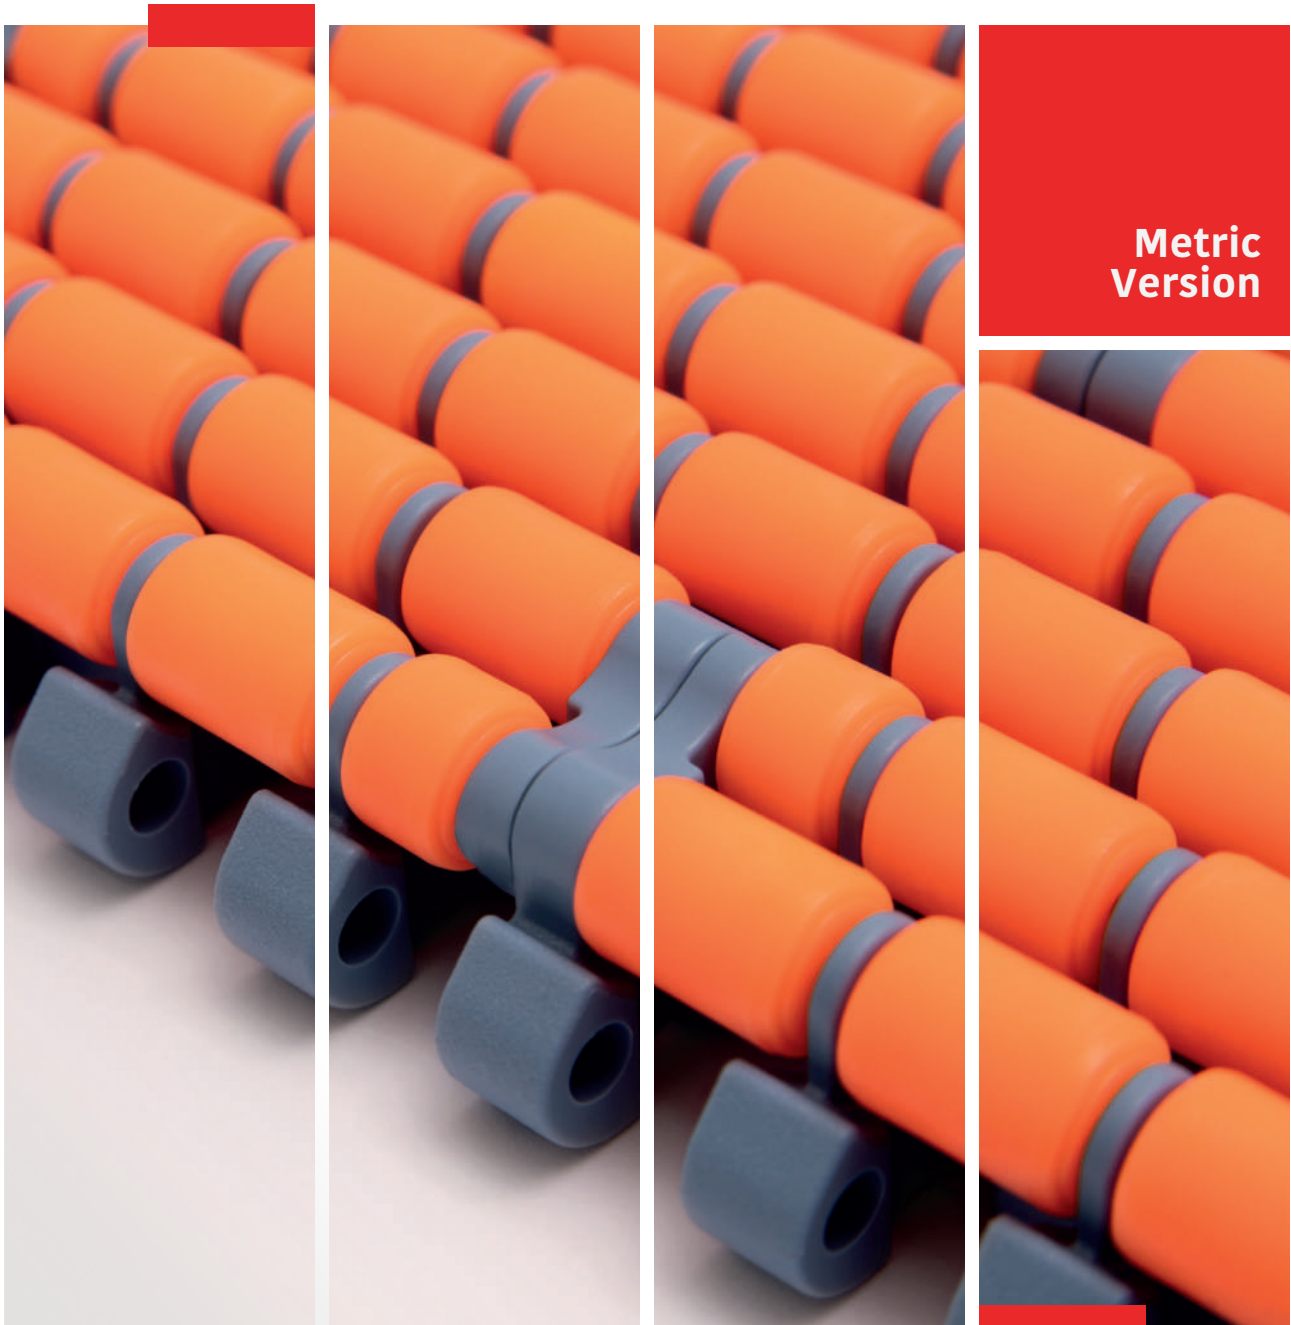

Movex[®]
PRODUCT CATALOG





Our **HISTORY**, the basis for our **FUTURE**.

Movex® is a dynamic and flexible business reality that have been active in the industrial production for over ten years and is reaching market leadership as a reliable and precise supplier, planning the future without losing sight of its history and its values.

In the headquarters Movex® designs and manufactures high quality components for the beverage, packaging, food, logistics, automotive and automation industries.

Movex® meets your needs for standard and custom made products in a dynamic and responsive way, ensuring the best performance to satisfy our customers requirements.

A top service level is the goal of a qualified Engineering and Sales team with the objective of presenting Movex® as a supplier of excellence to all clients.

Through a distribution/network which spans the globe, Movex® offers technical support and a careful after-sales service, always at your disposal.

ABOUT US

>200

EMPLOYEES AROUND
THE WORLD

>30%

ANNUAL GROWTH RATE

Reference year 2021

>6.000

SATISFIED CUSTOMERS





Logistics center
Via della Repubblica 21/E
Castelli calepio (BG) - ITALY



MISSION

Creating value through development of ideas, supporting our partners with professionalism flexibility and effectiveness.



VISION

Reaching market leadership as a reliable and precise supplier. Planning the future without losing sight of our history and the values that allow our growth.



Headquarters
Viale Industria, 22
Castelli calepio (BG) - ITALY

Movex

ABOUT PRODUCTS

>35.000
PRODUCTS AVAILABLE

>12.000
NEW ARTICLE NUMBERS

Compared to the previous
catalog version

<24 h
TIME FOR PROCESSING
YOUR REQUESTS

Movex World

Three simple
ways to keep
in touch.



Website

Consult our catalogs and stay
updated on our latest news.

www.movexii.com

Social media

News, curiosity and info about
us and our products.

Follow us   

Movex App

The easiest way to keep up to
date on our events, projects.

Download it free!



SYNERGIA
CORPORATE SERVICE

Tailor-made support
for your business.



TECHNICAL
SUPPORT



CONSULTING
SERVICE



FAST
ASSISTANCE



DATA
COLLECTION

+39 035 8359711
synergia@movexii.com

Line survey, analysis and monitoring

THE ADVANTAGE OF BEING ALWAYS ON THE BALL.

Frequently, replacement of conveyor components are only executed when line performances starts decreasing, causing severe downtimes and loss of efficiency.

While you stay focused on your priorities, we will collect data and make an ideal plan to keep your line 100% efficient.

Full lifecycle product support

ENJOY PEACE OF MIND WITH A PREVENTIVE ACTION.

With SYNERGIA service you can easily identify the line conditions and determine an optimized replacement schedule.

- PLAN INTERVENTION ACTIONS • CORRECT REPLACEMENT PARTS
- ELIMINATE UNEXPECTED DOWNTIMES • SAVE ON TOTAL COST

Why choose us?

TELL US HOW WE CAN HELP.

By using SYNERGIA, your company will have the chance to work with a professional team of experts, specialized in conveyor components, able to help you from remote desktop or directly on site.

- ENGINEER • MECHANIC • TECHNICIAN • WELDER

CONTACT US AND CHOOSE YOUR SYNERGIA PLAN
THAT BEST SUITS YOUR NEEDS.



Priority service

**Even faster and responsive,
when you need it.**

Products in stock are available to ship
within 24 Hours of the receipt of order.

>10.000 ARTICLES NUMBER
READY TO DELIVERY

Request a free quotation!




Priority service is optional,
available on request

Table of contents

Sommario / Inhaltsverzeichnis

	Steel chains	Pag 7
	Plastic chains	Pag 27
	Chain sprockets and Turning disks	Pag 77 / 102
	Chain idler wheels	Pag 107
	Magnetic, Tab & Bevel corner tracks	Pag 113
	Modular belts and NoseBars	Pag 179 / 270
	Modular solutions	Pag 285
	Belt sprockets	Pag 311
	Extruded profiles	Pag 341
	Return components	Pag 435
	Conveyor components	Pag 447
	Conveyor support components	Pag 513
	Bearing supports	Pag 529
	Leveling feet	Pag 557
	Materials	Pag 645




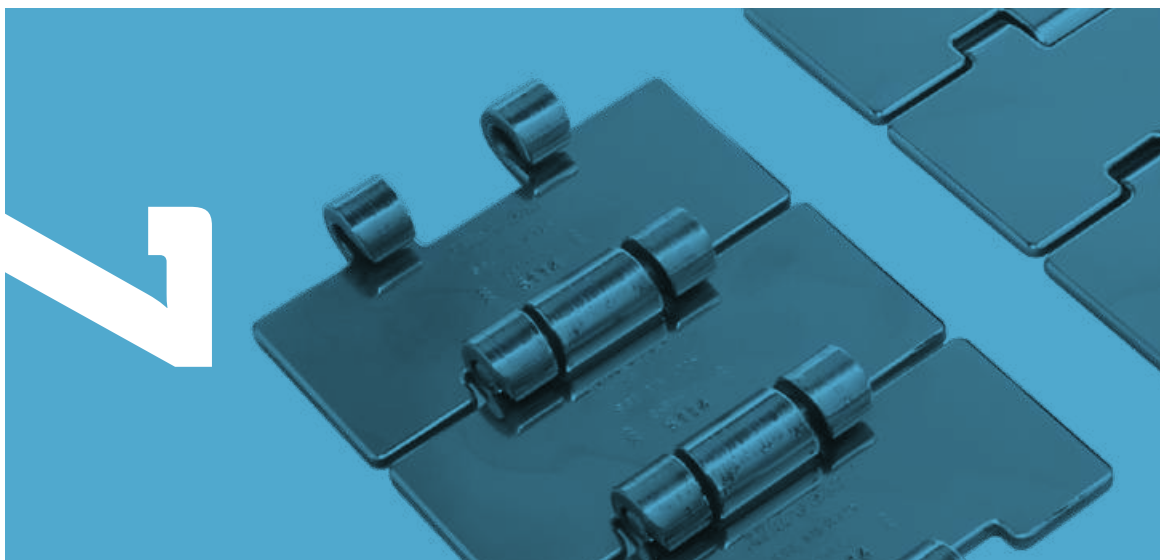


Steel chains

812/815  Pag 8/9	812 GT/815 GT  Pag 10	815 TAB GT  Pag 11	815 MINI  Pag 12	815 MINI GT  Pag 12	802/805  Pag 13
802 GT/805 GT  Pag 14	8157  Pag 15	8157 GT  Pag 15	512  Pag 16	881 M  Pag 17/18	881 M GT  Pag 19
881 TAB  Pag 20	881 B  Pag 21	8811 TAB  Pag 22	8811 R TAB  Pag 23	8811 TAB GT  Pag 23	8811 B  Pag 24
8857 M  Pag 25	8857 M GT  Pag 25	1874 TAB  Pag 26			

Material
Info:



pg. 662>665

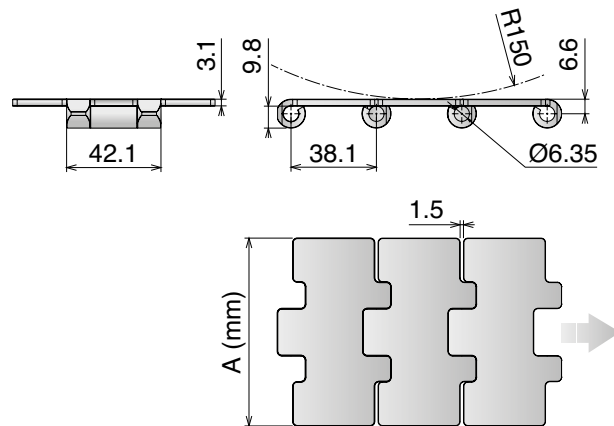


Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Surface finish µm	Surface Flatness mm	Polished Hinge eyes	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	----------------	----------------------	------------------------	------------------------	-------------------------	-----------------------

SSM Max Speed - Hardened pins

10010302	SSM 815 K325	82,5	2,55	0,2	0,08	YES	6000	3,1
10010303	SSM 815 K330	83,8	2,59	0,2	0,08	YES		

Max Speed High Performance



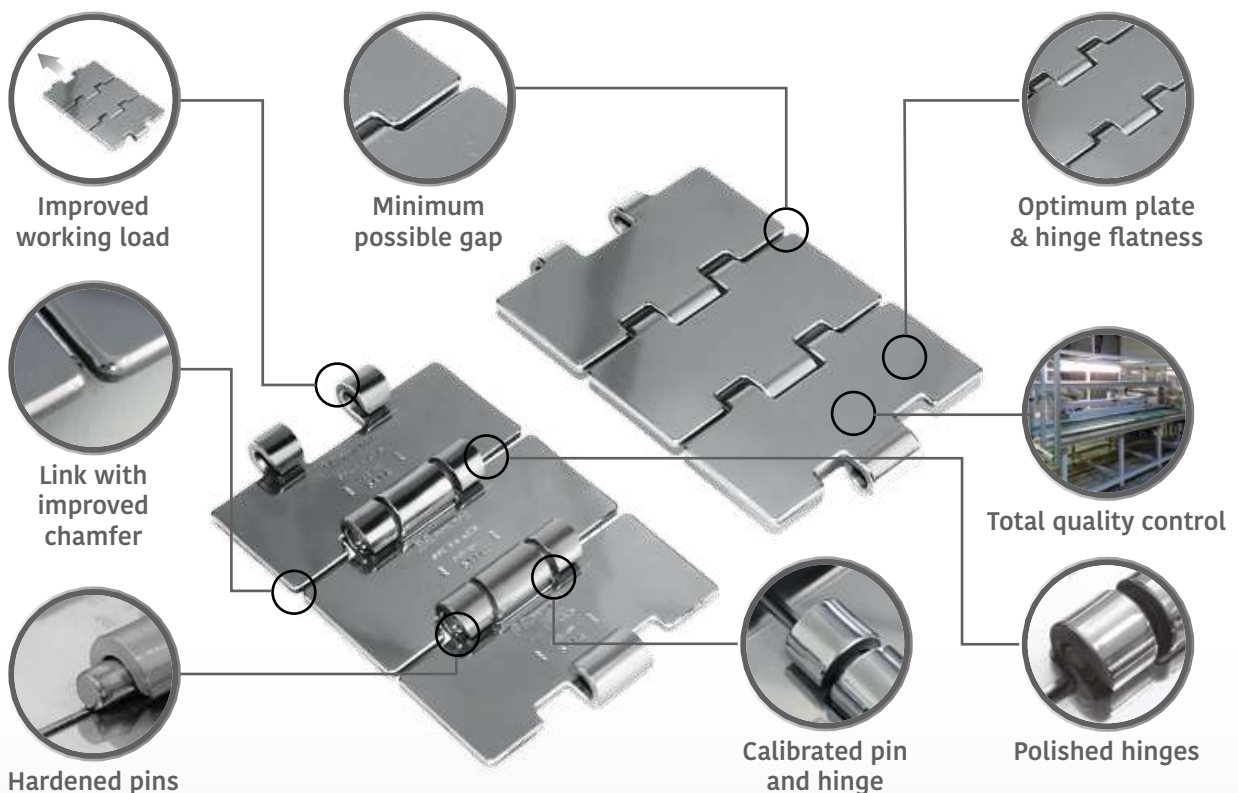


812/815

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 150 mm

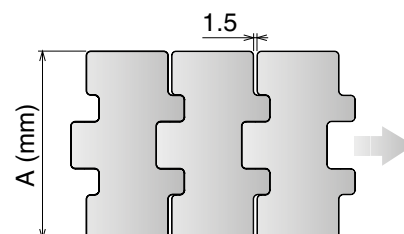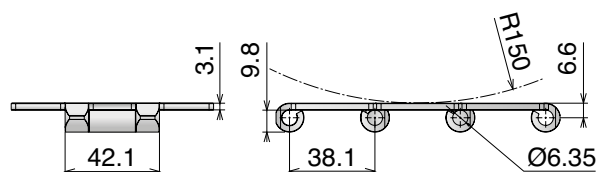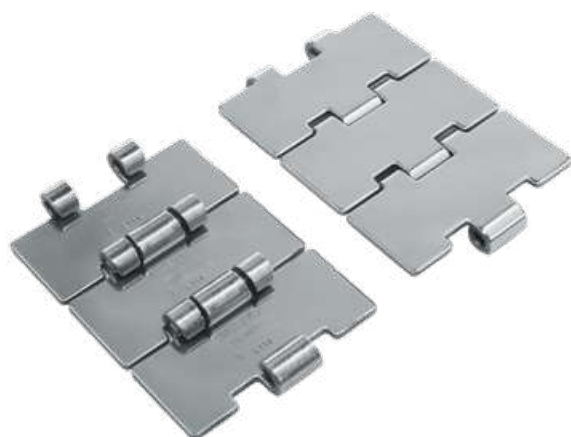

80 links



78-79-93/108



pg. 662>665

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Surface finish µm	Surface Flatness mm	Polished Hinge eyes	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	----------------	----------------------	------------------------	------------------------	-------------------------	-----------------------

SS Ferritic Stainless Steel (1.4016)

10010216	SS 812 K300	76,2	2,50	0,5	0,15	NO	5400	3,1
10010202	SS 812 K325	82,5	2,55	0,5	0,15	NO		
10010203	SS 812 K330	83,8	2,59	0,5	0,15	NO		
10010204	SS 812 K350	88,9	2,69	0,5	0,15	NO		
10010214	SS 812 K400	101,6	3,00	0,5	0,15	NO		
10010205	SS 812 K450	114,3	3,25	0,5	0,20	NO		
10010206	SS 812 K600	152,4	4,15	0,5	0,30	NO		
10010207	SS 812 K750	190,5	5,05	0,5	0,30	NO		

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

10010102	SSE 815 K325	82,5	2,55	0,3	0,10	YES	6000	3,1
10010103	SSE 815 K330	83,8	2,59	0,3	0,10	YES		
10010104	SSE 815 K350	88,9	2,69	0,3	0,15	NO		
10010114	SSE 815 K400	101,6	3,00	0,3	0,15	NO		
10010105	SSE 815 K450	114,3	3,25	0,3	0,20	NO		
10010106	SSE 815 K600	152,4	4,15	0,3	0,30	NO		
10010107	SSE 815 K750	190,5	5,05	0,3	0,30	NO		

SSA Austenitic Stainless Steel (AISI 304) - Austenitic pin

10010402	SSA 815 K325	82,5	2,55	0,5	0,15	NO	5300	3,1
10010403	SSA 815 K330	83,8	2,59	0,5	0,15	NO		
10010404	SSA 815 K350	88,9	2,69	0,5	0,15	NO		
10010405	SSA 815 K450	114,3	3,25	0,5	0,20	NO		
10010406	SSA 815 K600	152,4	4,15	0,5	0,30	NO		
10010407	SSA 815 K750	190,5	5,05	0,5	0,30	NO		

812 GT/815 GT


Catene in acciaio / Steel chains / Scharnierbandketten aus Edelstahl

812 GT/815 GT

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 120 mm

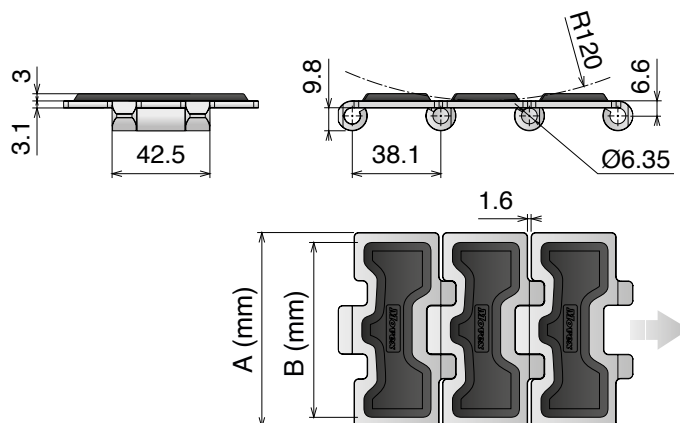

80 links



78-79-93/108



pg. 662>665

Article-Nr.	Ref.	A (Plate Width) mm	B (Rubber Width) mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
-------------	------	-----------------------	------------------------	----------------	-------------------------	------------------------------

SS Ferritic Stainless Steel (1.4016)

10020202	SS 812 GT K325	82,5	75	2,80	5400	Plate 3,1 Rubber 3
-----------------	-----------------------	------	----	------	------	--------------------

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

10020102	SSE 815 GT K325	82,5	75	2,80	6000	Plate 3,1 Rubber 3
10020105	SSE 815 GT K450	114,3	107	3,55		
10020107	SSE 815 GT K750	190,5	140	5,55		


815 TAB GT

Catena rettilinea

Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 120 mm

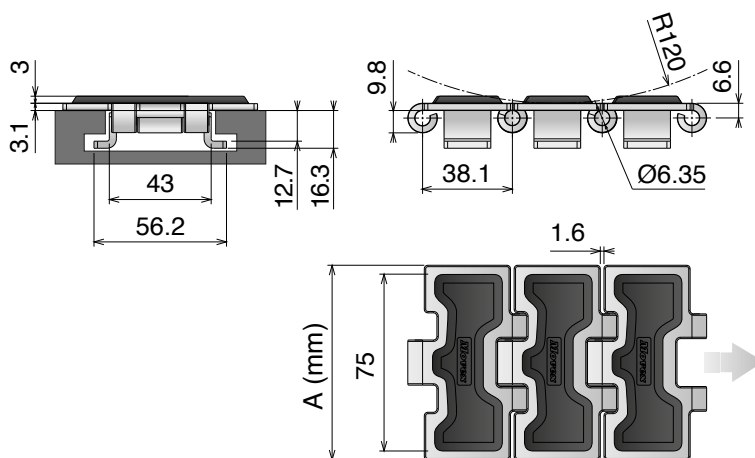**TAB SYSTEM**

80 links



78-79-93/108



pg. 662>665

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
-------------	------	-----------------------	----------------	-------------------------	------------------------------

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

10200102	SSE 815 TAB GT K325	82,5	3,40	6000	Plate 3,1 Rubber 3
----------	---------------------	------	------	------	--------------------

815 MINI-815 MINI GT


Catene in acciaio / Steel chains / Scharnierbandketten aus Edelstahl

815 MINI

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 75 mm

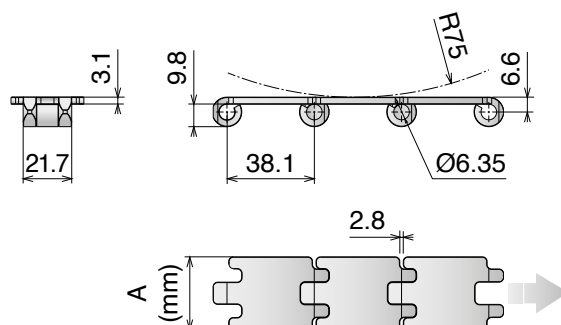

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	----------------	-------------------------	-----------------------

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins


10210117	SSE 815 K125	31,75	1,07	3000	3,1
10210118	SSE 815 K175	44,45	1,35		

815 MINI GT

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 75 mm

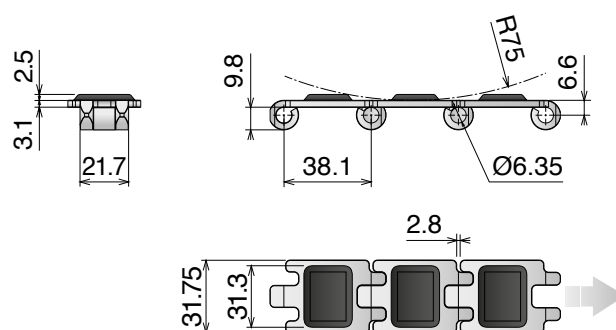

Article-Nr.	Ref.	A (Plate Width) mm	B (Rubber Width) mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
-------------	------	-----------------------	------------------------	----------------	-------------------------	------------------------------

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

10230117	SSE 815 GT K125	31,75	31,3	1,20	4000	Plate 3,1 Rubber 2,5
----------	-----------------	-------	------	------	------	----------------------



Movex

802/805

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 150 mm

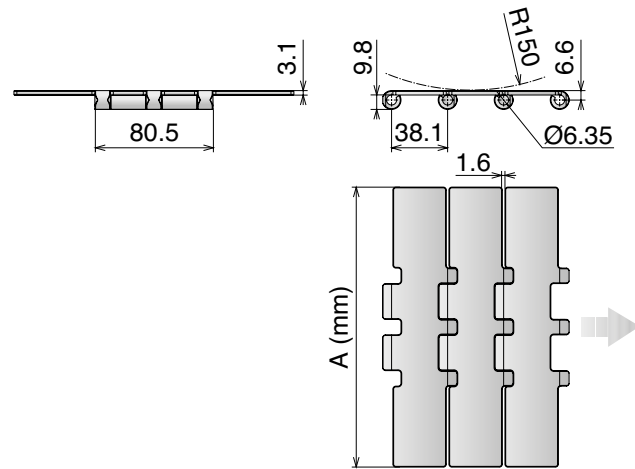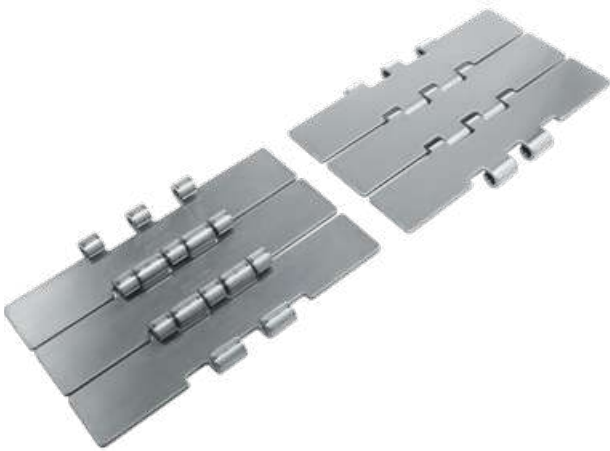

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
SS Ferritic Stainless Steel (1.4016)						
10030207	SS 802 K750	190,5	5,80	0,6	7000	3,1
SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins						
10030107	SSE 805 K750	190,5	5,80	0,3	9000	3,1
SSA Austenitic Stainless Steel (AISI 304) - Austenitic pin						
10030407	SSA 805 K750	190,5	5,80	0,6	8700	3,1

802 GT/805 GT

Catene in acciaio / Steel chains / Scharnierbandketten aus Edelstahl




802 GT/805 GT

Catena rettilinea

Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 130 mm

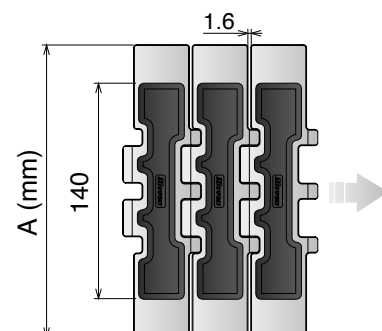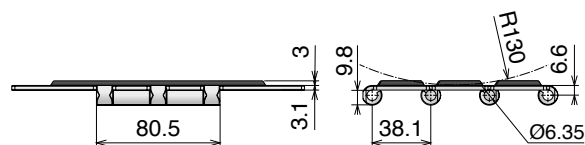

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
-------------	------	-----------------------	----------------	-------------------------	------------------------------

SS Ferritic Stainless Steel (1.4016)

10040207	SS 802 GT K750	190,5	6,20	7000	Plate 3,1 Rubber 3
-----------------	-----------------------	-------	------	------	--------------------

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins


10040107	SSE 805 GT K750	190,5	6,20	9000	Plate 3,1 Rubber 3
-----------------	------------------------	-------	------	------	--------------------

8157

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 130 mm

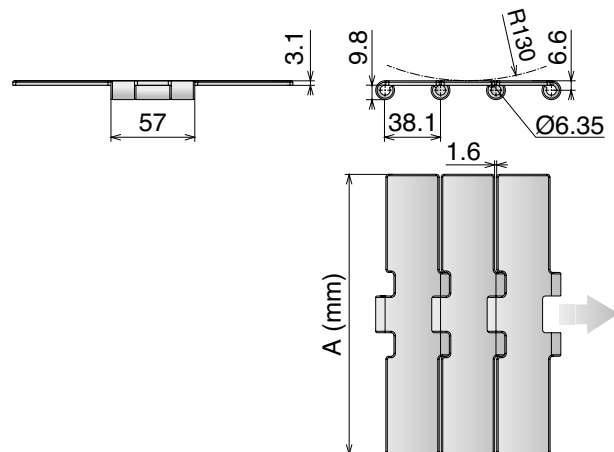

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	----------------	----------------------	-------------------------	-----------------------

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins


10050107	SSE 8157 K750	190,5	5,60	0,3	7000	3,1
----------	---------------	-------	------	-----	------	-----

8157 GT

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 130 mm

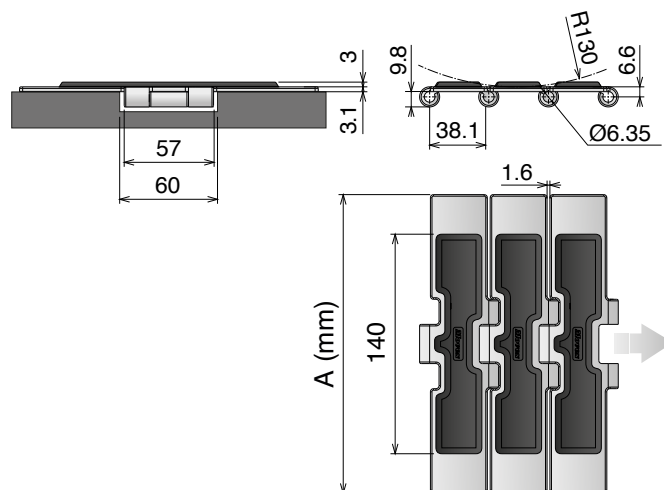





Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
-------------	------	-----------------------	----------------	-------------------------	------------------------------

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

10060107	SSE 8157 GT K750	190,5	6,00	10000	Plate 3,1 Rubber 3
----------	------------------	-------	------	-------	--------------------

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 80 mm

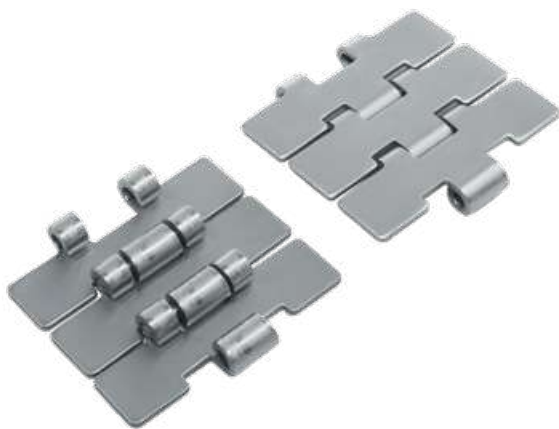

120 links



pg. 92-95



pg. 662>665

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	----------------	----------------------	-------------------------	-----------------------

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

10070100	SSE 512 K217	55,1	2,30	0,3	5000	3,1
10070101	SSE 512 K236	59,9	2,40	0,3		
10070108	SSE 512 K250	63,5	2,45	0,3		
10070109	SSE 512 K283	71,9	2,65	0,3		
10070102	SSE 512 K325	82,5	2,90	0,3		
10070104	SSE 512 K350	88,9	3,00	0,3		
10070114	SSE 512 K400	101,6	3,30	0,3		

SSA Austenitic Stainless Steel (AISI 304) - Austenitic pin


10070400	SSA 512 K217	55,1	2,30	0,3	4500	3,1
10070401	SSA 512 K236	59,9	2,40	0,3		
10070408	SSA 512 K250	63,5	2,45	0,3		
10070409	SSA 512 K283	71,9	2,65	0,3		
10070414	SSA 512 K400	101,6	3,30	0,3		

881 M

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 80 mm

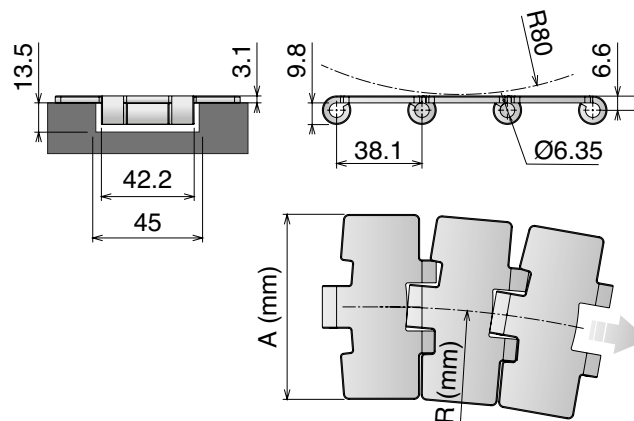

MAGNETIC SYSTEM



80 links



pg. 78->81-93/108-110




pg. 115->130



pg. 662->665

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Surface Flatness mm	Polished Hinge eyes	Max working load (N)	Plate Thickness mm
SSM Max Speed - Hardened pins									
10080302	SSM 881 M0 K325	82,5	500	2,55	0,2	0,08	YES	6000	3,1
10080303	SSM 881 M0 K330	83,8	500	2,59	0,2	0,08	YES		

Max Speed High Performance

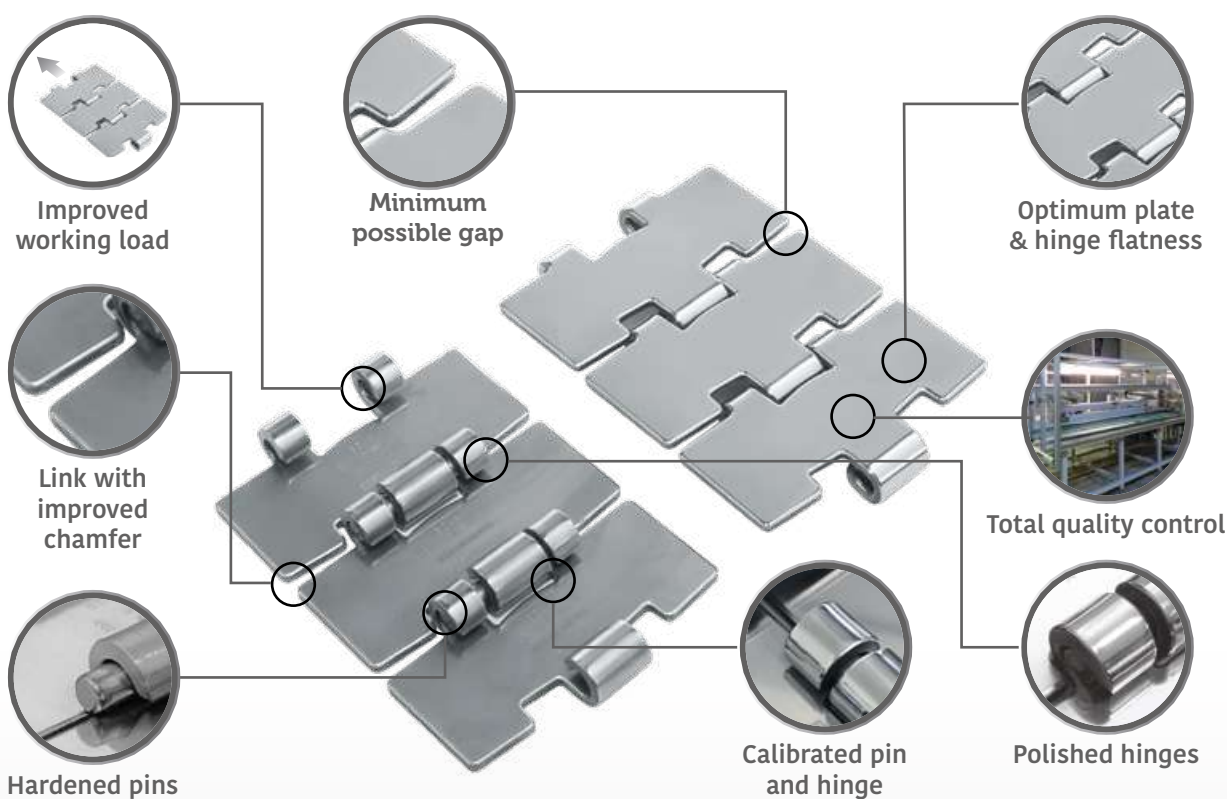


881 M

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 80 mm

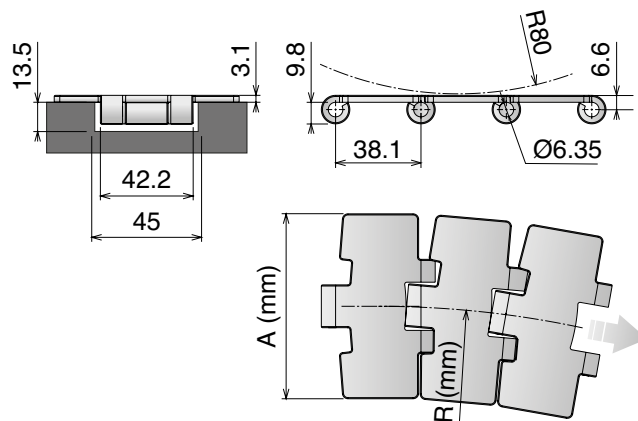

MAGNETIC SYSTEM



80 links



pg. 78->81-93/108-110



pg. 115->130



pg. 662->665

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Surface Flatness mm	Polished Hinge eyes	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	---------	----------------	----------------------	------------------------	------------------------	-------------------------	-----------------------

SS Ferritic Stainless Steel (1.4016)

10080202	SS 881 MO K325	82,5	500	2,55	0,5	0,15	YES	5400	3,1
10080203	SS 881 MO K330	83,8	500	2,59	0,5	0,15	YES		
10080205	SS 881 MO K450	114,3	500	3,10	0,5	0,20	YES		
10080207	SS 881 MO K750	190,5	500	4,85	0,5	0,30	YES		

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins


10080102	SSE 881 MO K325	82,5	500	2,55	0,3	0,10	YES	6000	3,1
10080103	SSE 881 MO K330	83,8	500	2,59	0,3	0,10	YES		
10080105	SSE 881 MO K450	114,3	500	3,10	0,3	0,20	YES		
10080107	SSE 881 MO K750	190,5	500	4,85	0,3	0,30	YES		

881 M GT

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 80 mm

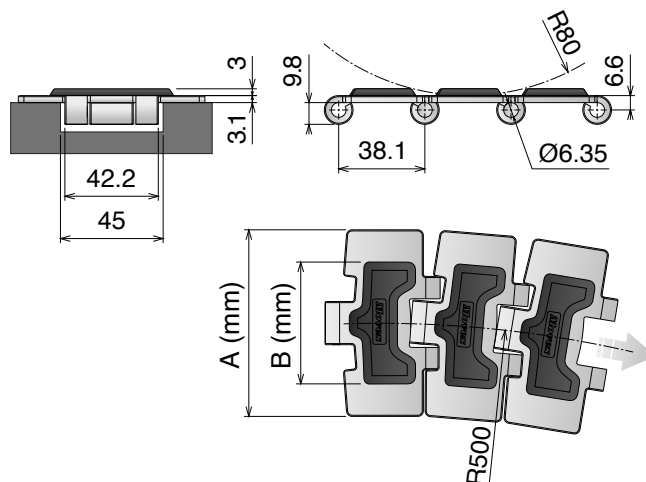

MAGNETIC SYSTEM

10 feet
3.048 m
80 links

pg. 78->81-93/108-110

pg. 115->130

pg. 662->665

Article-Nr.	Ref.	A (Plate Width) mm	B (Plate Width) mm	Weight kg/ m	Max working load (N)	Plate/Rubber Thickness mm
10090102	SSE 881 M GT K325	82,5	57	2,80	6000	Plate 3,1 Rubber 3
10090107	SSE 881 M GT K750	190,5	140	5,00		


SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

881 TAB


Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 80 mm

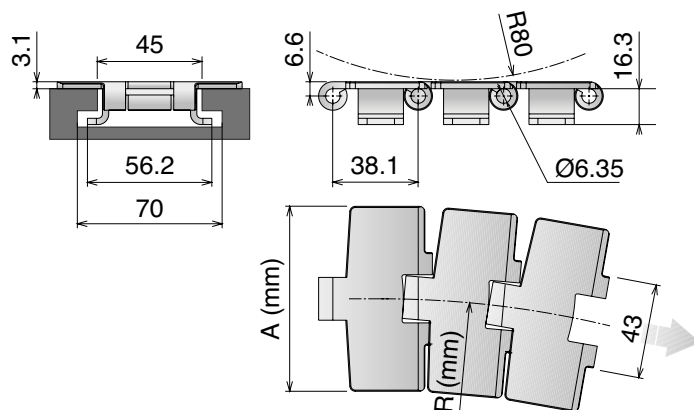

TAB SYSTEM



80 links



pg. 80-81/110



pg. 163/175



pg. 662>665

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	---------	----------------	----------------------	-------------------------	-----------------------

SS Ferritic Stainless Steel (1.4016)

10100202	SS 881 TAB K325	82,5	457	3,00	0,3	5400	3,1
----------	-----------------	------	-----	------	-----	------	-----

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

10100102	SSE 881 TAB K325	82,5	457	3,00	0,3	6000	3,1
10100105	SSE 881 TAB K450	114,3	500	3,69	0,3		
10100107	SSE 881 TAB K750	190,5	500	5,50	0,3		


SSA Austenitic Stainless Steel (AISI 304) - Austenitic pin

10100402	SSA 881 TAB K325	82,5	457	3,00	0,3	4500	3,1
10100405	SSA 881 TAB K450	114,3	500	3,69	0,3		
10100407	SSA 881 TAB K750	190,5	500	5,50	0,3		


881 B

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Pins: Martensitic 1.4057 | Backflex radius min.: 60 mm

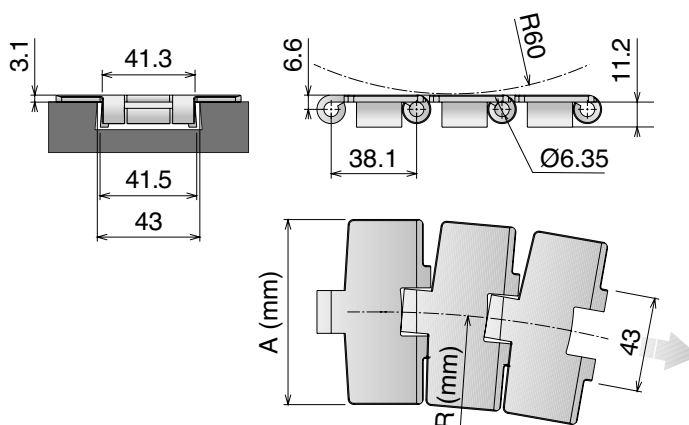

BEVEL SYSTEM



80 links



pg. 80-81/110



pg. 174



pg. 662>665

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	---------	----------------	----------------------	-------------------------	-----------------------

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

10120102	SSE 881 K325	82,5	457	2,95	0,3	6000	3,1
10120104	SSE 881 K350	88,9	500	3,00	0,3		
10120105	SSE 881 K450	114,3	500	3,65	0,3		
10120107	SSE 881 K750	190,5	500	5,45	0,3		

SSA Austenitic Stainless Steel (AISI 304) - Austenitic pin

10120402	SSA 881 K325	82,5	457	2,95	0,3	4500	3,1
10120405	SSA 881 K450	114,3	500	3,65	0,3		
10120407	SSA 881 K750	190,5	500	5,45	0,3		


8811 TAB

Catena curvilinea

Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 70 mm

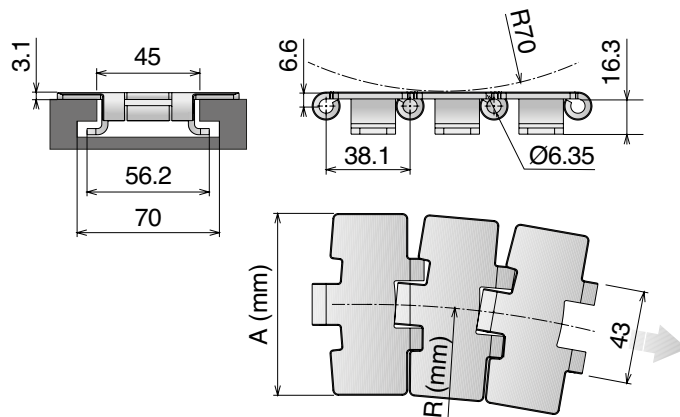

TAB SYSTEM

10 feet
3.048 m
80 links

pg. 80-81/110

pg. 163/175

pg. 662>665

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	---------	----------------	----------------------	-------------------------	-----------------------

SS Ferritic Stainless Steel (1.4016)

10140202	SS 8811 TAB K325	82,5	500	2,95	0,3	5400	3,1
10140203	SS 8811 TAB K330	83,8	500	3,05	0,3		
10140205	SS 8811 TAB K450	114,3	610	3,65	0,3		
10140207	SS 8811 TAB K750	190,5	610	5,45	0,3		

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

10140102	SSE 8811 TAB K325	82,5	500	2,95	0,3	6000	3,1
10140103	SSE 8811 TAB K330	83,8	500	3,05	0,3		
10140104	SSE 8811 TAB K350	88,9	500	3,15	0,3		
10140105	SSE 8811 TAB K450	114,3	500	3,65	0,3		
10140107	SSE 8811 TAB K750	190,5	500	5,45	0,3		


SSA Austenitic Stainless Steel (AISI 304) - Austenitic pin

10140402	SSA 8811 TAB K325	82,5	500	2,95	0,3	4500	3,1
10140403	SSA 8811 TAB K330	83,8	500	3,05	0,3		
10140405	SSA 8811 TAB K450	114,3	500	3,65	0,3		
10140407	SSA 8811 TAB K750	190,5	500	5,45	0,3		

8811 R TAB

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Pins: Martensitic 1.4057 | Backflex radius min.: 80 mm

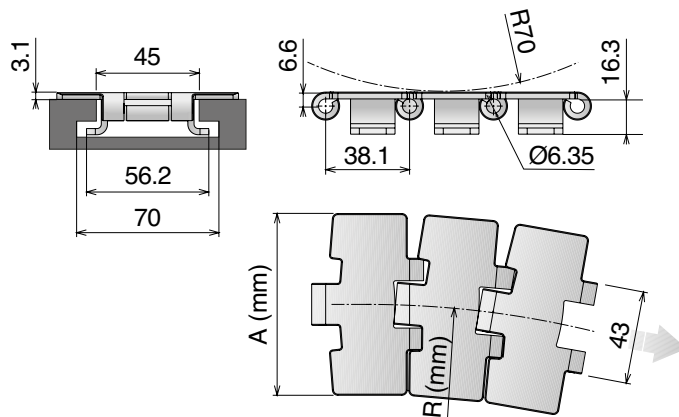

TAB SYSTEM

SMALL RADIUS




Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
SS Ferritic Stainless Steel (1.4016)							
10240202	SS 8811R TAB K325	82,5	200	2,78	0,3	5400	3,1

8811 TAB GT

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Pins: Martensitic 1.4057 | Backflex radius min.: 80 mm

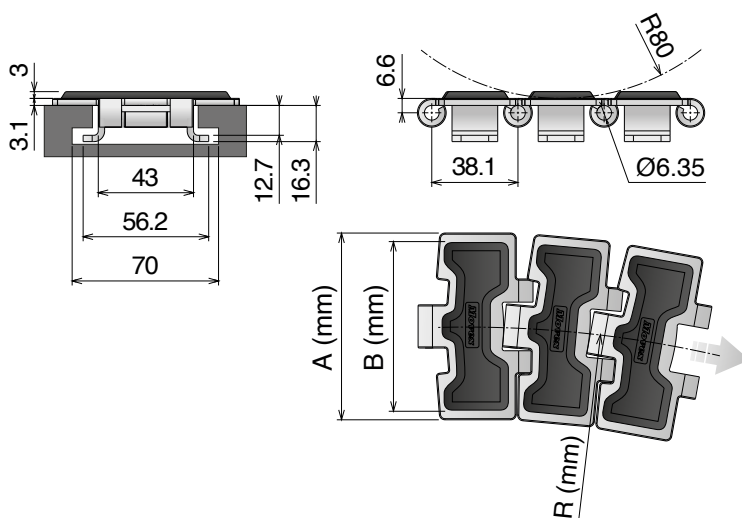

TAB SYSTEM





Article-Nr.	Ref.	A (Plate Width) mm	B (Plate Width) mm	R mm	Weight kg/m	Max working load (N)	Plate/Rubber Thickness mm
SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins							
10150102	SSE 8811 TAB GT K325	82,5	75	500	3,20	6000	Plate 3,1
10150107	SSE 8811 TAB GT K750	190,5	140	610	5,70		Rubber 3

8811 B

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 80 mm

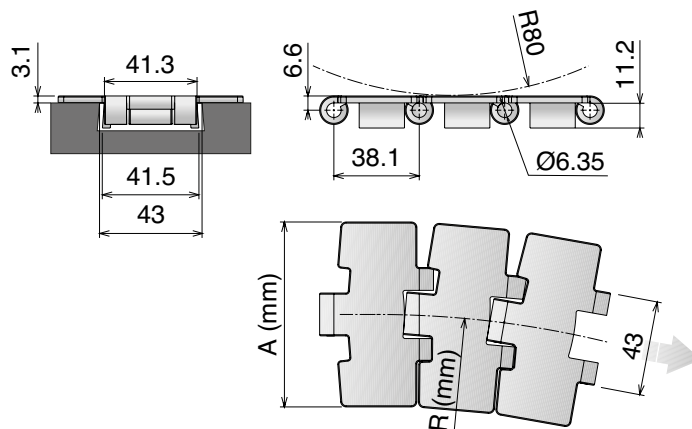**BEVEL SYSTEM**

80 links



pg. 80-81/110



pg. 174



pg. 662>665

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	---------	----------------	----------------------	-------------------------	-----------------------

SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins

10160102	SSE 8811 K325	82,5	500	2,90	0,3	6000	3,1
10160104	SSE 8811 K350	88,9	500	3,15	0,3		
10160105	SSE 8811 K450	114,3	500	3,60	0,3		
10160107	SSE 8811 K750	190,5	500	5,40	0,3		

SSA Austenitic Stainless Steel (AISI 304) - Austenitic pin



10160402	SSA 8811 K325	82,5	500	2,90	0,3	4500	3,1
10160404	SSA 8811 K350	88,9	500	3,15	0,3		
10160405	SSA 8811 K450	114,3	500	3,60	0,3		
10160407	SSA 8811 K750	190,5	500	5,40	0,3		

8857 M

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 80 mm

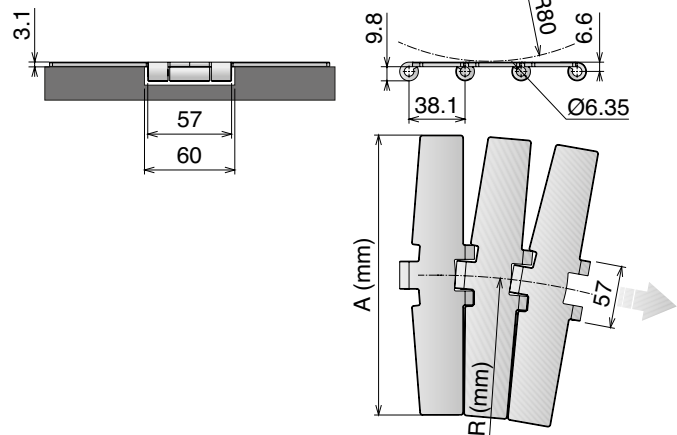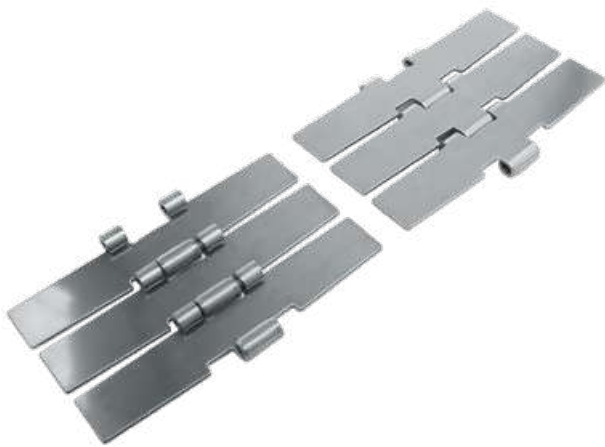

MAGNETIC SYSTEM

10 feet
3.048 m
80 links

pg. 83-93/110

pg. 132->134

pg. 662->665



Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins							
10180107	SSE 8857 M K750	190,5	750	5,30	0,3	7000	3,1

8857 M GT

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Martensitic 1.4057 | Backflex radius min.: 70 mm

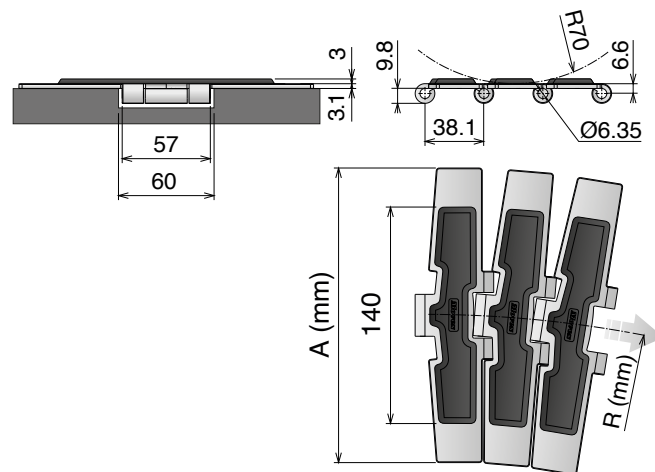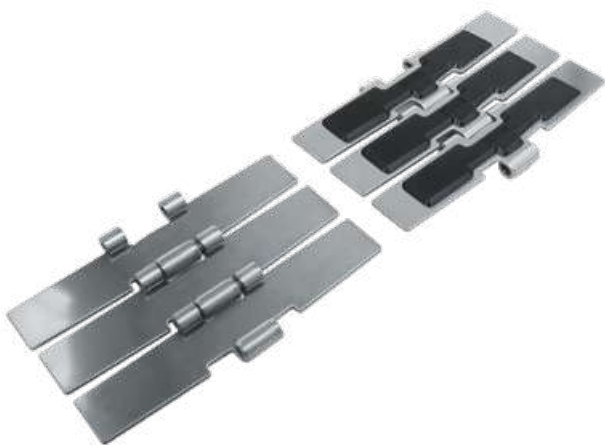

MAGNETIC SYSTEM

10 feet
3.048 m
80 links

pg. 83-93/110

pg. 131->136

pg. 662->665

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate/Rubber Thickness mm
SSE Specially treated Ferritic Stainless Steel (1.4589) - Hardened pins							
10190107	SSE 8857 M GT K750	190,5	750	5,70	0,3	10000	Plate 3,1 Rubber 3

1874 TAB


Catene in acciaio / Steel chains / Scharnierbandketten aus Edelstahl

1874 TAB

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette


Delivery: **Easy** **Standard**

Backflex radius min.: 250 mm

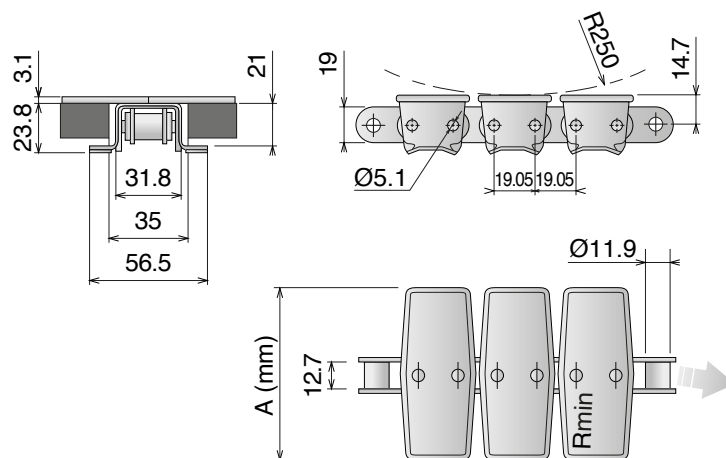

Standard lenght roller chain: 160 Pitches

TAB SYSTEM



Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Surface finish µm	Max working load (N)	Plate Thickness mm
-------------	------	-----------------------	---------	----------------	----------------------	-------------------------	-----------------------

SSA Austenitic Stainless Steel (AISI 304)

10220202	SS 1874 TAB K325	82,5	381	4,20	0,5	4500	3,1
10220205	SS 1874 TAB K450	114,3	381	4,80	0,5		
10220206	SS 1874 TAB K600	152,4	457	5,70	0,5		
10220207	SS 1874 TAB K750	190,5	610	6,40	0,5		



820	820 V	820 Plastic pin	828	831	821
					
Pag 29/30	Pag 31	Pag 31	Pag 32	Pag 33	Pag 34

821 GT	821 LBP	8257	8257 GT	8257 LBP	878 TAB
					
Pag 35	Pag 36	Pag 37	Pag 38	Pag 39	Pag 40

879 M	879 TAB	888 TAB	888 TAB GT	880 M	880 TAB
					
Pag 41	Pag 42	Pag 43	Pag 44	Pag 45	Pag 46

880 V TAB	880 TAB Plastic pin	880 TAB B0	880 B	882 M	882 M GT
					
Pag 47	Pag 48	Pag 48	Pag 49	Pag 50	Pag 51


882 M LBP	882 TAB	882 TAB GT	882 TAB LBP	1873	1873 GT
					
Pag 52	Pag 53	Pag 54	Pag 55	Pag 56	Pag 57

1873 GRIPPER GS1	1873 GRIPPER GS2	1873 GRIPPER GS4	1873 D-SHAPE	1873 MX1	1873 MX2
					
Pag 58	Pag 59	Pag 60	Pag 61	Pag 62	Pag 63


878 GRIPPER GS1	878 GRIPPER GS2	878 GRIPPER GS4	1843	SP 1883	SP 1883 GT
					
Pag 64	Pag 64	Pag 64	Pag 65	Pag 66	Pag 67

CC 600	CC 600 TAB	CC 600 D	CC 600 D TAB	CC 1400	CC 1400 TAB
					
Pag 68	Pag 68	Pag 69	Pag 69	Pag 70	Pag 70

Material
Info:



pg. 651 > 661

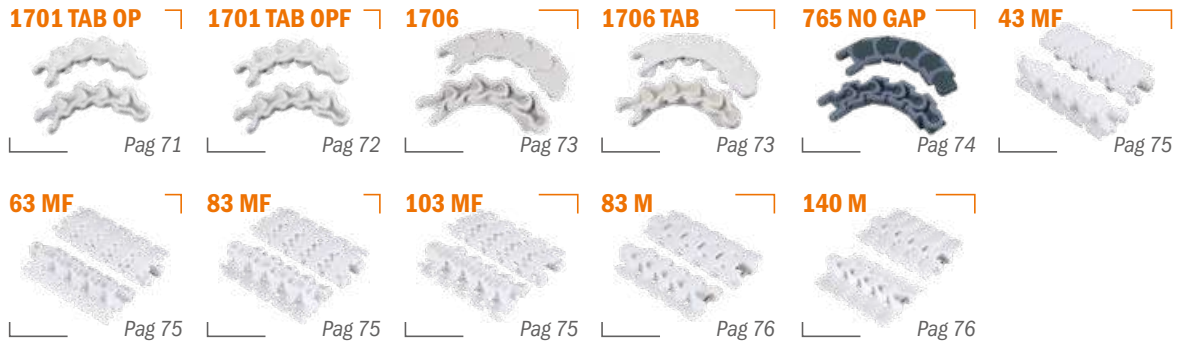

PFX

The best choice for dry running applications.

PFX is the plastic material specifically developed for chains and belts in order to run with limited lubrication or in dry applications where the demands are extreme concerning speed, performance & efficiency.

Realizing the many advantages and the versatility of our plastic compound, a growing number of companies are implementing **PFX** into their production lines with excellent results. Contact us, and request a free quotation!

Plastic chains available:

820 FT



828 FT



880 M



880 TAB



Low friction

Developed to reduce friction between chain and product, and chain and wearstrip.



Minimal dusting

Developed to avoid dusting under extreme circumstances.



Food contact Certified

PFX material is suitable in food application.



High performance

Longer wear life lead to excellent and long enduring product handling features.



Control of cost

Better control of total cost & sustainable conveyor technology.



Patented material

PFX is an exclusive product of Movex.

Other different types of product in PFX are on request.

Energy saving

Low friction

High efficiency

High visibility






FDA APPROVAL

820

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

IMPROVED DESIGNDelivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

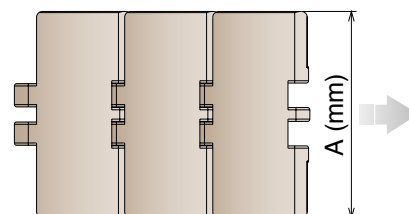

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/ m	Max working load N	Material
11010102	LF 820 K325	82,5	0,89	1625	LF
11010103	LF 820 K330	83,8	0,90		
11010104	LF 820 K350	88,9	0,91		
11010114	LF 820 K400	101,6	0,95		
11010105	LF 820 K450	114,3	1,00		
11010106	LF 820 K600	152,4	1,22		
11010107	LF 820 K750	190,5	1,43		
11010302	MX 820 K325	82,5	0,89	1260	MX
11010303	MX 820 K330	83,8	0,90		
11010304	MX 820 K350	88,9	0,91		
11010314	MX 820 K400	101,6	0,95		
11010305	MX 820 K450	114,3	1,00		
11010306	MX 820 K600	152,4	1,22		
11010307	MX 820 K750	190,5	1,43		

820 Series


PRODUCT UPDATE

Movex created an optimized version in which the gap between the links is 45% lower and the contact surface has increased up to a maximum of 15%: the result is an improved product stability. The new design is completely interchangeable and connectable with the previous one.


Advantages:

- Improved stability
- Increased sliding surface
- Minimized open gap
- Same backflex radius



PREVIOUS VERSION



CURRENT VERSION



-45%
OPEN
GAP



+15%
CONTACT
SURFACE




820

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

IMPROVED DESIGN


Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

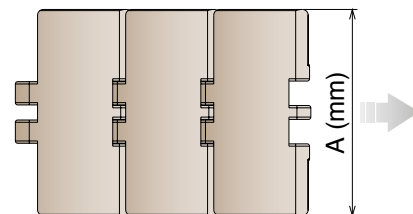

-45%
OPEN GAP

+15%
CONTACT SURFACE





Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11013002	PFX 820 K325	82,5	0,89	1260	PFX
11013003	PFX 820 K330	83,8	0,90		
11013004	PFX 820 K350	88,9	0,91		
11013014	PFX 820 K400	101,6	0,95		
11013005	PFX 820 K450	114,3	1,00		
11013006	PFX 820 K600	152,4	1,22		
11013007	PFX 820 K750	190,5	1,43		
11012502	MPX 820 K325	82,5	0,89	1625	MPX
11012503	MPX 820 K330	83,8	0,90		
11012504	MPX 820 K350	88,9	0,91		
11012514	MPX 820 K400	101,6	0,95		
11012505	MPX 820 K450	114,3	1,00		
11012506	MPX 820 K600	152,4	1,22		
11012507	MPX 820 K750	190,5	1,43		
11011602	DKM 820 K325	82,5	0,89	1625	DKM
11011603	DKM 820 K330	83,8	0,90		
11011604	DKM 820 K350	88,9	0,91		
11011614	DKM 820 K400	101,6	0,95		
11011605	DKM 820 K450	114,3	1,00		
11011606	DKM 820 K600	152,4	1,22		
11011607	DKM 820 K750	190,5	1,43		
11011702	MWX 820 K325	82,5	0,89	1625	MWX
11011703	MWX 820 K330	83,8	0,90		
11011704	MWX 820 K350	88,9	0,91		
11011714	MWX 820 K400	101,6	0,95		
11011705	MWX 820 K450	114,3	1,00		
11011706	MWX 820 K600	152,4	1,22		
11011707	MWX 820 K750	190,5	1,43		

820 V

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

IMPROVED DESIGN

Pins: Stainless Steel | Backflex radius min.: 50 mm

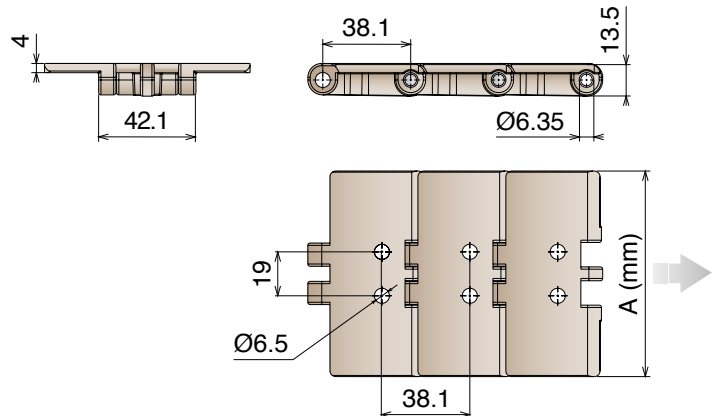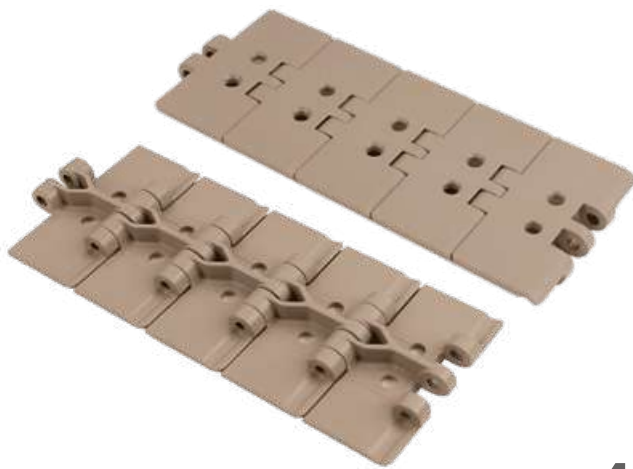

-45%
OPEN GAP

+15%
CONTACT SURFACE

10 feet
3.048 m
80 links

84-85-94/108

pg. 651>661


Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11550102	LF 820 V2 K325	82,5	0,89	1625	LF
11550105	LF 820 V2 K450	114,3	1,00		

820

Plastic pin Catena rettilinea con perno in plastica
Straight running chain with plastic pin / Geradegängige Scharnierbandkette mit plastic bolzen

IMPROVED DESIGN

Pins: Reinforced acetal resin | Backflex radius min.: 50 mm

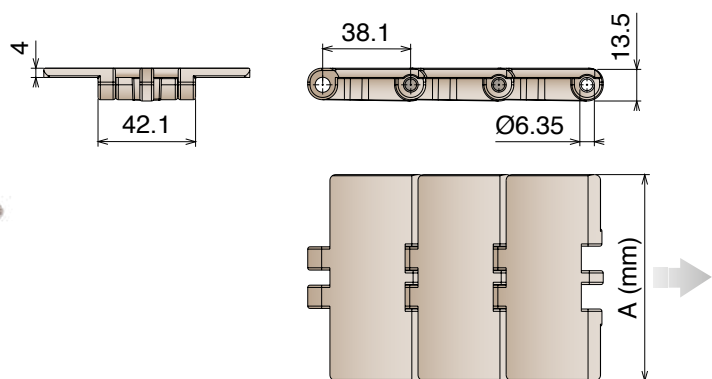

-45%
OPEN GAP

+15%
CONTACT SURFACE

10 feet
3.048 m
80 links





84-85-94/108

pg. 651>661

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11630102	LF 820 K325	82,5	0,69	650	LF
11630105	LF 820 K450	114,3	0,80		

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

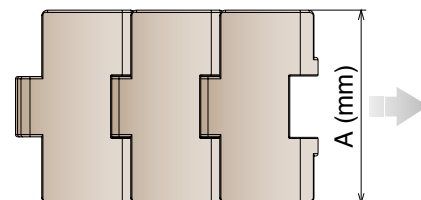



Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/ m	Max working load N	Material
11020102	LF 828 K325	82,5	1,07	2320	LF
11020103	LF 828 K330	83,8	1,13		
11020302	MX 828 K325	82,5	1,07	1860	MX
11020303	MX 828 K330	83,8	1,13		
11023002	PFX 828 K325	82,5	1,07	1860	PFX
11023003	PFX 828 K330	83,8	1,13		
11022502	MPX 828 K325	82,5	1,07	2320	MPX
11022503	MPX 828 K330	83,8	1,13		

831

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**





Pins: Stainless Steel | Backflex radius min.: 50 mm

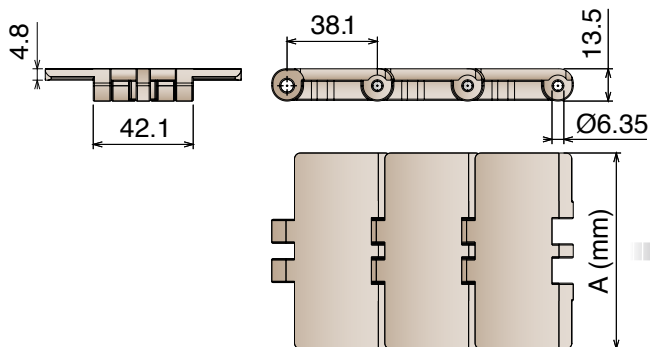

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11030102	LF 831 K325	82,5	1,00	1625	LF
11030105	LF 831 K450	114,3	1,28		
11030107	LF 831 K750	190,5	1,80		
11030302	MX 831 K325	82,5	1,00	1260	MX
11030305	MX 831 K450	114,3	1,28		
11030307	MX 831 K750	190,5	1,80		

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm






Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11040107	LF 821 K750	190,5	2,55	2770	LF
11040108	LF 821 K1000	254,0	3,05		
11040109	LF 821 K1200	304,8	3,35		
11040307	MX 821 K750	190,5	2,55	2200	MX
11040308	MX 821 K1000	254,0	3,05		
11040309	MX 821 K1200	304,8	3,35		
11042507	MPX 821 K750	190,5	2,55	2770	MPX
11042508	MPX 821 K1000	254,0	3,05		
11042509	MPX 821 K1200	304,8	3,35		

821 GT

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm | TPE Rubber: 50 ShA

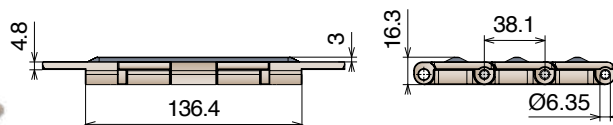

Article-Nr.	Ref.	A (Plate Width) mm	B (Rubber Width) mm	Weight kg/m	Max working load N	Material
11050107	LF 821 GT K750	190,5	134,0	2,55	2770	LF
11050108	LF 821 GT K1000	254,0	192,0	3,05		
11050109	LF 821 GT K1200	304,8	252,0	3,35		
11050307	MX 821 GT K750	190,5	134,0	2,55	2200	MX
11050308	MX 821 GT K1000	254,0	192,0	3,05		
11050309	MX 821 GT K1200	304,8	252,0	3,35		

821 LBP

Catene in plastica / Plastic chains / Kunststoffkette



821 LBP

Catena rettilinea


Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**


Pins: Stainless Steel | Backflex radius min.: 150 mm

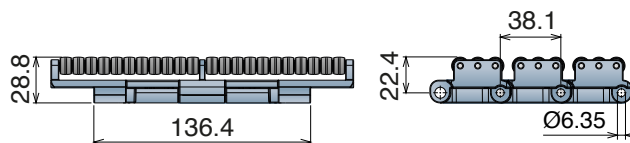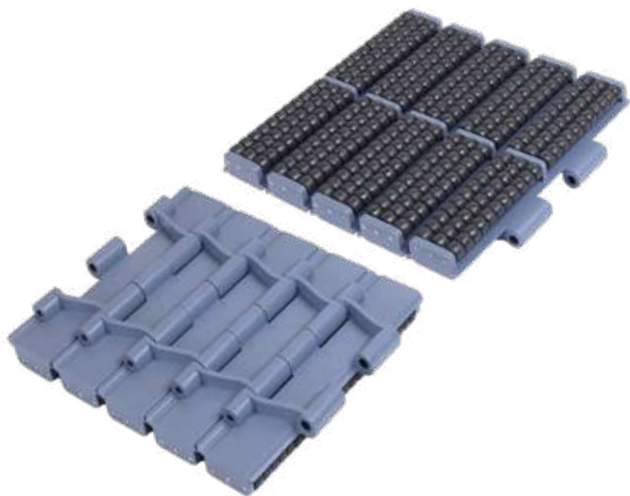


K750



K1000

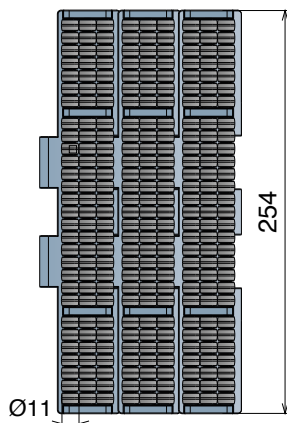


K1200

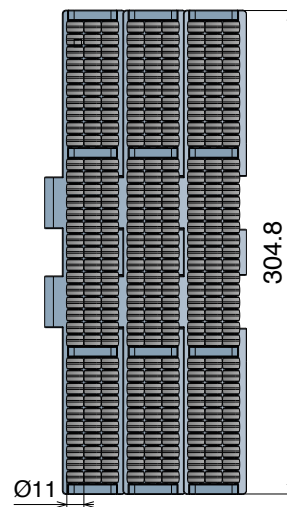

40 links



pg. 82/109



pg. 651>661


Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11060107	LFA 821 LBP K750	190,5	5,70	2770	LFA
11060108	LFA 821 LBP K1000	254,0	7,05		
11060109	LFA 821 LBP K1200	304,8	8,21		

8257

Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

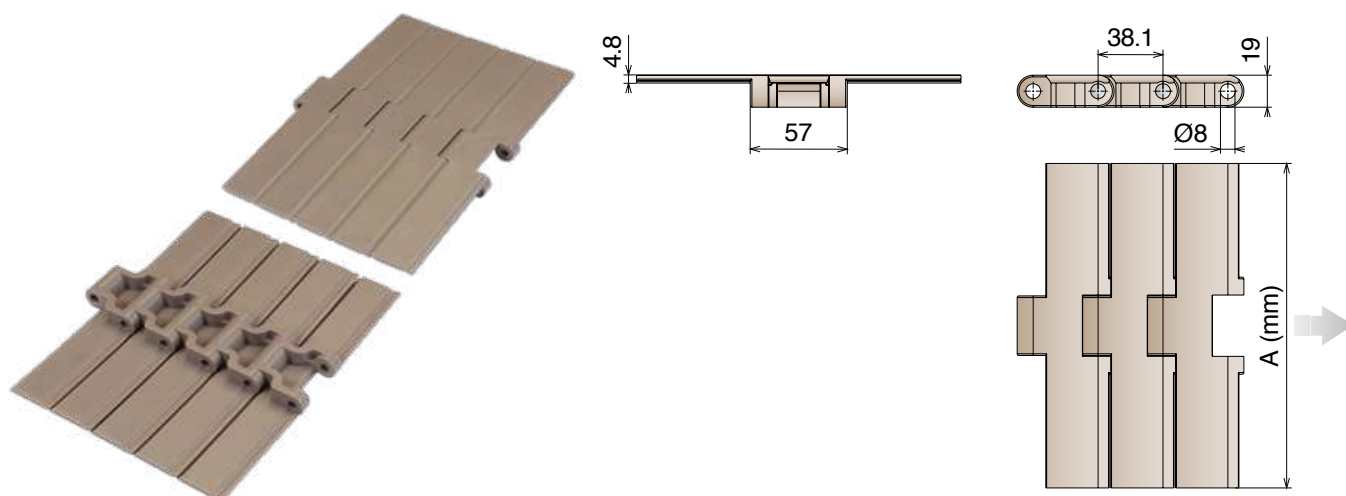

10 feet
3.048 m
80 links

pg. 90-91/110

pg. 651>661

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11070107	LF 8257 K750	190,5	2,55	3830	LF
11070108	LF 8257 K1000	254,0	3,05		
11070109	LF 8257 K1200	304,8	3,35		
11070307	MX 8257 K750	190,5	2,55	3050	MX
11070308	MX 8257 K1000	254,0	3,05		
11070309	MX 8257 K1200	304,8	3,35		

8257 GT

Catene in plastica / Plastic chains / Kunststoffkette





8257 GT

Catena rettilinea

Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm | TPE Rubber: 50 ShA

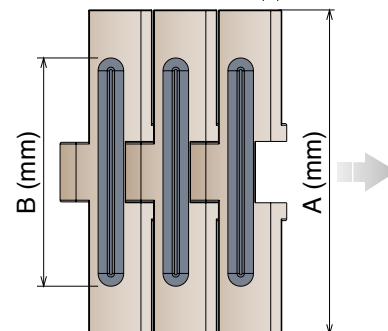


Article-Nr.	Ref.	A (Plate Width) mm	B (Rubber Width) mm	Weight kg/m	Max working load N	Material
11080107	LF 8257 GT K750	190,5	134,0	2,55	3830	LF
11080108	LF 8257 GT K1000	254,0	192,0	2,60		
11080109	LF 8257 GT K1200	304,8	252,0	2,95		

8257 LBP


Catena rettilinea
Straight running chain / Geradegängige Scharnierbandkette

Delivery: **Easy** **Standard**


Pins: Stainless Steel | Backflex radius min.: 200 mm

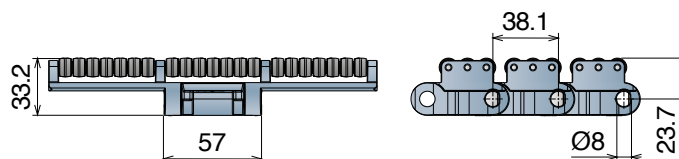



K750

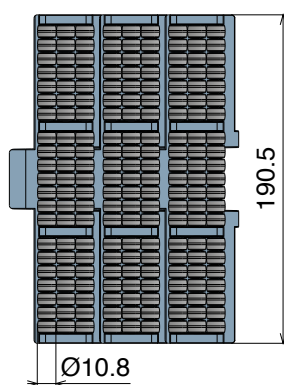

K1000

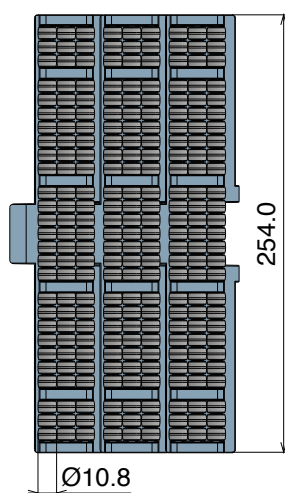

K1200

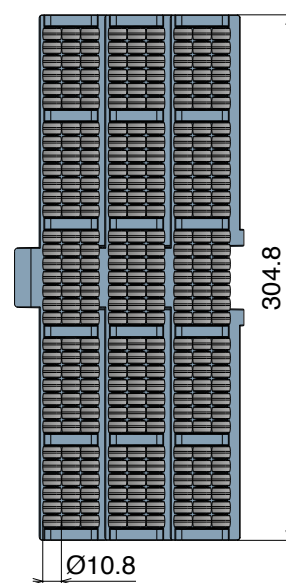

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11090107	LFA 8257 LBP K750	190,5	5,65	3830	LFA
11090108	LFA 8257 LBP K1000	254,0	7,16		
11090109	LFA 8257 LBP K1200	304,8	8,05		

878 TAB



Catene in plastica / Plastic chains / Kunststoffkette

878 TAB



Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

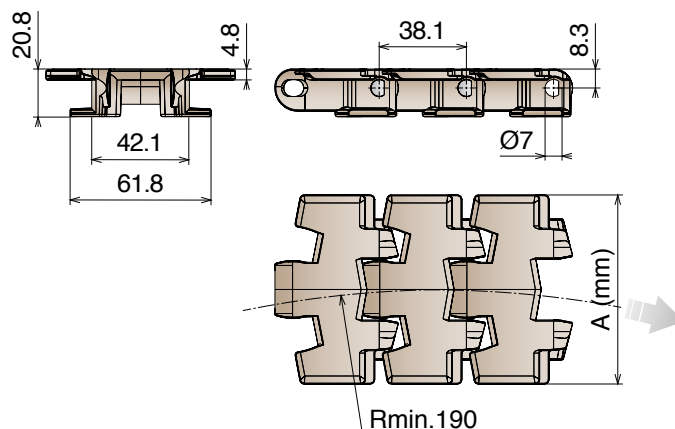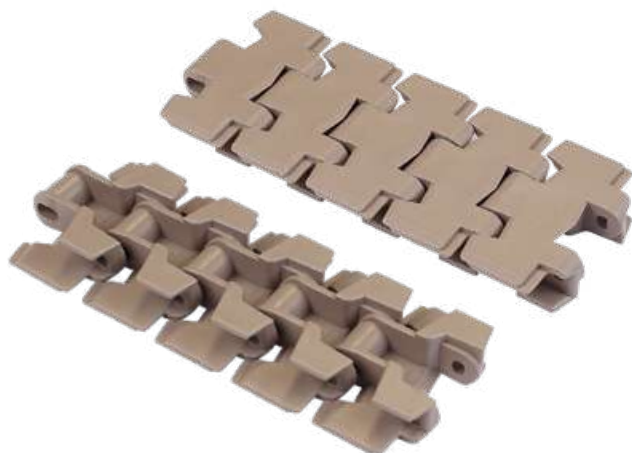

TAB SYSTEM




Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11190102	LF 878 TAB K325	82,5	1,06	2200	LF
11190105	LF 878 TAB K450	114,3	1,18		
11190302	MX 878 TAB K325	82,5	1,06	1750	MX
11190305	MX 878 TAB K450	114,3	1,18		
11191602	DKM 878 TAB K325	82,5	1,06	2200	DKM
11191605	DKM 878 TAB K450	114,3	1,18		

879 M


Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Ferritic Stainless Steel | Backflex radius min.: 50 mm

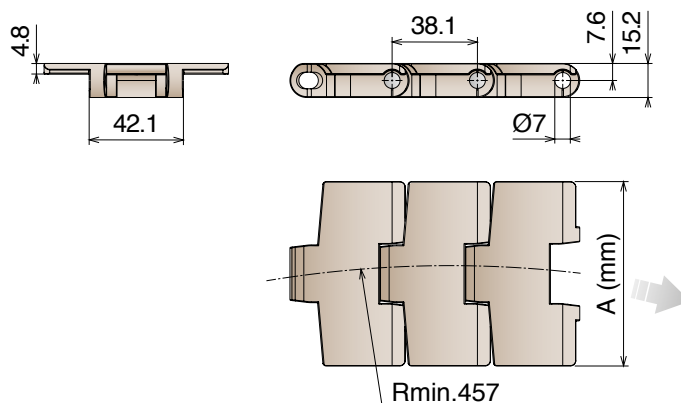

MAGNETIC SYSTEM




Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Material
11240102	LF 879 M K325	82,5	457	1,05	2200	LF
11240105	LF 879 M K450	114,3	457	1,15		
11240302	MX 879 M K325	82,5	457	1,05	1750	MX
11240305	MX 879 M K450	114,3	457	1,15		

879 TAB


Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

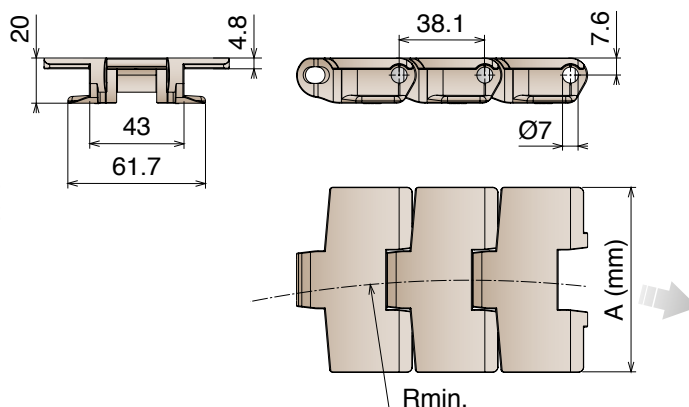

TAB SYSTEM





Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Material
11250102	LF 879 TAB K325	82,5	457	1,01	2200	LF
11250105	LF 879 TAB K450	114,3	610	1,13		
11250302	MX 879 TAB K325	82,5	457	1,01	1750	MX
11250305	MX 879 TAB K450	114,3	610	1,13		
11252502	MPX 879 TAB K325	82,5	457	1,01	2200	MPX
11252505	MPX 879 TAB K450	114,3	610	1,13		
11251702	MWX 879 TAB K325	82,5	457	1,01	2200	MWX
11251705	MWX 879 TAB K450	114,3	610	1,13		


888 TAB

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette


Pins: Stainless Steel | Backflex radius min.: 150 mm




W80




W140



W200

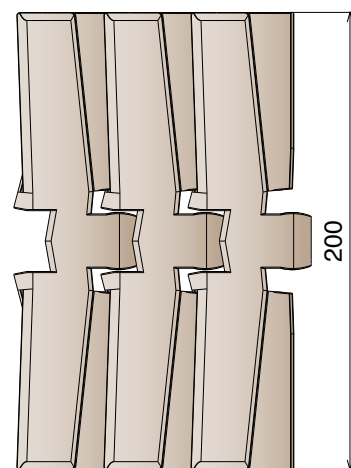

TAB SYSTEM



Article-Nr.	Ref.	Plate Width mm	R mm	Weight kg/m	Max working load N	Material
11700119	LF 888 TAB W80	80,0	200	1,05	2200	LF
11700120	LF 888 TAB W140	140,0	500	1,32		
11700121	LF 888 TAB W200	200,0	500	1,62		

888 TAB GT



Catene in plastica / Plastic chains / Kunststoffkette

888 TAB GT


Catena curvilinea

Sideflexing chain / Kurvengängige Scharnierbandkette


Pins: Stainless Steel | Backflex radius min.: 150 mm | TPE Rubber: 75 ShA




W80

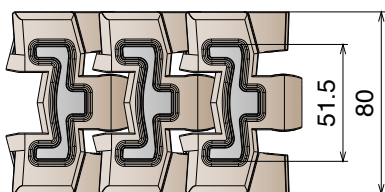


W140

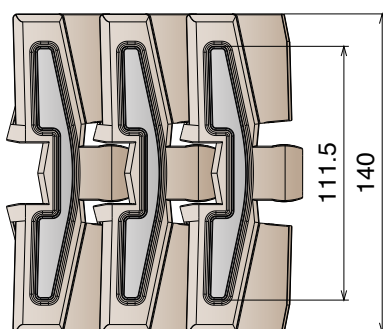

W200

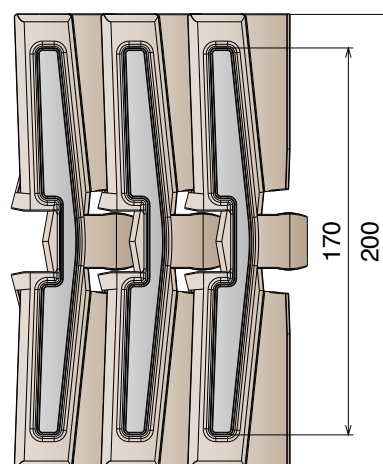

TAB SYSTEM



Article-Nr.	Ref.	Plate Width mm	R mm	Weight kg/m	Max working load N	Material
11710119	LF 888 TAB GT W80	80,0	200	1,15	2200	LF
11710120	LF 888 TAB GT W140	140,0	500	1,43		
11710121	LF 888 TAB GT W200	200,0	500	1,75		


Movex®

880 M

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Ferritic Stainless Steel | Backflex radius min.: 50 mm

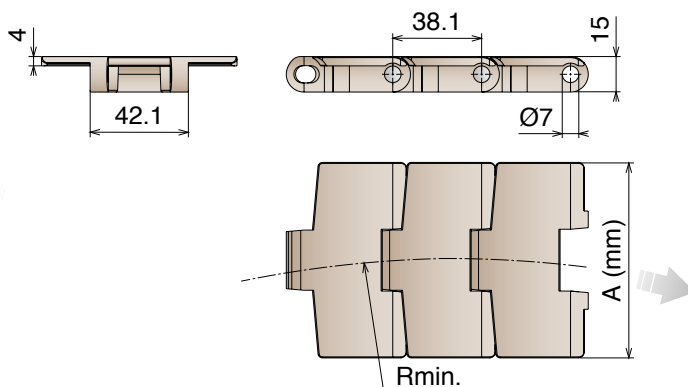**MAGNETIC SYSTEM**

80 links



pg. 88-89/108



pg. 115>128



pg. 651>661

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Material
11100102	LF 880 M K325	82,5	457	1,05	2200	LF
11100103	LF 880 M K330	83,8	457	1,09		
11100105	LF 880 M K450	114,3	457	1,15		
11100302	MX 880 M K325	82,5	457	1,05	1750	MX
11100303	MX 880 M K330	83,8	457	1,09		
11100305	MX 880 M K450	114,3	457	1,15		
11103002	PFX 880 M K325	82,5	457	1,05	1750	PFX
11103003	PFX 880 M K330	83,8	457	1,09		
11103005	PFX 880 M K450	114,3	457	1,15		
11102502	MPX 880 M K325	82,5	457	1,05	2200	MPX
11102503	MPX 880 M K330	83,8	457	1,09		
11102505	MPX 880 M K450	114,3	457	1,15		
11101702	MWX 880 M K325	82,5	457	1,05	2200	MWX
11101703	MWX 880 M K330	83,8	457	1,09		
11101705	MWX 880 M K450	114,3	457	1,15		

880 TAB



Catene in plastica / Plastic chains / Kunststoffkette

880 TAB


Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 40 mm

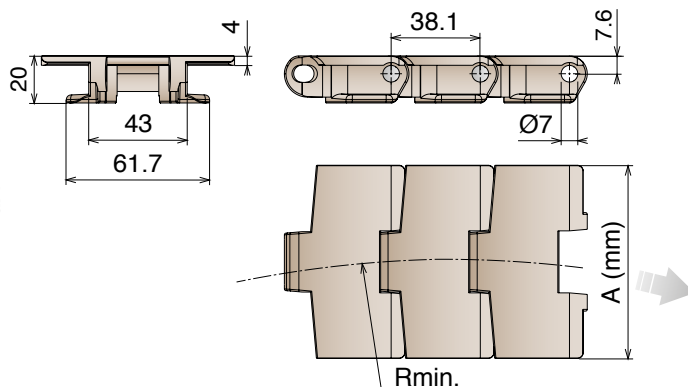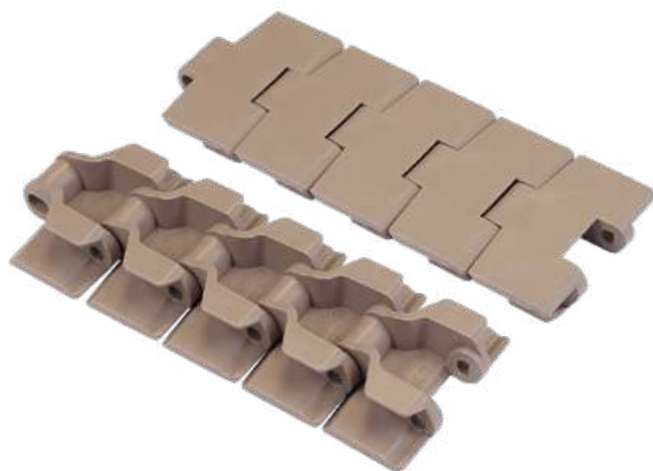

TAB SYSTEM





Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Material
11110102	LF 880 TAB K325	82,5	457	1,015	2200	LF
11110103	LF 880 TAB K330	83,8	457	1,018		
11110105	LF 880 TAB K450	114,3	457	1,09		
11110302	MX 880 TAB K325	82,5	457	1,015	1750	MX
11110303	MX 880 TAB K330	83,8	457	1,018		
11110305	MX 880 TAB K450	114,3	457	1,09		
11113002	PFX 880 TAB K325	82,5	457	1,015	1750	PFX
11113003	PFX 880 TAB K330	83,8	457	1,018		
11113005	PFX 880 TAB K450	114,3	457	1,09		
11112502	MPX 880 TAB K325	82,5	457	1,015	2200	MPX
11112503	MPX 880 TAB K330	83,8	457	1,018		
11112505	MPX 880 TAB K450	114,3	457	1,09		
11111602	DKM 880 TAB K325	82,5	457	1,015	2200	DKM
11111603	DKM 880 TAB K330	83,8	457	1,018		
11111605	DKM 880 TAB K450	114,3	457	1,09		
11111702	MWX 880 TAB K325	82,5	457	1,015	2200	MWX
11111703	MWX 880 TAB K330	83,8	457	1,018		
11111705	MWX 880 TAB K450	114,3	457	1,09		

880 V TAB

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 40 mm

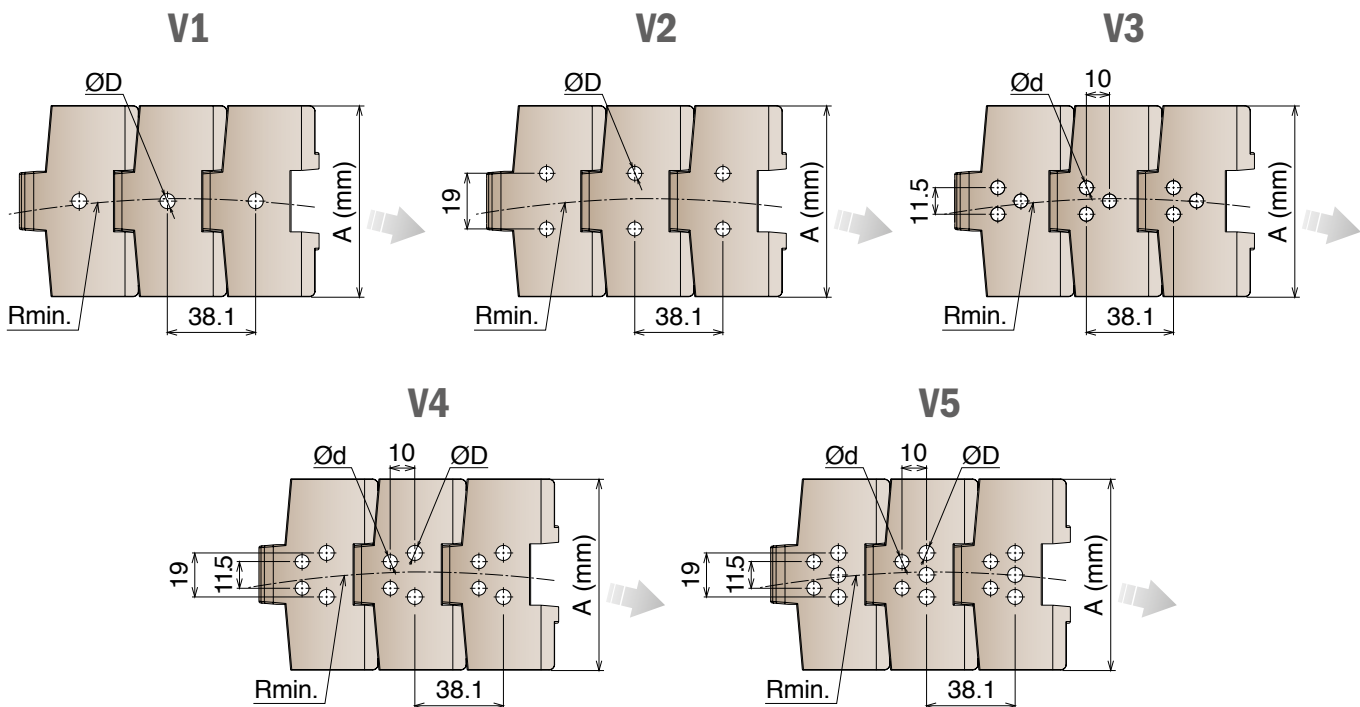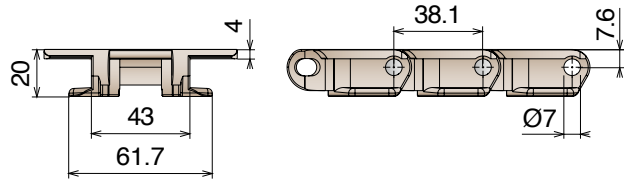

TAB SYSTEM





Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	ØD mm	Ød mm	Max working load N	Material
11560102	LF 880 V1 K325	82,5	457	1,015	6,5	6	2200	LF
11570102	LF 880 V2 K325	82,5	457	1,015				
11580102	LF 880 V3 K325	82,5	457	1,015				
11560102-V4	LF 880 V4 K325	82,5	457	1,015				
11560102-V5	LF 880 V5 K325	82,5	457	1,015				
11570105	LF 880 V2 K450	114,3	457	1,09				

880 TAB Plastic pin-880 TAB BO

Catene in plastica / Plastic chains / Kunststoffkette

880 TAB Plastic pin Catena curvilinea con perno in plastica Sideflexing chain with plastic pin / Kurvengängige Scharnierbandkette mit plastic bolzen

Pins: Reinforced acetal resin | Backflex radius min.: 40 mm

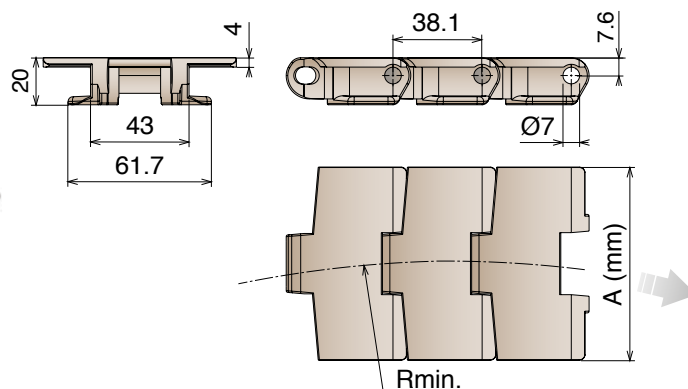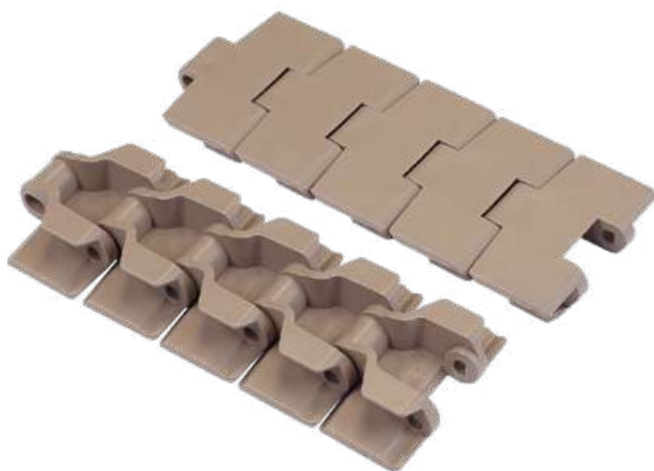

TAB SYSTEM


 10 feet 3.048 m	 pg. 88-89	 pg. 163/175	 pg. 651>661
80 links			

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Material
11660102	LF 880 TAB K325	82,5	457	0,815	550	LF
11660105	LF 880 TAB K450	114,3	457	0,89		

880 TAB BO Catena curvilinea Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** Standard

Pins: Stainless Steel | Backflex radius min.: 40 mm

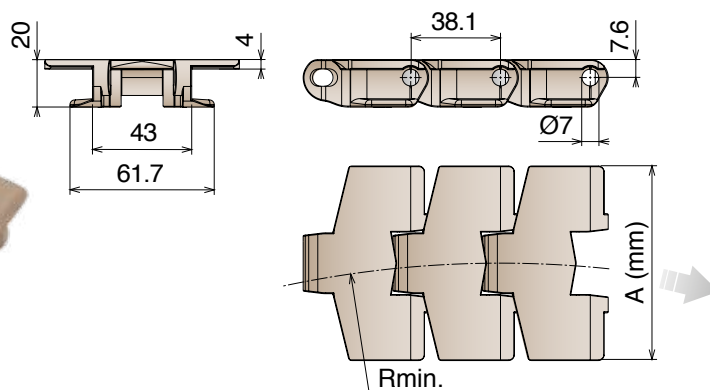

TAB SYSTEM

 10 feet 3.048 m	 pg. 88-89	 pg. 164/175	 pg. 651>661
80 links			

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Material
11260102	LF 880 TAB BO K325	82,5	190	0,96	1680	LF
11260105	LF 880 TAB BO K450	114,3	190	1,10		
11260302	MX 880 TAB BO K325	82,5	190	0,96	1350	MX
11260305	MX 880 TAB BO K450	114,3	190	1,10		


Movex

880 B

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette


Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 40 mm

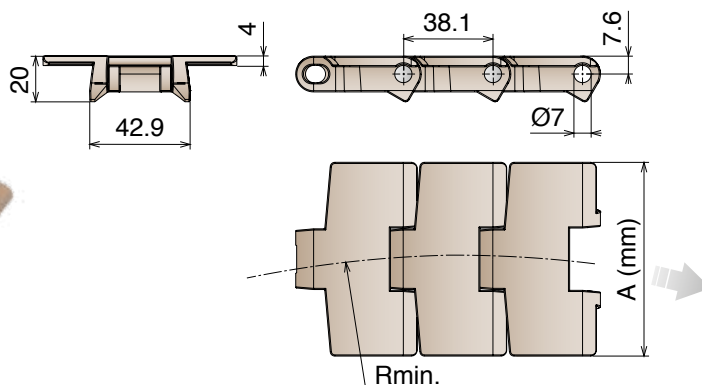**BEVEL SYSTEM**
 10 feet
3.048 m
80 links

 pg. 88-89

 pg. 174

 pg. 651>661

Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Material
11120102	LF 880 B K325	82,5	457	0,89	2200	LF
11120104	LF 880 B K350	88,9	457	0,93		
11120105	LF 880 B K450	114,3	457	1,05		
11120302	MX 880 B K325	82,5	457	0,89	1750	MX
11120304	MX 880 B K350	88,9	457	0,93		
11120305	MX 880 B K450	114,3	457	1,05		


882 M

Catena curvilinea

Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Ferritic Stainless Steel | Backflex radius min.: 50 mm

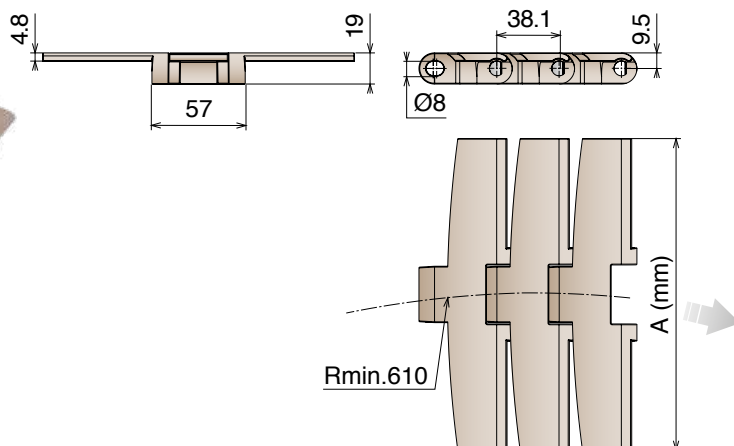

MAGNETIC SYSTEM

10 feet
3.048 m
80 links

pg. 90-91/110

pg. 131->136

pg. 651->661


Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11130107	LF 882 M K750	190,5	2,14	3830	LF
11130108	LF 882 M K1000	254,0	2,45		
11130109	LF 882 M K1200	304,8	2,68		
11130307	MX 882 M K750	190,5	2,14	3050	MX
11130308	MX 882 M K1000	254,0	2,45		
11130309	MX 882 M K1200	304,8	2,68		

882 M GT

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Ferritic Stainless Steel | Backflex radius min.: 50 mm | TPE Rubber: 50 ShA

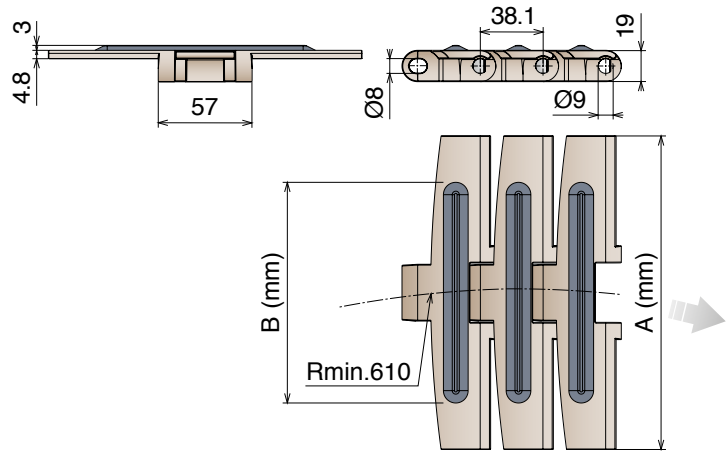

MAGNETIC SYSTEM

5 feet
1.524 m
40 links

pg. 90-91/110

pg. 131->136

pg. 651->661

Article-Nr.	Ref.	A (Plate Width) mm	B (Rubber Width) mm	Weight kg/ m	Max working load N	Material
11150107	LF 882 M GT K750	190,5	134,0	2,10	3830	LF
11150108	LF 882 M GT K1000	254,0	197,0	2,45		
11150109	LF 882 M GT K1200	304,8	249,0	2,74		

882 M LBP


Catene in plastica / Plastic chains / Kunststoffkette

882 M LBP


Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**


Pins: Ferritic Stainless Steel | Backflex radius min.: 150 mm

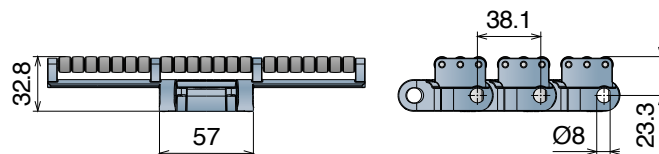


K750

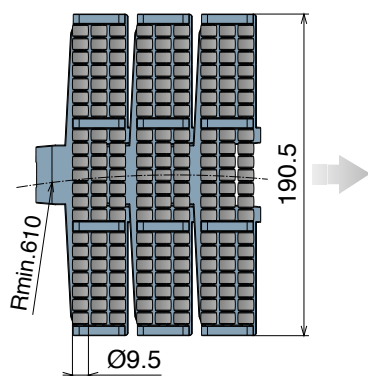

K1000

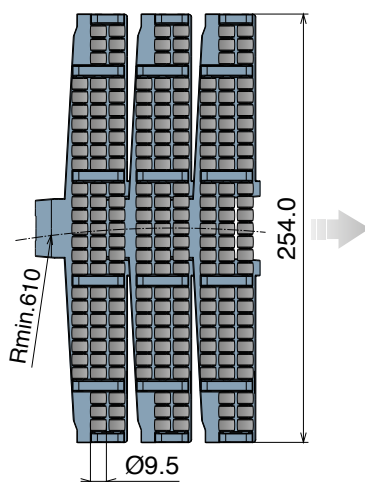

K1200

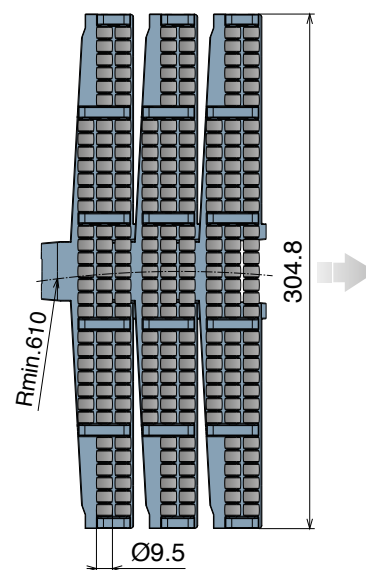

MAGNETIC SYSTEM

 5 feet 1.524 m			
40 links	pg. 90-91/110	pg. 137->140	pg. 651->661

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11170107	LFA 882 M LBP K750	190,5	3,92	3830	LFA
11170108	LFA 882 M LBP K1000	254,0	4,94		
11170109	LFA 882 M LBP K1200	304,8	5,82		




882 TAB

Catena curvilinea


Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 40 mm

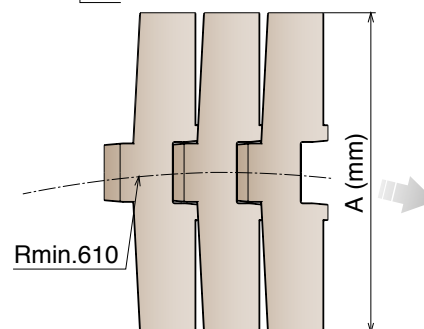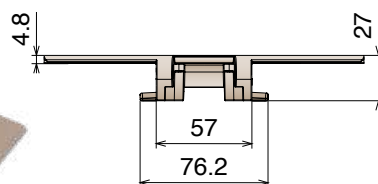

TAB SYSTEM



Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load N	Material
11140105	LF 882 TAB K450	114,3	2,05	3830	LF
11140106	LF 882 TAB K600	152,4	2,20		
11140107	LF 882 TAB K750	190,5	2,45		
11140108	LF 882 TAB K1000	254,0	2,85		
11140109	LF 882 TAB K1200	304,8	3,40		
11140305	MX 882 TAB K450	114,3	2,05	3050	MX
11140306	MX 882 TAB K600	152,4	2,20		
11140307	MX 882 TAB K750	190,5	2,45		
11140308	MX 882 TAB K1000	254,0	2,85		
11140309	MX 882 TAB K1200	304,8	3,40		
11142505	MPX 882 TAB K450	114,3	2,05	3830	MPX
11142506	MPX 882 TAB K600	152,4	2,20		
11142507	MPX 882 TAB K750	190,5	2,45		
11142508	MPX 882 TAB K1000	254,0	2,85		
11142509	MPX 882 TAB K1200	304,8	3,40		
11141705	MWX 882 TAB K450	114,3	2,05	3830	MWX
11141706	MWX 882 TAB K600	152,4	2,20		
11141707	MWX 882 TAB K750	190,5	2,45		
11141708	MWX 882 TAB K1000	254,0	2,85		
11141709	MWX 882 TAB K1200	304,8	3,40		

882 TAB GT


Catene in plastica / Plastic chains / Kunststoffkette

882 TAB GT

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 40 mm | TPE Rubber: 50 ShA

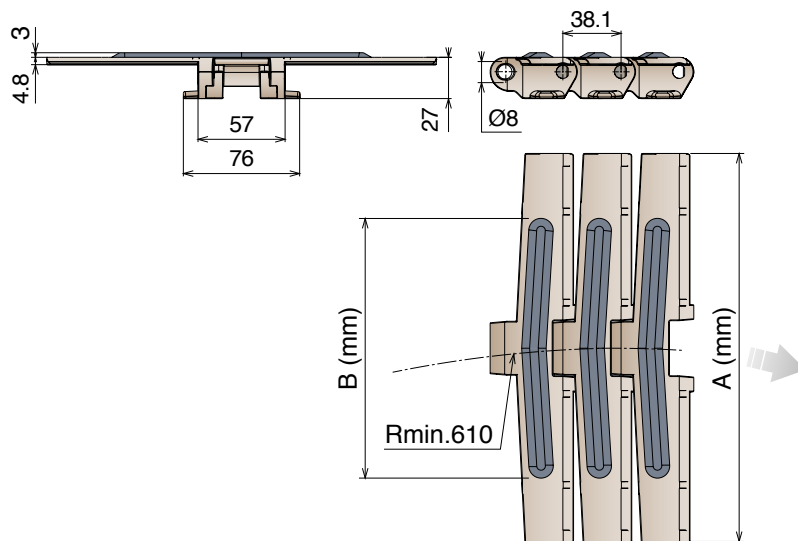

TAB SYSTEM

5 feet
1.524 m
40 links

pg. 90-91/110

pg. 166/175

pg. 651>661


Article-Nr.	Ref.	A (Plate Width) mm	B (Rubber Width) mm	Weight kg/m	Max working load N	Material
11160107	LF 882 TAB GT K750	190,5	134,0	2,37	3830	LF
11160108	LF 882 TAB GT K1000	254,0	197,0	2,67		
11160109	LF 882 TAB GT K1200	304,8	249,0	2,92		
11160307	MX 882 TAB GT K750	190,5	134,0	2,37	3050	MX
11160308	MX 882 TAB GT K1000	254,0	197,0	2,67		
11160309	MX 882 TAB GT K1200	304,8	249,0	2,92		

882 TAB LBP


Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**


Pins: Stainless Steel | Backflex radius min.: 150 mm

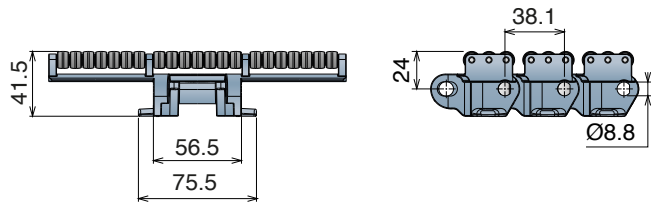


K450

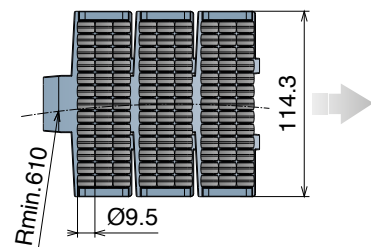


K750

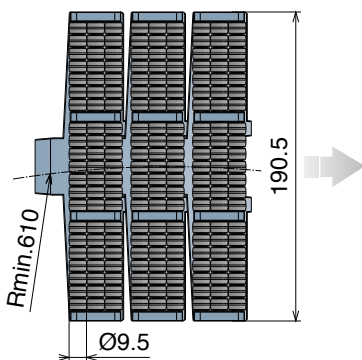


K1000

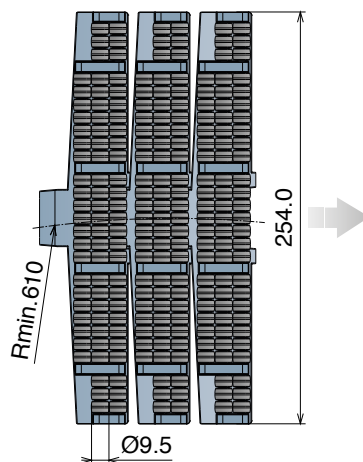

K1200

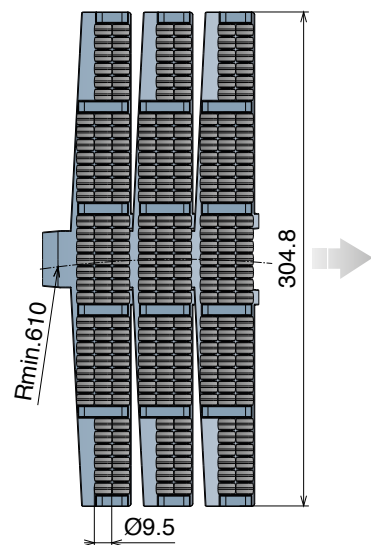






TAB SYSTEM



Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11180105	LFA 882 TAB LBP K450	114,3	4,00	3830	LFA
11180107	LFA 882 TAB LBP K750	190,5	4,70		
11180108	LFA 882 TAB LBP K1000	254,0	5,95		
11180109	LFA 882 TAB LBP K1200	304,8	6,55		

Delivery: **Easy** **Standard**

The stainless steel version is supplied with LONG-LIFE SS roller chain. | Backflex radius min.: 210 mm

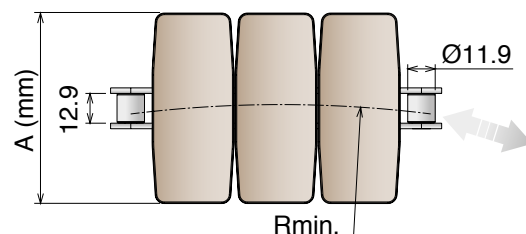

Standard lenght roller chain: 160 Pitches


TAB SYSTEM

Article-Nr.	Chain	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Backflex radius min. mm	Material
11590102	C45	LF 1873 TAB K325	82,5	355	2,10	4500	180	LF
11600102	Stainless Steel		82,5	355	2,10	3500		
11590105	C45	LF 1873 TAB K450	114,3	355	2,30	4500		
11600105	Stainless Steel		114,3	355	2,30	3500		
11590106	C45	LF 1873 TAB K600	152,4	457	2,40	4500		
11600106	Stainless Steel		152,4	457	2,40	3500		
11590107	C45	LF 1873 TAB K750	190,5	457	2,60	4500		
11600107	Stainless Steel		190,5	457	2,60	3500		
11590108	C45	LF 1873 TAB K1000	254,0	457	2,80	4500		
11600108	Stainless Steel		254,0	457	2,80	3500		
11590109	C45	LF 1873 TAB K1200	304,8	457	3,00	4500		
11600109	Stainless Steel		304,8	457	3,00	3500		
11590302	C45	MX 1873 TAB K325	82,5	355	2,10	4500	180	MX
11600302	Stainless Steel		82,5	355	2,10	3500		
11590305	C45	MX 1873 TAB K450	114,3	355	2,30	4500		
11600305	Stainless Steel		114,3	355	2,30	3500		
11590306	C45	MX 1873 TAB K600	152,4	457	2,40	4500		
11600306	Stainless Steel		152,4	457	2,40	3500		
11590307	C45	MX 1873 TAB K750	190,5	457	2,60	4500		
11600307	Stainless Steel		190,5	457	2,60	3500		
11590308	C45	MX 1873 TAB K1000	254,0	457	2,80	4500		
11600308	Stainless Steel		254,0	457	2,80	3500		
11590309	C45	MX 1873 TAB K1200	304,8	457	3,00	4500		
11600309	Stainless Steel		304,8	457	3,00	3500		

1873 GT



Catena curvilinea
Sideflexing chain / Kurvengängige Plattenbandkette

Delivery: **Easy** **Standard** The stainless steel version is supplied with LONG-LIFE SS roller chain. | TPE Rubber: 75 ShA | Backflex radius min.: 210 mm

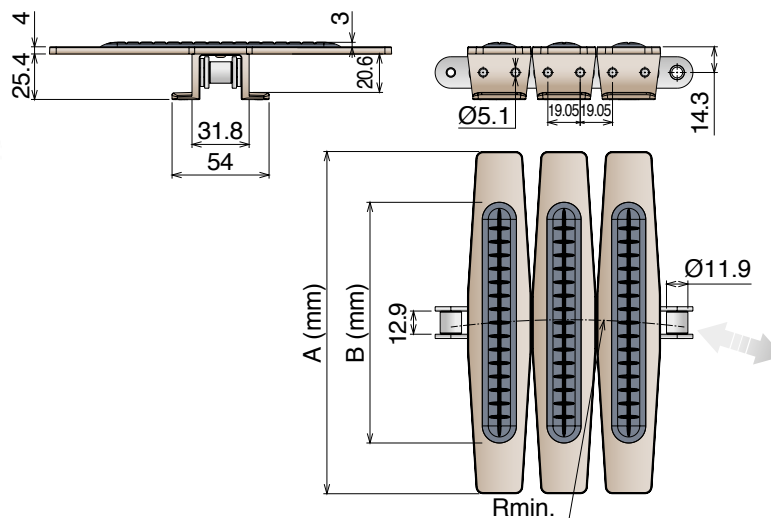

Standard lenght roller chain: 160 Pitches

TAB SYSTEM



Article-Nr.	Chain	Ref.	A (Plate Width) mm	B (Rubber Width) mm	Weight kg/m	Max working load N	Sideflex radius min. mm	Material
11610107	C45	LF 1873 GT TAB K750	190,5	134,0	2,60	4500	457	LF
11620107	Stainless Steel		190,5	134,0	2,60	3500		
11610108	C45	LF 1873 GT TAB K1000	254,0	192,0	2,80	4500		
11620108	Stainless Steel		254,0	192,0	2,80	3500		
11610109	C45	LF 1873 GT TAB K1200	304,8	252,0	3,00	4500	457	
11620109	Stainless Steel		304,8	252,0	3,00	3500		

1873 GRIPPER GS1

Catene in plastica / Plastic chains / Kunststoffkette



1873 GRIPPER GS1

Catena curvilinea

Sideflexing chain / Kurvengängige Plattenbandkette



Delivery: **Easy** **Standard**

The stainless steel version is supplied with LONG-LIFE SS roller chain. | Backflex radius min.: 150 mm

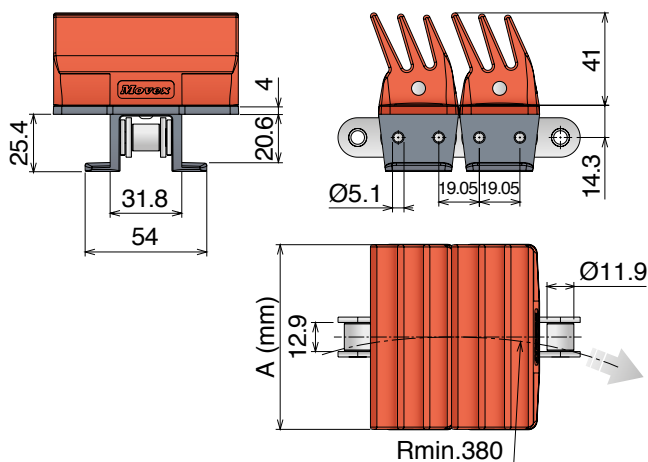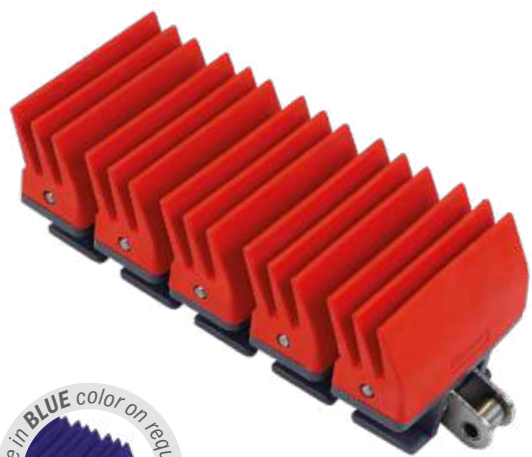

Standard lenght roller chain: 160 Pitches

TAB SYSTEM







Article-Nr.	Chain	Ref.	A (Width) mm	Max working load N	Weight kg/m	Rubber	Material
11200102	C45	1873 TAB K325 GR	82,5	4500	4,354	Material: TPR Color: Red	LFD
11200105		1873 TAB K450 GR	114,3		4,945		
11200202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,354		
11200205		1873 NP TAB K450 GR	114,3		4,945		
11200302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,354		
11200305		1873 SS TAB K450 GR	114,3		4,945		
11320102	C45	1873 TAB K325 GR	82,5	4500	4,354	Material: TPR Color: Red	MX
11320105		1873 TAB K450 GR	114,3		4,945		
11320202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,354		
11320205		1873 NP TAB K450 GR	114,3		4,945		
11320302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,354		
11320305		1873 SS TAB K450 GR	114,3		4,945		
11210102	C45	1873 TAB K325 GR	82,5	4500	4,354	Material: EPDM-PP Color: Black	PP
11210105		1873 TAB K450 GR	114,3		4,945		
11210202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,354		
11210205		1873 NP TAB K450 GR	114,3		4,945		
11210302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,354		
11210305		1873 SS TAB K450 GR	114,3		4,945		
11330102	C45	1873 TAB K325 GR	82,5	4500	4,354	Material: TPR Color: Red	MWX
11330105		1873 TAB K450 GR	114,3		4,945		
11330202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,354		
11330205		1873 NP TAB K450 GR	114,3		4,945		
11330302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,354		
11330305		1873 SS TAB K450 GR	114,3		4,945		

1873 GRIPPER GS2



Catena curvilinea
Sideflexing chain / Kurvengängige Plattenbandkette

Delivery: **Easy** **Standard**

The stainless steel version is supplied with LONG-LIFE SS roller chain. | Backflex radius min.: 150 mm

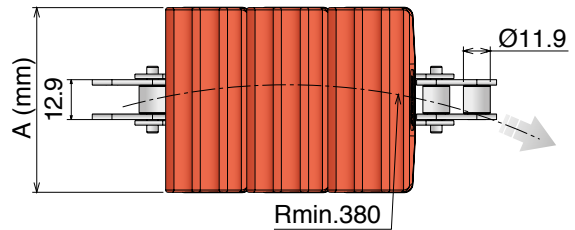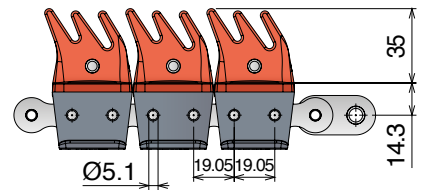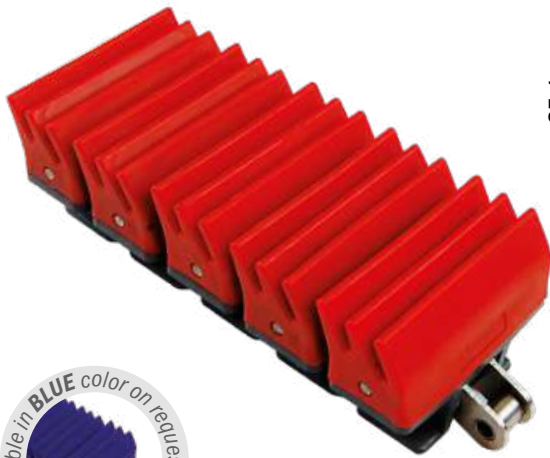

TAB SYSTEM



Standard lenght roller chain: 160 Pitches

Article-Nr.	Chain	Ref.	A (Width) mm	Max working load N	Weight kg/m	Rubber	Material
11280102	C45	1873 TAB K325 GR	82,5	4500	4,354	Material: TPR Color: Red	LFD
11280105		1873 TAB K450 GR	114,3		4,945		
11280202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,354		
11280205		1873 NP TAB K450 GR	114,3		4,945		
11280302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,354		
11280305		1873 SS TAB K450 GR	114,3		4,945		
11340102	C45	1873 TAB K325 GR	82,5	4500	4,354	Material: TPR Color: Red	MX
11340105		1873 TAB K450 GR	114,3		4,945		
11340202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,354		
11340205		1873 NP TAB K450 GR	114,3		4,945		
11340302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,354		
11340305		1873 SS TAB K450 GR	114,3		4,945		
11290102	C45	1873 TAB K325 GR	82,5	4500	4,354	Material: EPDM-PP Color: Black	PP
11290105		1873 TAB K450 GR	114,3		4,945		
11290202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,354		
11290205		1873 NP TAB K450 GR	114,3		4,945		
11290302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,354		
11290305		1873 SS TAB K450 GR	114,3		4,945		
11350102	C45	1873 TAB K325 GR	82,5	4500	4,354	Material: TPR Color: Red	MWX
11350105		1873 TAB K450 GR	114,3		4,945		
11350202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,354		
11350205		1873 NP TAB K450 GR	114,3		4,945		
11350302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,354		
11350305		1873 SS TAB K450 GR	114,3		4,945		

1873 GRIPPER GS4

Catene in plastica / Plastic chains / Kunststoffkette


1873 GRIPPER GS4

Catena curvilinea

Sideflexing chain / Kurvengängige Plattenbandkette



Delivery: **Easy** **Standard**

The stainless steel version is supplied with LONG-LIFE SS roller chain. | Backflex radius min.: 400 mm

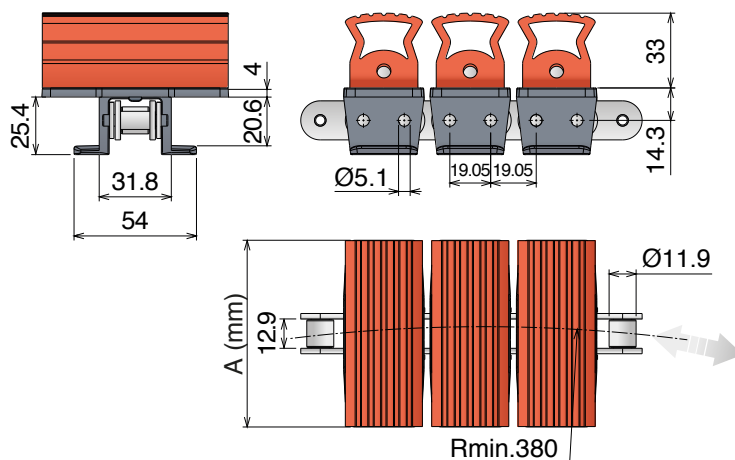

Standard lenght roller chain: 160 Pitches

TAB SYSTEM



Article-Nr.	Chain	Ref.	A (Width) mm	Max working load N	Weight kg/m	Rubber	Material
11830102	C45	1873 TAB K325 GR	82,5	4500	4,15	Material: TPR Color: Red	LFD
11830105		1873 TAB K450 GR	114,3		4,70		
11830202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,15		
11830205		1873 NP TAB K450 GR	114,3		4,70		
11830302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,15		
11830305		1873 SS TAB K450 GR	114,3		4,70		
11840102	C45	1873 TAB K325 GR	82,5	4500	4,15	Material: TPR Color: Red	MX
11840105		1873 TAB K450 GR	114,3		4,70		
11840202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,15		
11840205		1873 NP TAB K450 GR	114,3		4,70		
11840302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,15		
11840305		1873 SS TAB K450 GR	114,3		4,70		
11850102	C45	1873 TAB K325 GR	82,5	4500	4,15	Material: EPDM-PP Color: Black	PP
11850105		1873 TAB K450 GR	114,3		4,70		
11850202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,15		
11850205		1873 NP TAB K450 GR	114,3		4,70		
11850302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,15		
11850305		1873 SS TAB K450 GR	114,3		4,70		
11860102	C45	1873 TAB K325 GR	82,5	4500	4,15	Material: TPR Color: Red	MWX
11860105		1873 TAB K450 GR	114,3		4,70		
11860202	Nickel Plated Steel	1873 NP TAB K325 GR	82,5	4500	4,15		
11860205		1873 NP TAB K450 GR	114,3		4,70		
11860302	Stainless Steel	1873 SS TAB K325 GR	82,5	3500	4,15		
11860305		1873 SS TAB K450 GR	114,3		4,70		

The stainless steel version is supplied with LONG-LIFE SS roller chain. | Backflex radius min.: 200 mm



1873 MX1


Catene in plastica / Plastic chains / Kunststoffkette

1873 MX1

Catena curvilinea
Sideflexing chain / Kurvengängige Plattenbandkette



RANGE EXTENSION

The stainless steel version is supplied with LONG-LIFE SS roller chain. | TPE Rubber: 75 ShA | Backflex radius min.: 200 mm

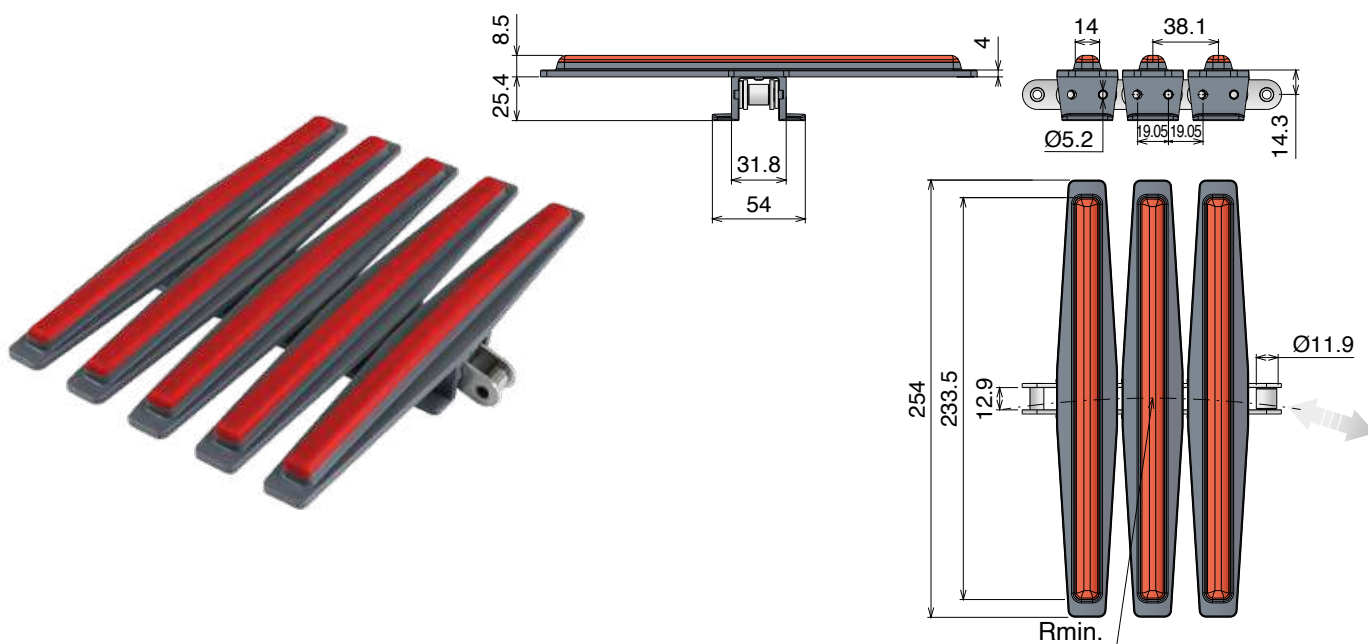

Standard lenght roller chain: 160 Pitches

TAB SYSTEM



Article-Nr.	Chain	Ref.	Plate Width mm	Weight kg/m	Max working load N	Sideflex radius min. mm	Material
11790108	C45	1873 LF TAB K1000	254,0	2,80	4500	457	LF
11780108	Nickel Plated Steel				4500		
11690108	Stainless Steel				3500		
11790308	C45	1873 MX TAB K1000	254,0	2,80	4500	457	MX
11780308	Nickel Plated Steel				4500		
11690308	Stainless Steel				3500		

1873 MX1

Chain for hot-fill applications, neck & cap sterilizing.

Care

Designed to keep the products in the correct position during the twist movement.

Temperature resistance

The rubber is developed for and perfectly resistant against the higher temperatures of the hot-filled products.

Long life roller chain

Special hardened pins and bushing guarantee a longer lifetime. Chain can twist 90° in 1500 mm.

Product stability


The new developed design guarantees a perfect connection between rubber and plate.

1873 MX2

Catena curvilinea
Sideflexing chain / Kurvengängige Plattenbandkette



RANGE EXTENSION

The stainless steel version is supplied with LONG-LIFE SS roller chain. | TPE Rubber: 75 ShA | Backflex radius min.: 200 mm

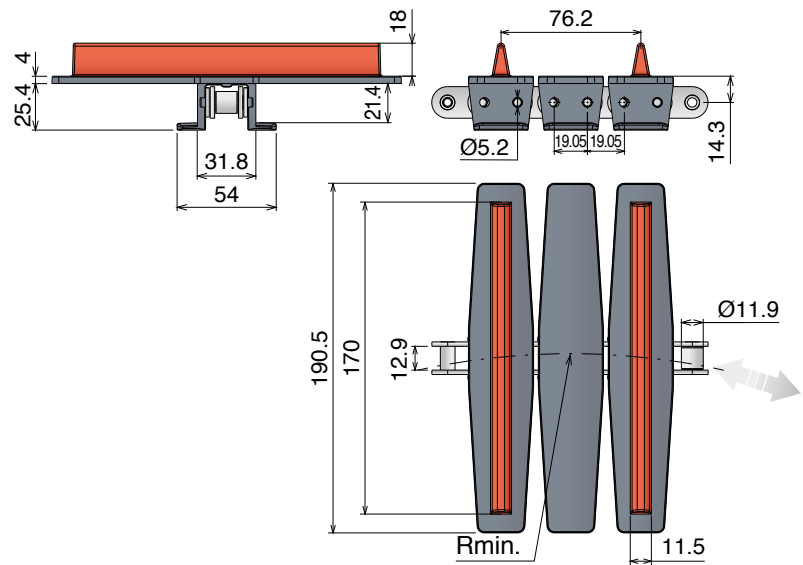

Standard length roller chain: 160 Pitches

TAB SYSTEM



Article-Nr.	Chain	Ref.	Plate Width mm	Weight kg/m	Max working load N	Sideflex radius min. mm	Material
11770107	C45	1873 LF TAB K750	190,5	2,60	4500	457	LF
11760107	Nickel Plated Steel				4500		
11670107	Stainless Steel				3500		
11770307	C45	1873 MX TAB K750	190,5	2,60	4500	457	MX
11760307	Nickel Plated Steel				4500		
11670307	Stainless Steel				3500		

1873 MX2

Chain for twisting cans

Care

Designed to twist cans without pressure.

Temperature resistance

Materials are suitable for use at high temperatures.

Long life roller chain

Special hardened pins and bushing guarantee a longer lifetime. Chain can twist 90° in 1500 mm.

Product stability

The flights assure the position of the cans also at higher speed.



878 GRIPPER GS1/GS2/GS4

Catene in plastica / Plastic chains / Kunststoffkette


878 GRIPPER

Catena curvilinea

Sideflexing chain / Kurvengängige Scharnierbandkette


Delivery: **Easy** **Standard**

Backflex radius min. **GS1:** 100 mm - **GS2** 180 mm - **GS4** 380 mm

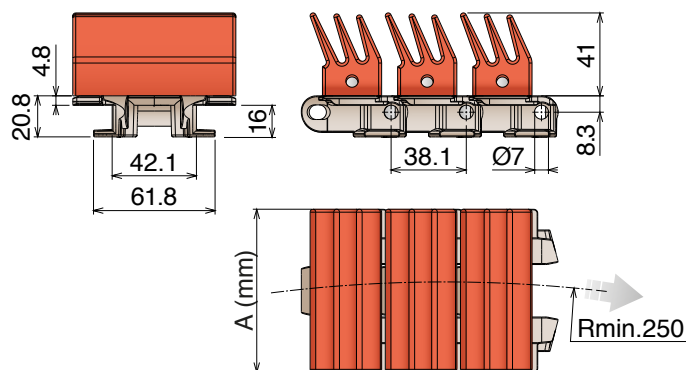


GS1

TAB SYSTEM




Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Rubber	Material
11800102	LF 878 GS1 K325	82,5	250	4,65	2200	TPR	LF

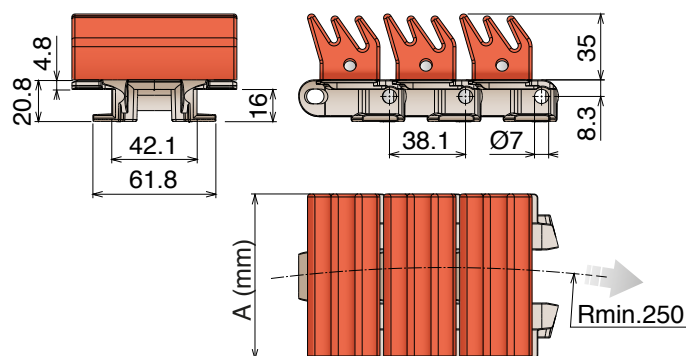


GS2

TAB SYSTEM




Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Rubber	Material
11810102	LF 878 GS2 K325	82,5	250	4,05	2200	TPR	LF

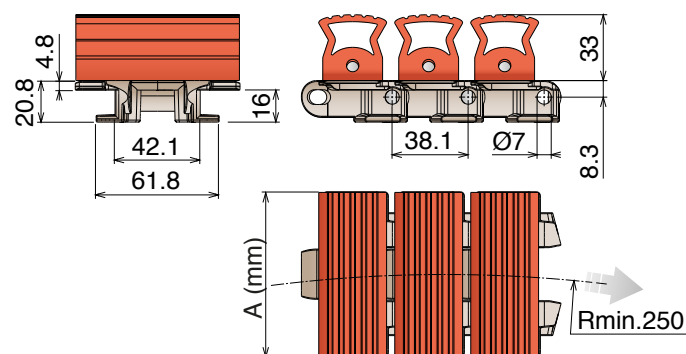

GS4

TAB SYSTEM






Article-Nr.	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Rubber	Material
11820102	LF 878 GS4 K325	82,5	250	4,10	2200	TPR	LF

1843


Catena curvilinea
Sideflexing chain / Kurvengängige Plattenbandkette

Delivery: **Easy** **Standard**

Backflex radius min.: 80 mm

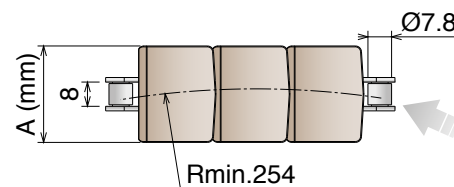

Standard length roller chain: 240 Pitches



TAB SYSTEM

Article-Nr.	Chain	Ref.	A (Plate Width) mm	R mm	Weight kg/m	Max working load N	Backflex radius min. mm	Material
11400117	C45	LF 1843 TAB K125	31,8	254	0,74	2700	50	LF
11410117	Stainless Steel		31,8	254	0,74	1900		
11400119	C45	LF 1843 TAB K200	50,8	254	0,89	2700		
11410119	Stainless Steel		50,8	254	0,89	1900		
11400317	C45	MX 1843 TAB K125	31,8	254	0,74	2700	50	MX
11410317	Stainless Steel		31,8	254	0,74	1900		
11400319	C45	MX 1843 TAB K200	50,8	254	0,89	2700		
11410319	Stainless Steel		50,8	254	0,89	1900		

SP 1883

Catena curvilinea
Sideflexing chain / Kurvengängige Plattenbandkette


Backflex radius min.: 350 mm

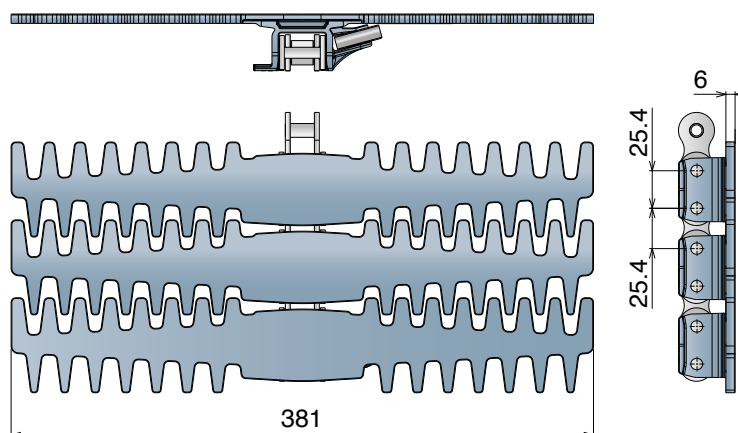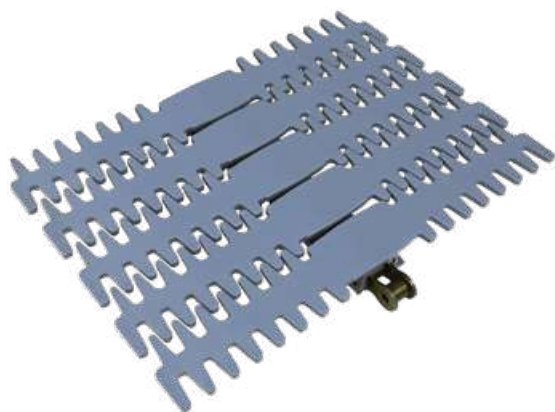

Standard lenght roller chain: 120 Pitches




SPROCKET
ASA 80
Standard on
market



Article-Nr.	Chain	Ref.	Plate Width mm	Weight kg/m	Max working load N	Sideflex radius min. mm	Material
11640110	C45	LFA SP 1883 TAB K1500	381,0	12,5	6500	711	LFA



Max Speed High Performance

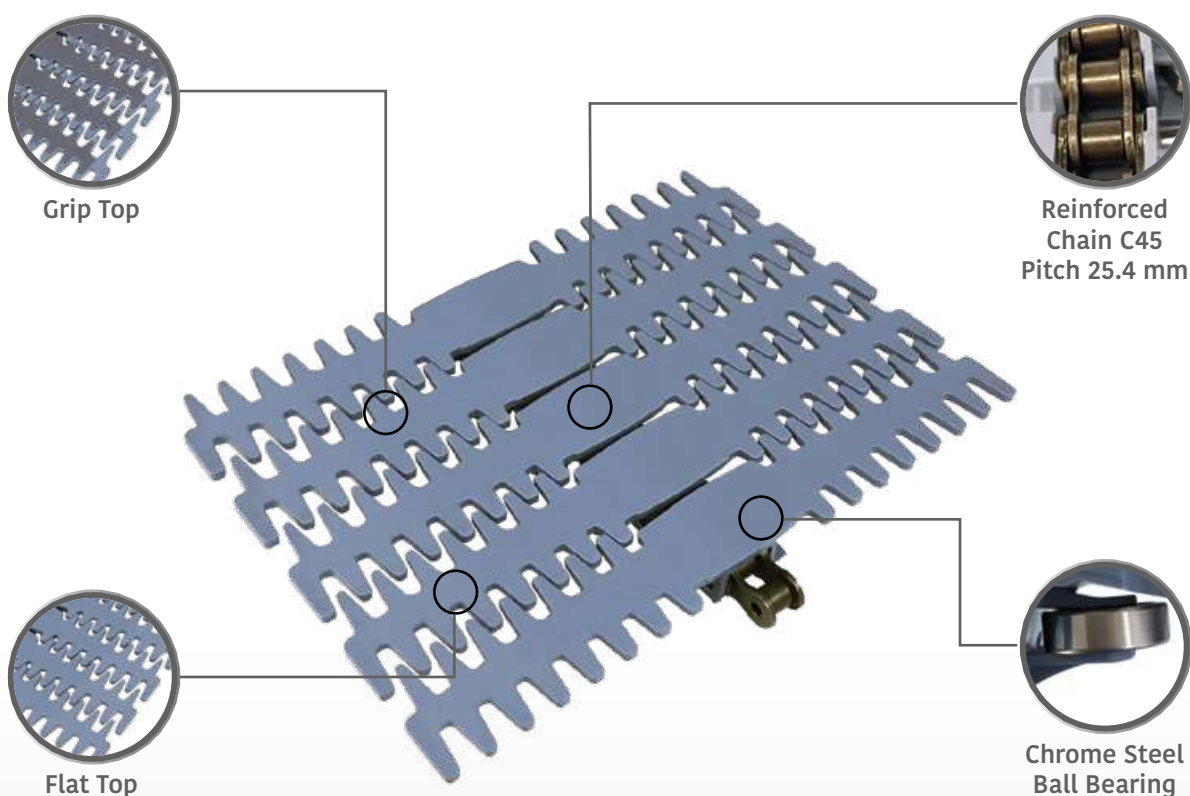


SP 1883 GT

Catena curvilinea
Sideflexing chain / Kurvengängige Plattenbandkette

Backflex radius min.: 350 mm

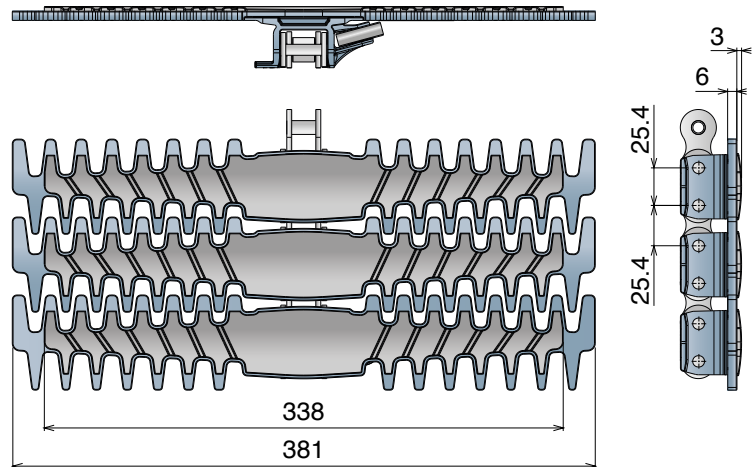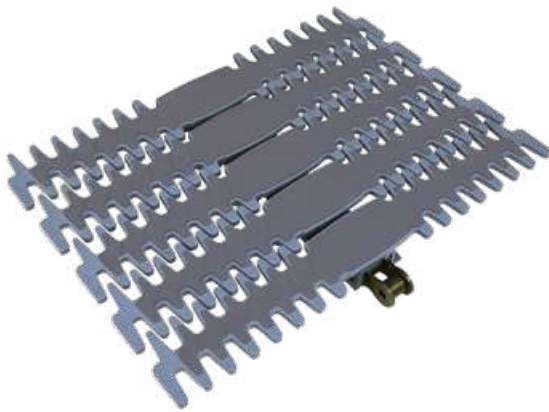

Standard length roller chain: 120 Pitches



Article-Nr.	Chain	Ref.	Plate Width mm	Weight kg/m	Max working load N	Sideflex radius min. mm	Material
11650110	C45	LFA SP 1883 GT TAB K1500	381,0	13,0	6500	711	LFA



CC 600-CC 600 TAB


Catene in plastica / Plastic chains / Kunststoffkette

CC 600

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

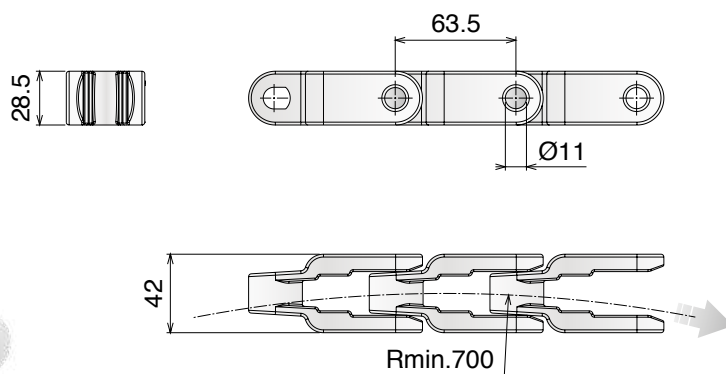

 10 feet 3.048 m	 pg. 97	 pg. 651>661
48 links		



Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11220400	CC 600	42	1,35	4000	LFN
11220300	CC 600	42	1,35	3200	MX

CC 600 TAB

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

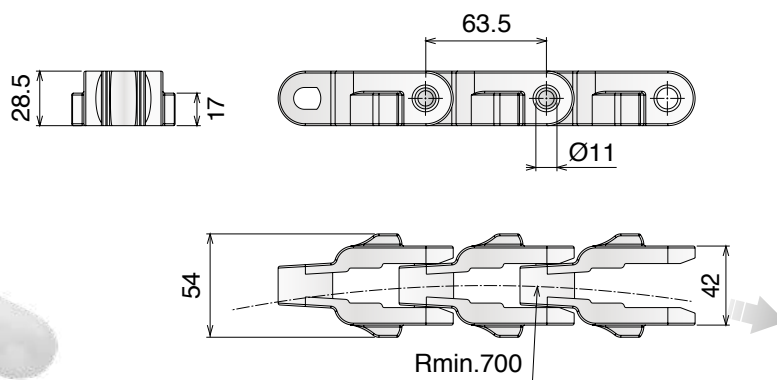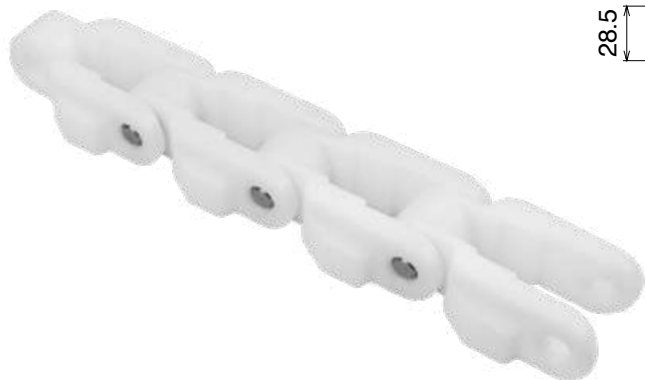

TAB SYSTEM

 10 feet 3.048 m	 pg. 97	 pg. 651>661
48 links		





Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11230400	CC 600 TAB	42	1,45	4000	LFN
11230300	CC 600 TAB	42	1,45	3200	MX

CC 600 D

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

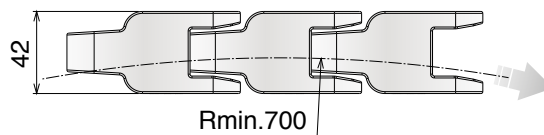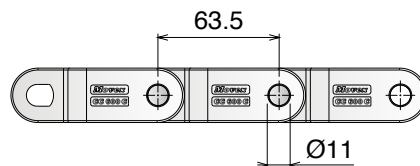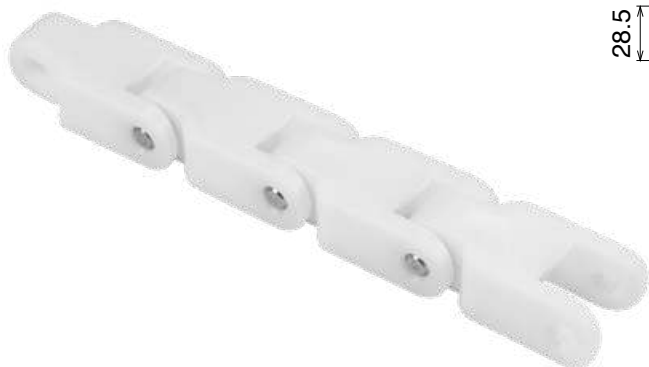

48 links



pg. 97



pg. 651>661




Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11220410	CC 600 D	42	1,40	4000	LFN
11220310	CC 600 D	42	1,40	3200	MX

CC 600 D TAB

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

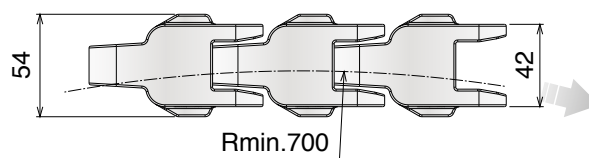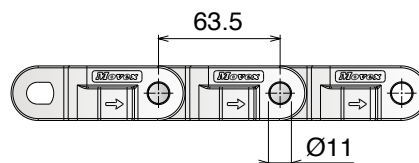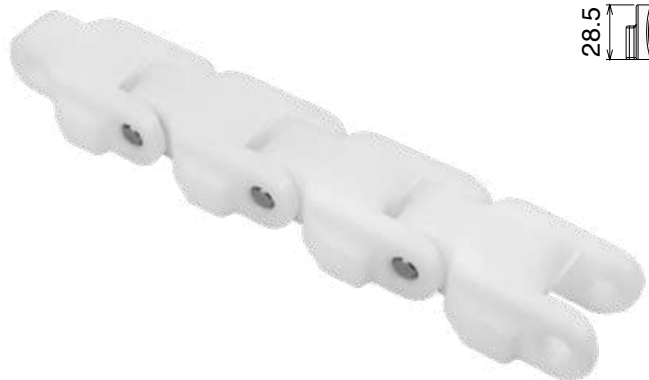

TAB SYSTEM



48 links



pg. 97



pg. 651>661

Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11230410	CC 600 D TAB	42	1,55	4000	LFN
11230310	CC 600 D TAB	42	1,55	3200	MX



CC 1400-CC 1400 TAB

Catene in plastica / Plastic chains / Kunststoffkette

CC 1400

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Pins: Stainless Steel | Backflex radius min.: 50 mm

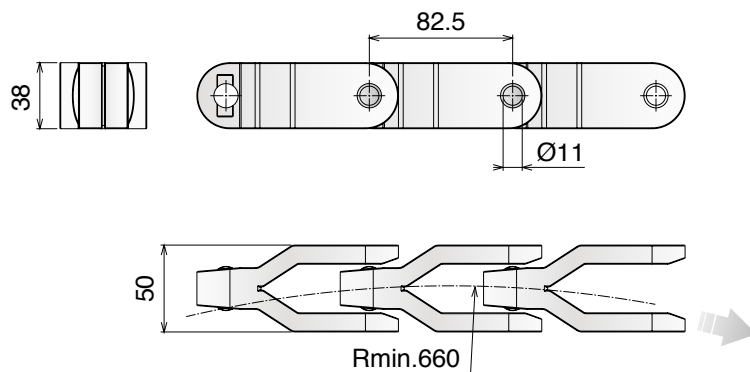


Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11300400	CC 1400	50	3,24	6500	LFN
11300300	CC 1400	50	3,24	5200	MX


CC 1400 TAB

Catena curvilinea
Sideflexing chain / Kurvengängige Scharnierbandkette

Pins: Stainless Steel | Backflex radius min.: 50 mm

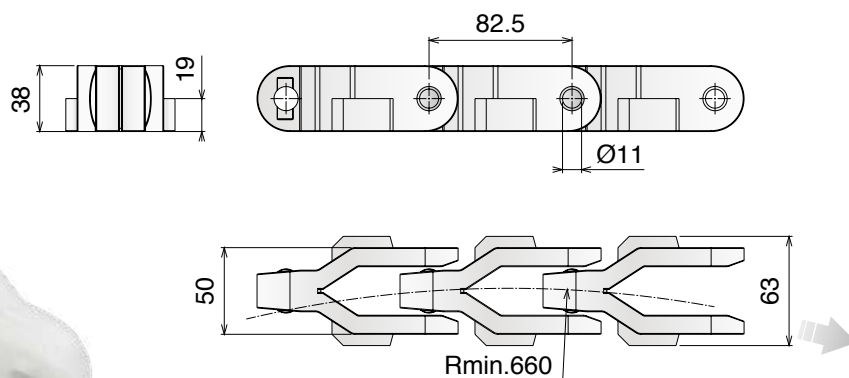

TAB SYSTEM




Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11310400	CC 1400 TAB	50	3,24	6500	LFN
11310300	CC 1400 TAB	50	3,24	5200	MX

1701 TAB OP

Catena curvilinea
Sideflexing chain / Kardankette

Pins: Stainless Steel | Backflex radius min.: 50 mm

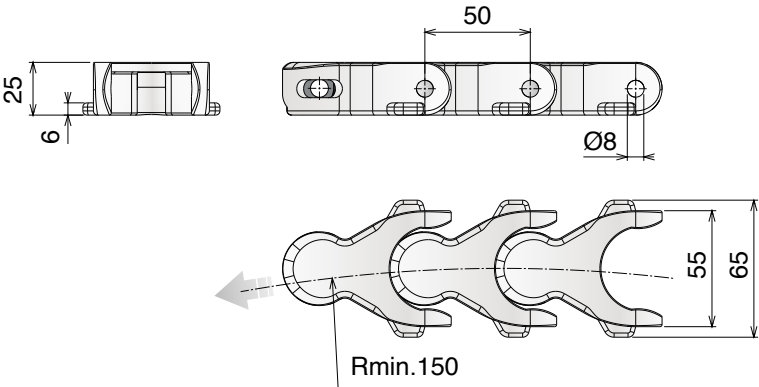

TAB SYSTEM


 10 feet 3.050 m	 pg. 98	 pg. 104	 pg. 169/177	 pg. 651>661
61 links				

Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11360400	LF 1701 TAB OP	55	1,40	2700	LFN


1701 TAB OPF

Catena curvilinea
Sideflexing chain / Kardankette


Pins: Stainless Steel | Backflex radius min. Type A/B/C: 100 mm | Backflex radius min. Type D: 120 mm

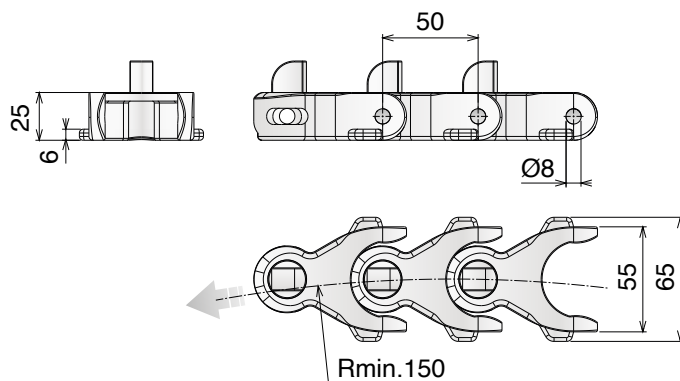


Type A

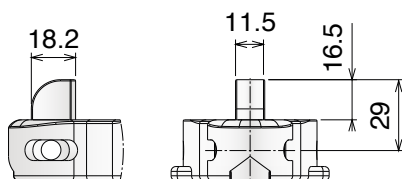


Type B

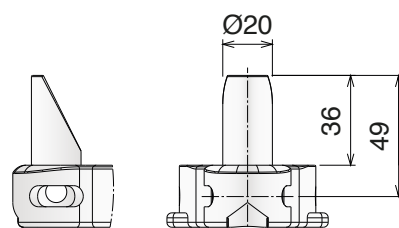

Type C



Type D

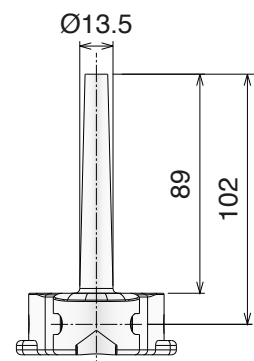

TAB SYSTEM



61 links



pg. 98



pg. 104



pg. 169/177




pg. 651>661

Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11360400-FA	1701 TAB Type A	55	1,60	2700	LFN
11360400-FB	1701 TAB Type B	55	1,60		
11360400-FC	1701 TAB Type C	55	2,00		
11360400-FD	1701 TAB Type D	55	2,30		

1706

Catena curvilinea
Sideflexing chain / Kardankette

Pins: Stainless Steel | Backflex radius min.: 80 mm

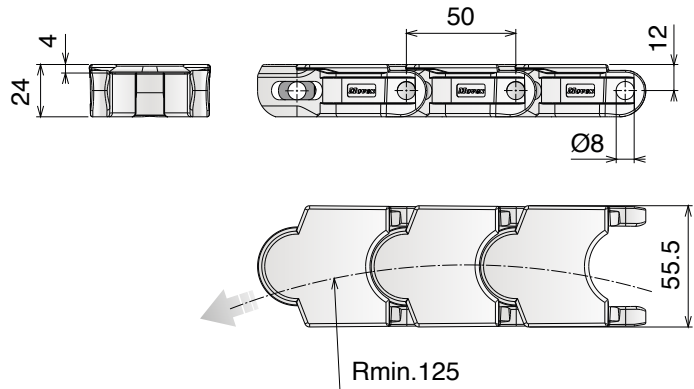


 10 feet 3.050 m				
61 links	pg. 98	pg. 105	pg. 169/177	pg. 651>661

Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11720400	LF 1706	55,5	1,35	2300	LFN
11720300	MX 1706	55,5	1,35	1900	MX

1706 TAB

Catena curvilinea
Sideflexing chain / Kardankette

Pins: Stainless Steel | Backflex radius min.: 80 mm

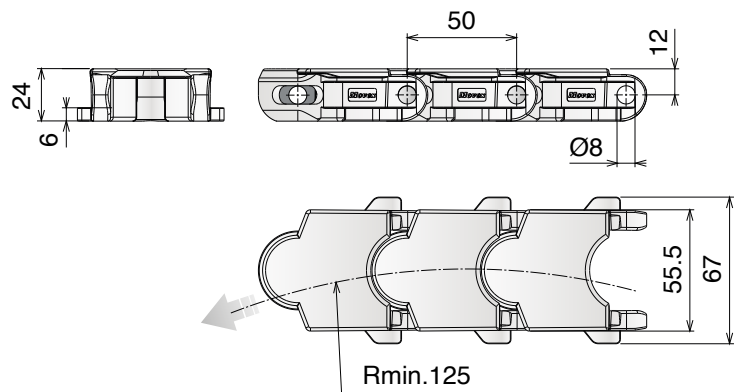

TAB SYSTEM

 10 feet 3.050 m				
61 links	pg. 98	pg. 105	pg. 169/177	pg. 651>661

Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Material
11730400	LF 1706 TAB	55,5	1,38	2300	LFN
11730300	MX 1706 TAB	55,5	1,38	1900	MX

765 NO GAP

Catene in plastica / Plastic chains / Kunststoffkette


765 NO GAP

Catena curvilinea
Sideflexing chain / Kardankette

UPDATED MATERIALS

Delivery: **Easy** **Standard**

Pins: Stainless Steel | Backflex radius min.: 50 mm

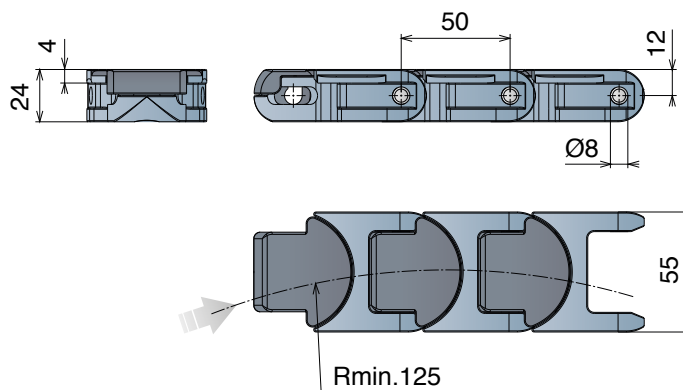

10 feet
3.050 m
61 links

pg. 98

pg. 105

pg. 651>661

Article-Nr.	Ref.	Plate Width mm	Weight kg/m	Max working load N	Frame Material	Plate Material
11940100	765 LFA NO GAP	55	1,46	2670	LFA	MX
11940300	765 MX NO GAP	55	1,46	2200	MX	MK



Advantages:

- Improved safety
- Product stability
- Ideal to transport small products


43 MF-63 MF-83 MF-103 MF

Catena curvilinea
Sideflexing chain / Kardankette


Pins: Stainless Steel | Backflex radius min.: 80 mm



43 MF

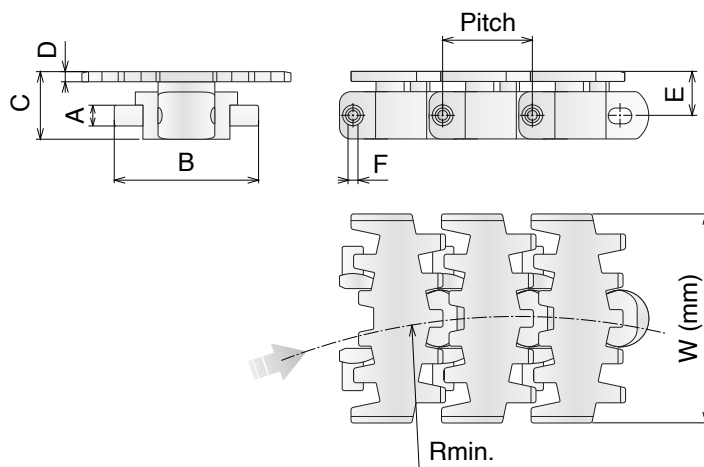

63 MF

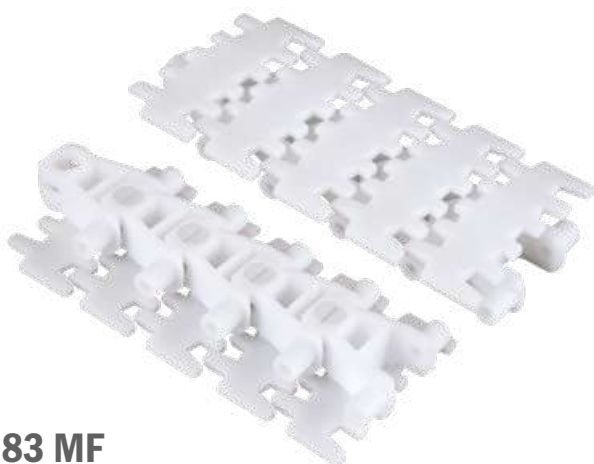


83 MF




103 MF



pg. 99-100



pg. 105



pg. 651>661

Article-Nr.	Ref.	W (Plate Width) mm	A mm	B mm	C mm	D mm	E mm	F mm	Weight kg/m	Pitch	Radius min.	Links	Max working load N	Material
12010400	43 MF	43	8,25	35	22	3	13,25	4	0,60	25,4	140	3.048 (120 links)	2100	LFN
12010401	63 MF	63	8,25	35	22,5	3,5	13,75	4	0,80	25,4	150	3.048 (120 links)		
12010402	83 MF	83	11	58	27	4	17	6	1,70	33,5	160	3.015 (90 links)		
12010403	103 MF	103	12	75	26	4,5	17,5	6	2,00	35,5	170	3.195 (90 links)		

83 M-140 M

Catene in plastica / Plastic chains / Kunststoffkette




83 M-140 M

Catena curvilinea
Sideflexing chain / Kardankette



Pins: Stainless Steel | Backflex radius min.: 150 mm



83 M

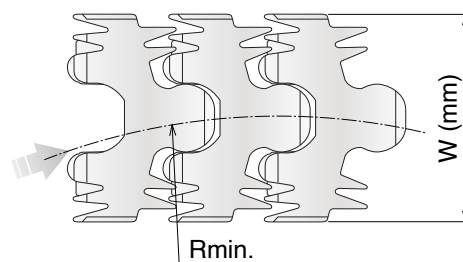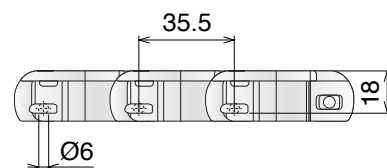

140 M




Article-Nr.	Ref.	W (Plate Width) mm	B mm	Weight kg/m	Pitch	Radius min.	Max working load N	Material
12020402	83 M	83	63	1,35	35,5	150	2100	LFN
12020404	140 M	140	63	2,10	35,5	250		



For bore tolerance refers to Movex engineering manual
available on our website.



Chain sprockets

815  Pag 78	815  Pag 78	815  Pag 79	815  Pag 79	881  Pag 80	881  Pag 80
881  Pag 81	881  Pag 81	805-821  Pag 82	805-821  Pag 82	8157  Pag 83	8157  Pag 83
820  Pag 84	820  Pag 84	820  Pag 85	820  Pag 85	831  Pag 86	831  Pag 86
831  Pag 87	831  Pag 87	880  Pag 88	880  Pag 88	880  Pag 89	880  Pag 89
882  Pag 90	882  Pag 90	882  Pag 91	882  Pag 91	512  Pag 92	512  Pag 92
815  Pag 93	8157  Pag 93	805  Pag 94	820  Pag 94	512  Pag 95	815 MINI  Pag 96
815 MINI  Pag 96	CC 600  Pag 97	CC 1400  Pag 97	1701-1706-765  Pag 98	1701-1706-765  Pag 98	43 MF-63 MF  Pag 99
103 MF  Pag 99	83 MF  Pag 100	83 MF  Pag 100	83 M-140 M  Pag 101	83 M-140 M  Pag 101	TURNING DISKS  Pag 102

Material
Info:




pg. 666

815

Ruota traino divisa, fresata


Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst

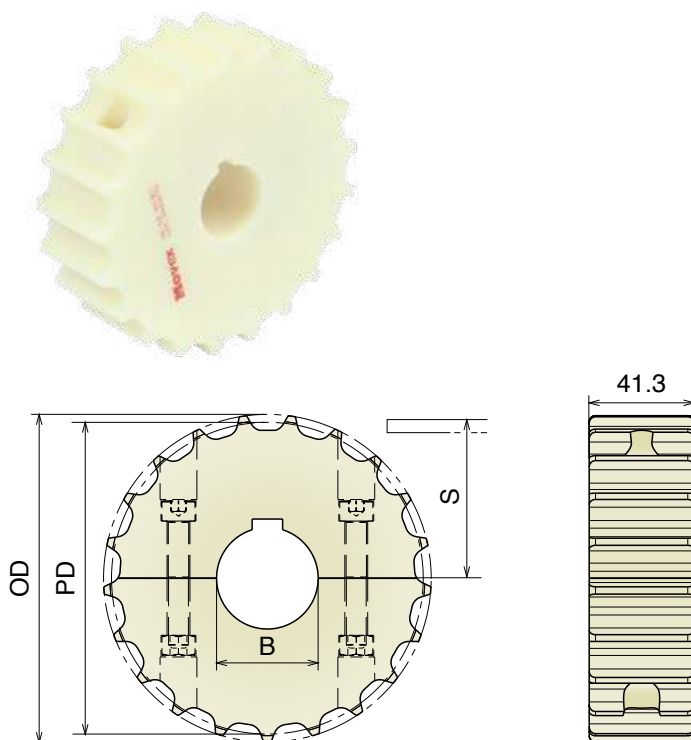Delivery: **Easy** **Standard** Also suitable for Series 881 M

Part	Article-Nr.	Z	Bore	PD	OD	S
501	50101	17	25	105,5	103,9	55,9
501	50102		30			
501	50103		35			
501	50104		40			
502	50201	19	25	117,3	117,0	61,9
502	50202		30			
502	50203		35			
502	50204		40			
503	50301	21	25	129,3	129,0	67,8
503	50302		30			
503	50303		35			
503	50304		40			
504	50401	23	25	141,2	142,0	73,8
504	50402		30			
504	50403		35			
504	50404		40			
505	50501	25	25	153,2	154,0	79,8
505	50502		30			
505	50503		35			
505	50504		40			
506	50601	27	25	165,2	166,8	85,8
506	50602		30			
506	50603		35			
506	50604		40			
507	50701	29	25	177,2	178,5	91,8
507	50702		30			
507	50703		35			
507	50704		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

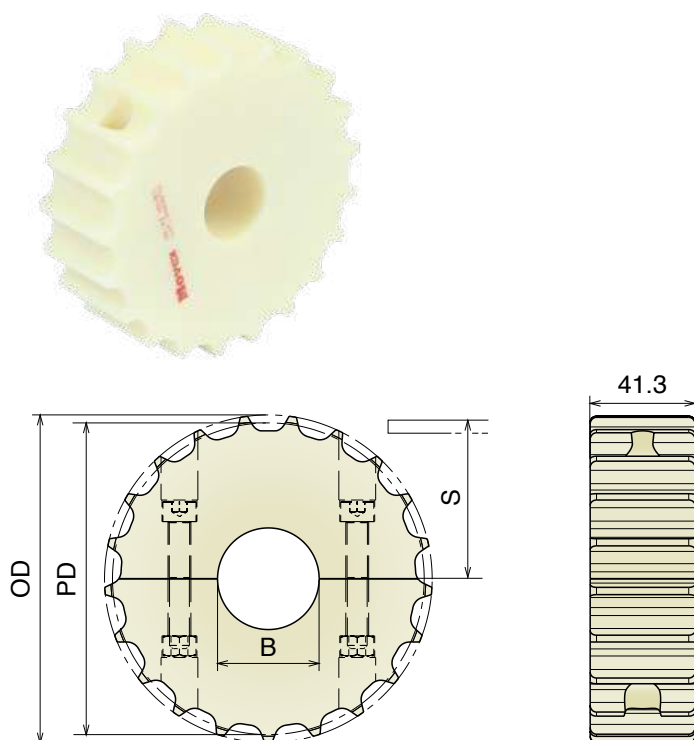

Part	Article-Nr.	Z	Bore	PD	OD	S
501	50150	17	18*	105,5	103,9	55,9
501	50151		25			
501	50152		30			
501	50153		35			
501	50154		40			
502	50250	19	18*	117,3	117,0	61,9
502	50251		25			
502	50252		30			
502	50253		35			
502	50254		40			
503	50350	21	18*	129,3	129,0	67,8
503	50351		25			
503	50352		30			
503	50353		35			
503	50354		40			
504	50450	23	18*	141,2	142,0	73,8
504	50451		25			
504	50452		30			
504	50453		35			
504	50454		40			
505	50550	25	18*	153,2	154,0	79,8
505	50551		25			
505	50552		30			
505	50553		35			
505	50554		40			
506	50650	27	18*	165,2	166,8	85,8
506	50651		25			
506	50652		30			
506	50653		35			
506	50654		40			
507	50750	29	18*	177,2	178,5	91,8
507	50751		25			
507	50752		30			
507	50753		35			
507	50754		40			

*Plain Bore


815

Ruota traino divisa, stampata

Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Delivery: **Easy** **Standard** Also suitable for Series 881 M


Part	Article-Nr.	Z-	Bore	PD	OD	S
508	50801	21	25	129,3	129,0	67,8
508	50802		30			
508	50803		35			
508	50804		40			
509	50901	23	25	141,2	142,0	73,8
509	50902		30			
509	50903		35			
509	50904		40			
510	51001	25	25	153,2	154,0	79,8
510	51002		30			
510	51003		35			
510	51004		40			

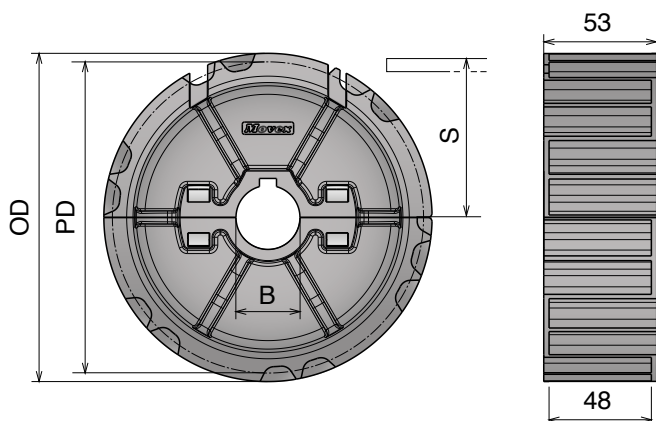

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

Part	Article-Nr.	Z-	Bore	PD	OD	S
508	50851	21	25	129,3	129,0	67,8
508	50852		30			
508	50853		35			
508	50854		40			
509	50951	23	25	141,2	142,0	73,8
509	50952		30			
509	50953		35			
509	50954		40			
510	51051	25	25	153,2	154,0	79,8
510	51052		30			
510	51053		35			
510	51054		40			

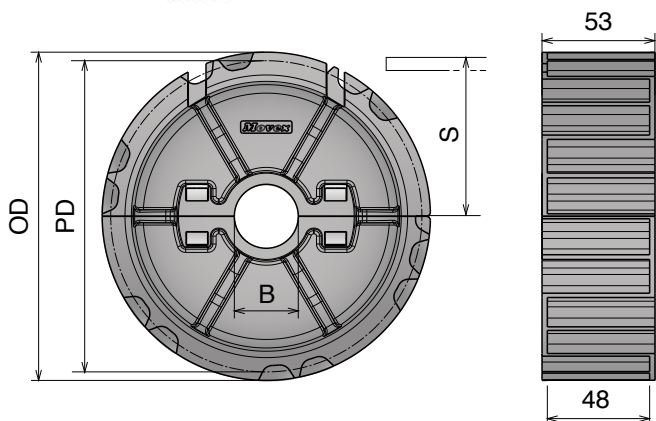


881

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst


Also suitable for Series 881 M, 881 B and 881 TAB

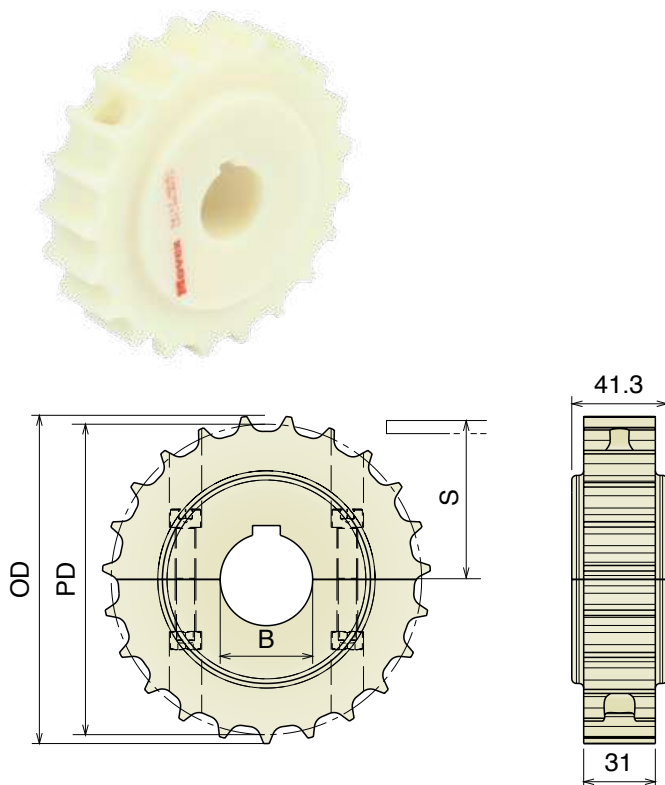

Part	Article-Nr.	Z	Bore	PD	OD	S
511	51101	17	25	105,5	103,9	55,9
511	51102		30			
511	51103		35			
511	51104		40			
512	51201	19	25	117,3	117,0	61,9
512	51202		30			
512	51203		35			
512	51204		40			
513	51301	21	25	129,3	129,0	67,8
513	51302		30			
513	51303		35			
513	51304		40			
514	51401	23	25	141,2	142,0	73,8
514	51402		30			
514	51403		35			
514	51404		40			
515	51501	25	25	153,2	154,0	79,8
515	51502		30			
515	51503		35			
515	51504		40			
516	51601	27	25	165,2	166,8	85,8
516	51602		30			
516	51603		35			
516	51604		40			
517	51701	29	25	177,2	178,5	91,8
517	51702		30			
517	51703		35			
517	51704		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

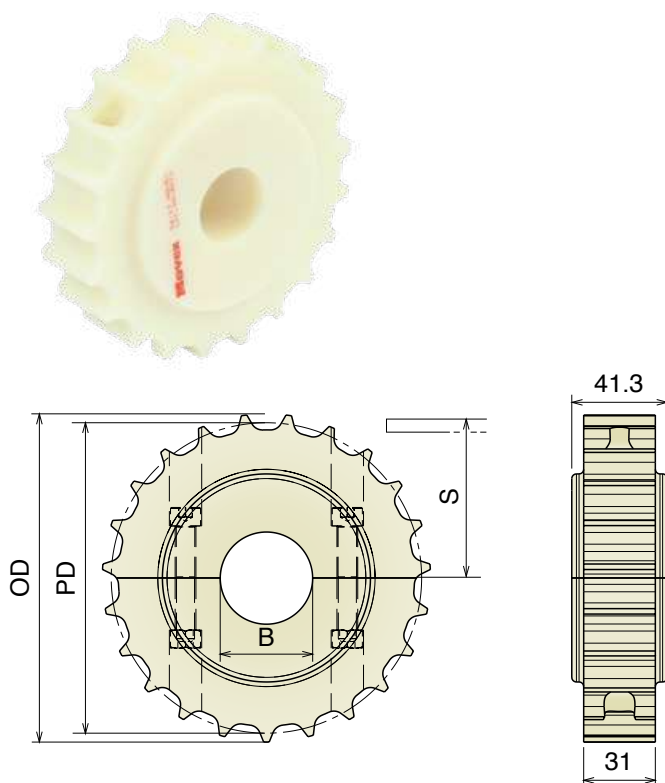

Part	Article-Nr.	Z	Bore	PD	OD	S
511	51150	17	18*	105,5	103,9	55,9
511	51151		25			
511	51152		30			
511	51153		35			
511	51154		40			
512	51250	19	18*	117,3	117,0	61,9
512	51251		25			
512	51252		30			
512	51253		35			
512	51254		40			
513	51350	21	18*	129,3	129,0	67,8
513	51351		25			
513	51352		30			
513	51353		35			
513	51354		40			
514	51450	23	18*	141,2	142,0	73,8
514	51451		25			
514	51452		30			
514	51453		35			
514	51454		40			
515	51550	25	18*	153,2	154,0	79,8
515	51551		25			
515	51552		30			
515	51553		35			
515	51554		40			
516	51650	27	18*	165,2	166,8	85,8
516	51651		25			
516	51652		30			
516	51653		35			
516	51654		40			
517	51750	29	18*	177,2	178,5	91,8
517	51751		25			
517	51752		30			
517	51753		35			
517	51754		40			

*Plain Bore



881

Ruota traino divisa, stampata

Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Delivery: **Easy** **Standard** Also suitable for Series 881 M, 881 B and 881 TAB



Part	Article-Nr.	Z-	Bore	PD	OD	S
518	51801	21	25	129,3	129,0	67,8
518	51802		30			
518	51803		35			
518	51804		40			
519	51901	23	25	141,2	142,0	73,8
519	51902		30			
519	51903		35			
519	51904		40			
520	52001	25	25	153,2	154,0	79,8
520	52002		30			
520	52003		35			
520	52004		40			

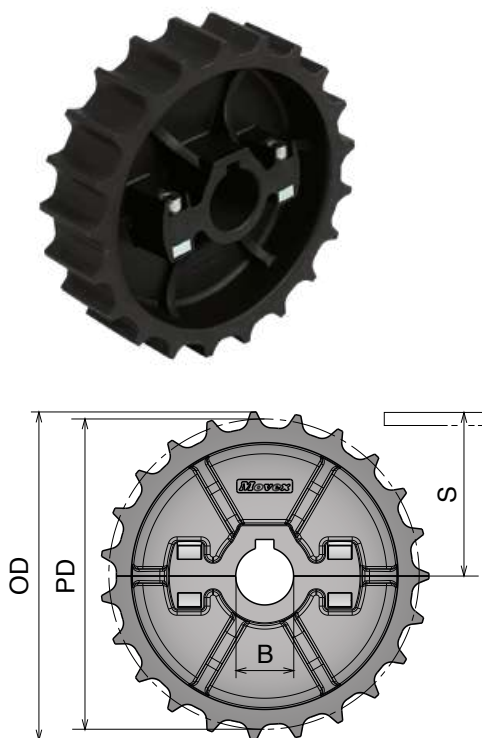

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

Part	Article-Nr.	Z-	Bore	PD	OD	S
518	51851	21	25	129,3	129,0	67,8
518	51852		30			
518	51853		35			
518	51854		40			
519	51951	23	25	141,2	142,0	73,8
519	51952		30			
519	51953		35			
519	51954		40			
520	52051	25	25	153,2	154,0	79,8
520	52052		30			
520	52053		35			
520	52054		40			

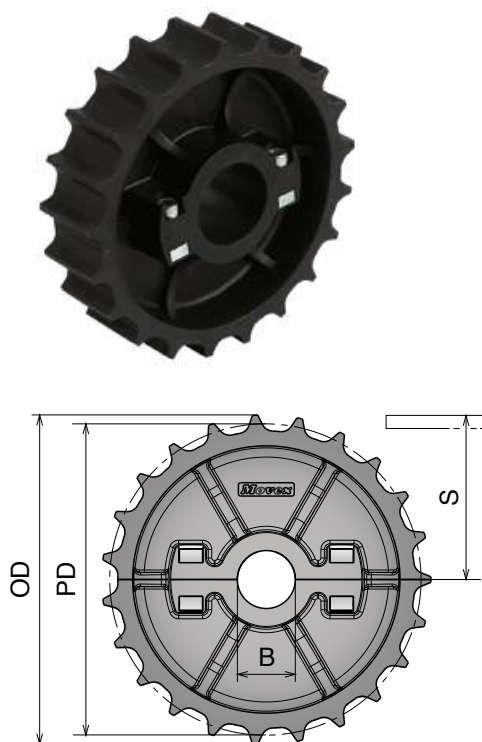


805-821

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst


Delivery: Easy Standard

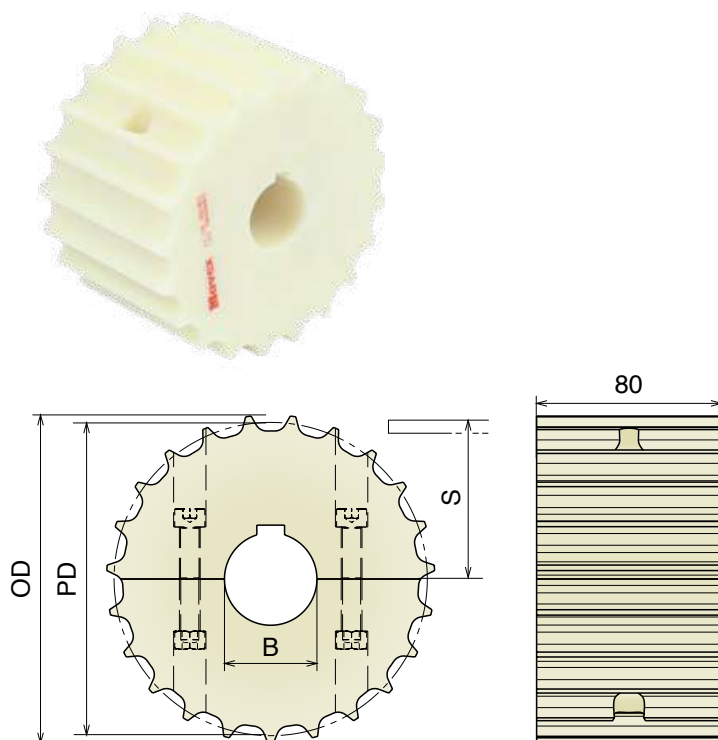

Part	Article-Nr.	Z-	Bore	PD	OD	S
521	52101	17	25	105,5	103,9	55,9
521	52102		30			
521	52103		35			
521	52104		40			
522	52201	19	25	117,3	117,0	61,9
522	52202		30			
522	52203		35			
522	52204		40			
523	52301	21	25	129,3	129,0	67,8
523	52302		30			
523	52303		35			
523	52304		40			
524	52401	23	25	141,2	142,0	73,8
524	52402		30			
524	52403		35			
524	52404		40			
525	52501	25	25	153,2	154,0	79,8
525	52502		30			
525	52503		35			
525	52504		40			
526	52601	27	25	165,2	166,8	85,8
526	52602		30			
526	52603		35			
526	52604		40			
527	52701	29	25	177,2	178,5	91,8
527	52702		30			
527	52703		35			
527	52704		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

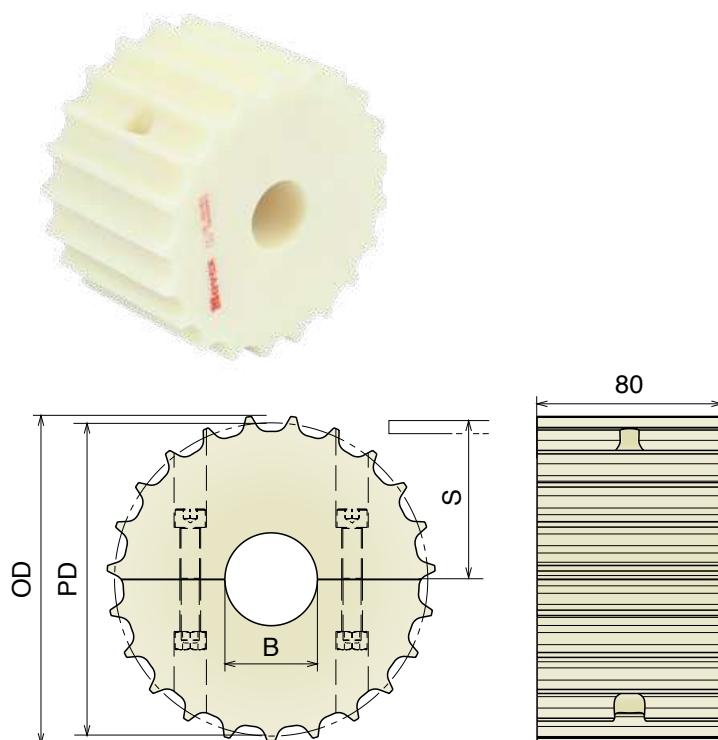

Part	Article-Nr.	Z-	Bore	PD	OD	S
521	52150	17	18*	105,5	103,9	55,9
521	52151		25			
521	52152		30			
521	52153		35			
521	52154		40			
522	52250	19	18*	117,3	117,0	61,9
522	52251		25			
522	52252		30			
522	52253		35			
522	52254		40			
523	52350	21	18*	129,3	129,0	67,8
523	52351		25			
523	52352		30			
523	52353		35			
523	52354		40			
524	52450	23	18*	141,2	142,0	73,8
524	52451		25			
524	52452		30			
524	52453		35			
524	52454		40			
525	52550	25	18*	153,2	154,0	79,8
525	52551		25			
525	52552		30			
525	52553		35			
525	52554		40			
526	52650	27	18*	165,2	166,8	85,8
526	52651		25			
526	52652		30			
526	52653		35			
526	52654		40			
527	52750	29	18*	177,2	178,5	91,8
527	52751		25			
527	52752		30			
527	52753		35			
527	52754		40			


*Plain Bore

8157

Ruota traino divisa, fresata


Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst

Delivery: **Easy** **Standard** Also suitable for Series 8857 M - 8857 M GT

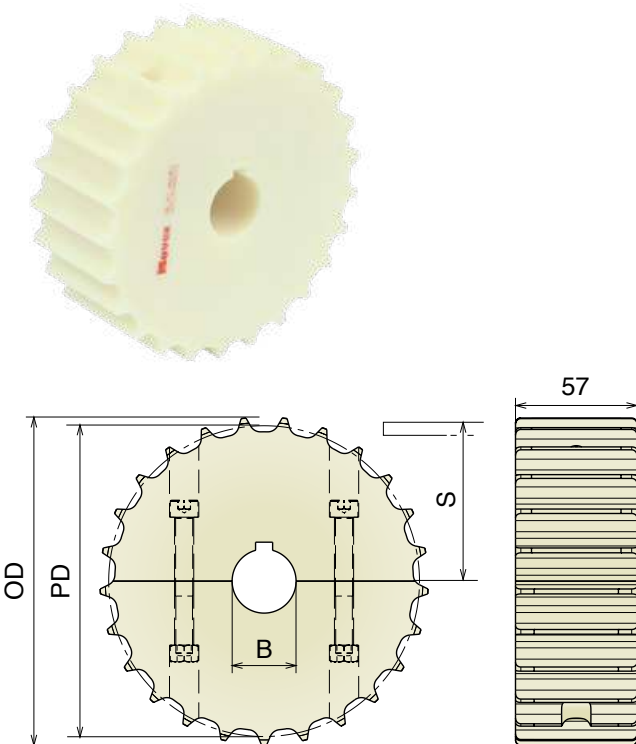

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

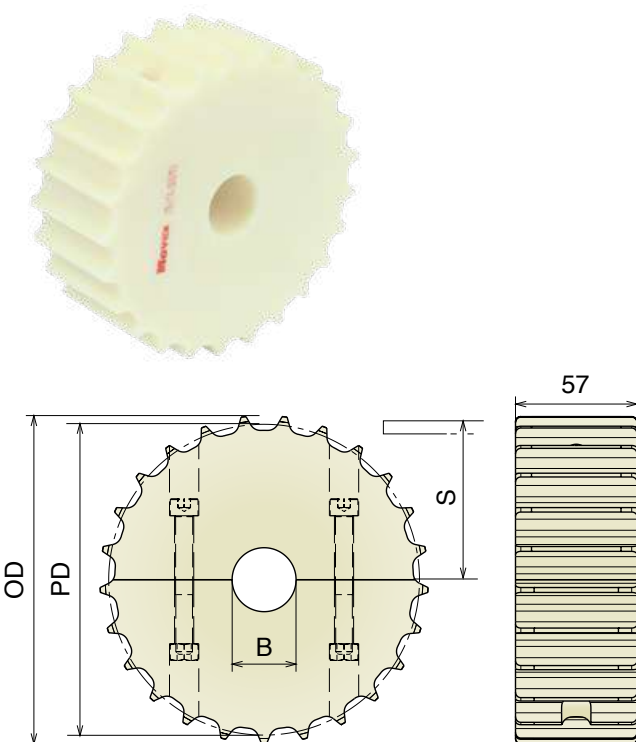

Part	Article-Nr.	Z-	Bore	PD	OD	S
528	52801	17	25	105,5	103,9	55,9
528	52802		30			
528	52803		35			
528	52804		40			
529	52901	19	25	117,3	117,0	61,9
529	52902		30			
529	52903		35			
529	52904		40			
530	53001	21	25	129,3	129,0	67,8
530	53002		30			
530	53003		35			
530	53004		40			
531	53101	23	25	141,2	142,0	73,8
531	53102		30			
531	53103		35			
531	53104		40			
532	53201	25	25	153,2	154,0	79,8
532	53202		30			
532	53203		35			
532	53204		40			
533	53301	27	25	165,2	166,8	85,8
533	53302		30			
533	53303		35			
533	53304		40			
534	53401	29	25	177,2	178,5	91,8
534	53402		30			
534	53403		35			
534	53404		40			

Part	Article-Nr.	Z-	Bore	PD	OD	S
528	52850	17	18*	105,5	103,9	55,9
528	52851		25			
528	52852		30			
528	52853		35			
528	52854		40			
529	52950	19	18*	117,3	117,0	61,9
529	52951		25			
529	52952		30			
529	52953		35			
529	52954		40			
530	53050	21	18*	129,3	129,0	67,8
530	53051		25			
530	53052		30			
530	53053		35			
530	53054		40			
531	53150	23	18*	141,2	142,0	73,8
531	53151		25			
531	53152		30			
531	53153		35			
531	53154		40			
532	53250	25	18*	153,2	154,0	79,8
532	53251		25			
532	53252		30			
532	53253		35			
532	53254		40			
533	53350	27	18*	165,2	166,8	85,8
533	53351		25			
533	53352		30			
533	53353		35			
533	53354		40			
534	53450	29	18*	177,2	178,5	91,8
534	53451		25			
534	53452		30			
534	53453		35			
534	53454		40			


*Plain Bore

820

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst


Delivery: Easy Standard

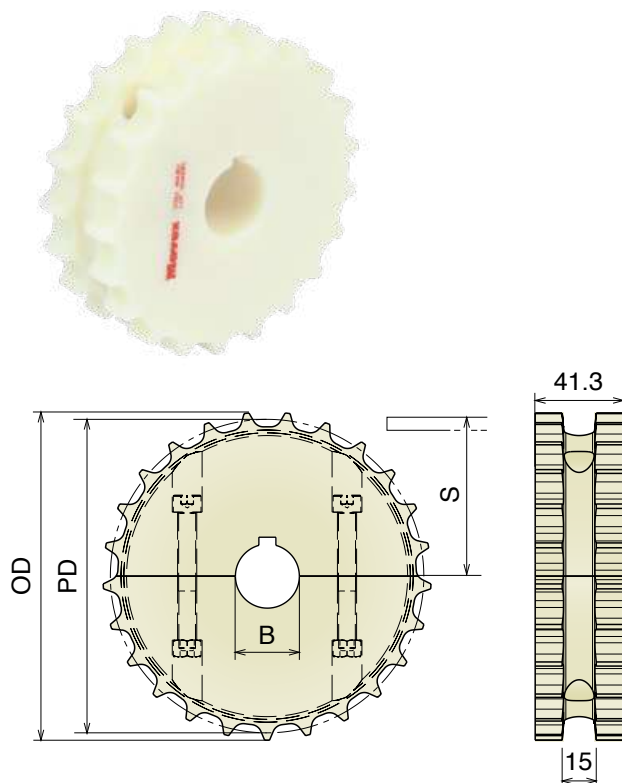

Part	Article-Nr.	Z	Bore	PD	OD	S
535	53501	17	25	105,5	103,9	55,9
535	53502		30			
535	53503		35			
535	53504		40			
536	53601	19	25	117,3	117,0	61,9
536	53602		30			
536	53603		35			
536	53604		40			
537	53701	21	25	129,3	129,0	67,8
537	53702		30			
537	53703		35			
537	53704		40			
538	53801	23	25	141,2	142,0	73,8
538	53802		30			
538	53803		35			
538	53804		40			
539	53901	25	25	153,2	154,0	79,8
539	53902		30			
539	53903		35			
539	53904		40			
540	54001	27	25	165,2	166,8	85,8
540	54002		30			
540	54003		35			
540	54004		40			
541	54101	29	25	177,2	178,5	91,8
541	54102		30			
541	54103		35			
541	54104		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

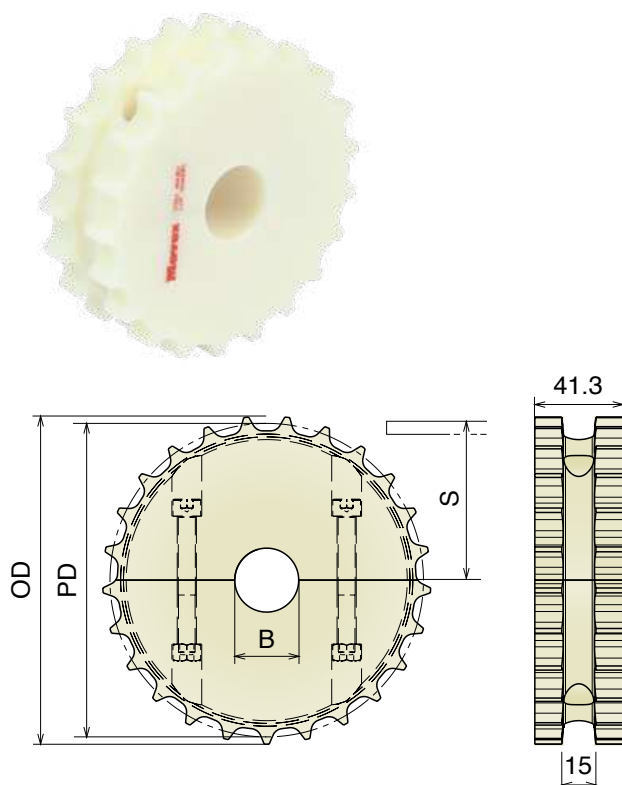

Part	Article-Nr.	Z	Bore	PD	OD	S
535	53550	17	18*	105,5	103,9	55,9
535	53551		25			
535	53552		30			
535	53553		35			
535	53554		40			
536	53650	19	18*	117,3	117,0	61,9
536	53651		25			
536	53652		30			
536	53653		35			
536	53654		40			
537	53750	21	18*	129,3	129,0	67,8
537	53751		25			
537	53752		30			
537	53753		35			
537	53754		40			
538	53850	23	18*	141,2	142,0	73,8
538	53851		25			
538	53852		30			
538	53853		35			
538	53854		40			
539	53950	25	18*	153,2	154,0	79,8
539	53951		25			
539	53952		30			
539	53953		35			
539	53954		40			
540	54050	27	18*	165,2	166,8	85,8
540	54051		25			
540	54052		30			
540	54053		35			
540	54054		40			
541	54150	29	18*	177,2	178,5	91,8
541	54151		25			
541	54152		30			
541	54153		35			
541	54154		40			


*Plain Bore

820

Ruota traino divisa, stampata

Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt


Delivery: **Easy** **Standard**

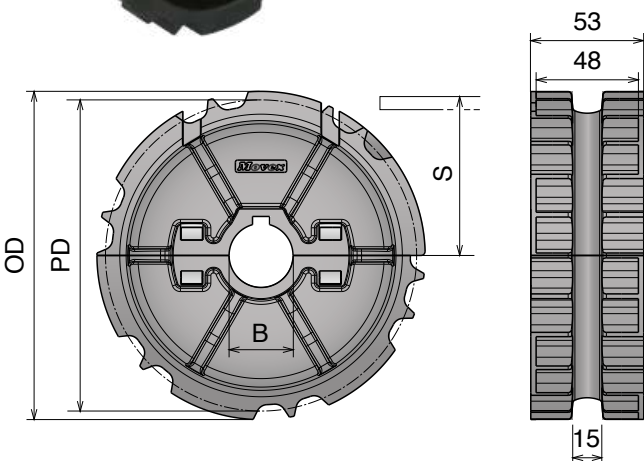

Part	Article-Nr.	Z-	Bore	PD	OD	S
542	54201	21	25	129,3	129,0	67,8
542	54202		30			
542	54203		35			
542	54204		40			
543	54301	23	25	141,2	142,0	73,8
543	54302		30			
543	54303		35			
543	54304		40			
544	54401	25	25	153,2	154,0	79,8
544	54402		30			
544	54403		35			
544	54404		40			

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

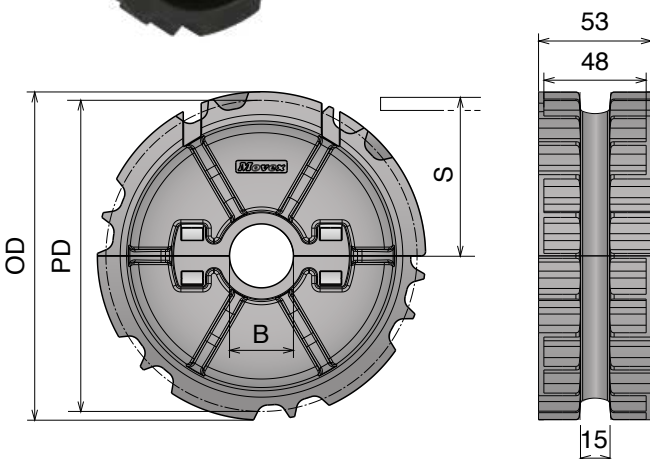


Part	Article-Nr.	Z-	Bore	PD	OD	S
542	54251	21	25	129,3	129,0	67,8
542	54252		30			
542	54253		35			
542	54254		40			
543	54351	23	25	141,2	142,0	73,8
543	54352		30			
543	54353		35			
543	54354		40			
544	54451	25	25	153,2	154,0	79,8
544	54452		30			
544	54453		35			
544	54454		40			

831

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst


Delivery: Easy Standard

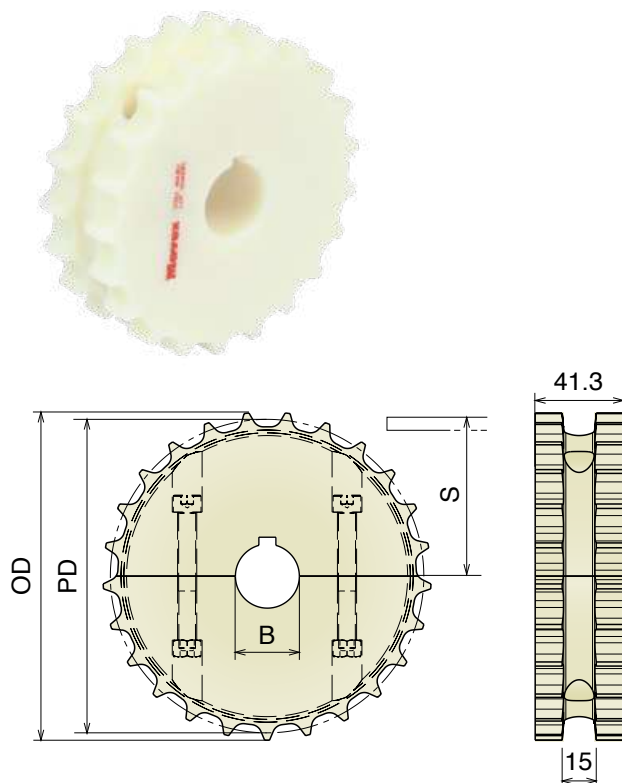

Part	Article-Nr.	Z	Bore	PD	OD	S
535	53501	17	25	105,5	103,9	55,1
535	53502		30			
535	53503		35			
535	53504		40			
536	53601	19	25	117,3	117,0	61,1
536	53602		30			
536	53603		35			
536	53604		40			
537	53701	21	25	129,3	129,0	67,0
537	53702		30			
537	53703		35			
537	53704		40			
538	53801	23	25	141,2	142,0	73,0
538	53802		30			
538	53803		35			
538	53804		40			
539	53901	25	25	153,2	154,0	79,0
539	53902		30			
539	53903		35			
539	53904		40			
540	54001	27	25	165,2	166,8	85,0
540	54002		30			
540	54003		35			
540	54004		40			
541	54101	29	25	177,2	178,5	91,0
541	54102		30			
541	54103		35			
541	54104		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

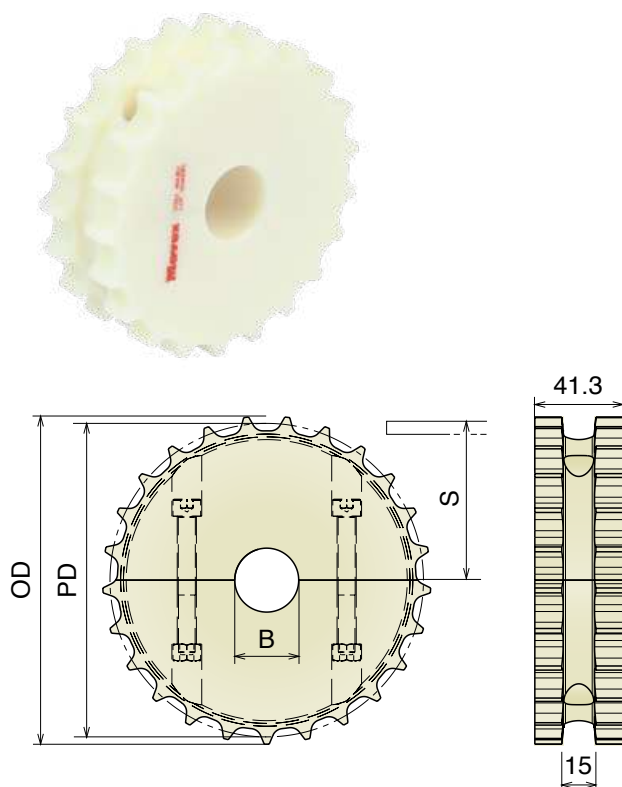


Part	Article-Nr.	Z	Bore	PD	OD	S
535	53550	17	18*	105,5	103,9	55,1
535	53551		25			
535	53552		30			
535	53553		35			
535	53554		40			
536	53650	19	18*	117,3	117,0	61,1
536	53651		25			
536	53652		30			
536	53653		35			
536	53654		40			
537	53750	21	18*	129,3	129,0	67,0
537	53751		25			
537	53752		30			
537	53753		35			
537	53754		40			
538	53850	23	18*	141,2	142,0	73,0
538	53851		25			
538	53852		30			
538	53853		35			
538	53854		40			
539	53950	25	18*	153,2	154,0	79,0
539	53951		25			
539	53952		30			
539	53953		35			
539	53954		40			
540	54050	27	18*	165,2	166,8	85,0
540	54051		25			
540	54052		30			
540	54053		35			
540	54054		40			
541	54150	29	18*	177,2	178,5	91,0
541	54151		25			
541	54152		30			
541	54153		35			
541	54154		40			

*Plain Bore

831

Ruota traino divisa, stampata


Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

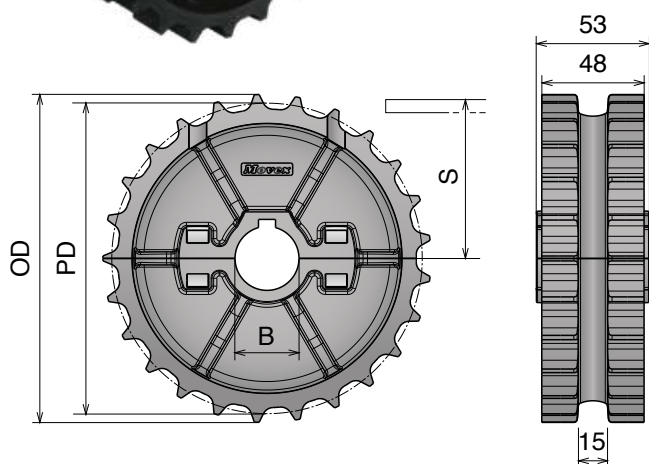

Part	Article-Nr.	Z-	Bore	PD	OD	S
542	54201-2L	21	25	129,3	129,0	67,0
542	54202-2L		30			
542	54203-2L		35			
542	54204-2L		40			
543	54301-2L	23	25	141,2	142,0	73,0
543	54302-2L		30			
543	54303-2L		35			
543	54304-2L		40			
544	54401-2L	25	25	153,2	154,0	79,0
544	54402-2L		30			
544	54403-2L		35			
544	54404-2L		40			

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

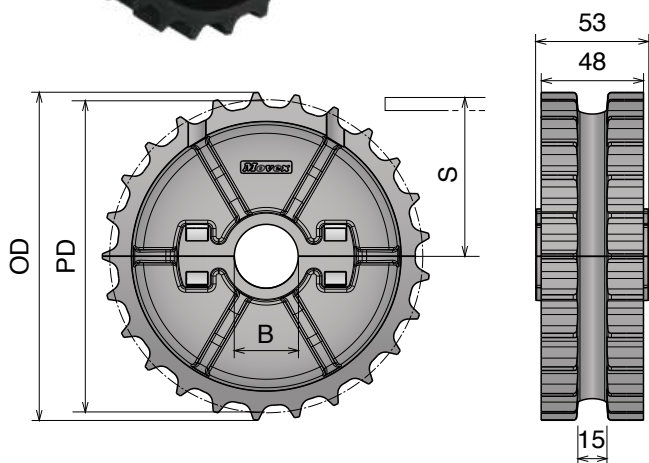


Part	Article-Nr.	Z-	Bore	PD	OD	S
542	54251-2L	21	25	129,3	129,0	67,0
542	54252-2L		30			
542	54253-2L		35			
542	54254-2L		40			
543	54351-2L	23	25	141,2	142,0	73,0
543	54352-2L		30			
543	54353-2L		35			
543	54354-2L		40			
544	54451-2L	25	25	153,2	154,0	79,0
544	54452-2L		30			
544	54453-2L		35			
544	54454-2L		40			

880

Ruota traino divisa, fresata


Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst

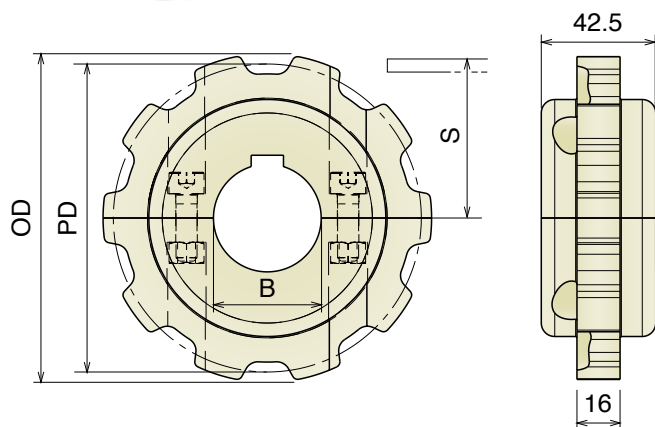Delivery: **Easy** **Standard** Used also for Series 828 - 878 TAB - 879 M - 879 TAB - 888 TAB - 888 TAB GT

Part	Article-Nr.	Z-	Bore	PD	OD	S
545	54501	9	25	111,4	110,0	59,3
545	54502		30			
545	54503		35			
545	54504		40			
546	54601	10	25	123,3	122,0	65,25
546	54602		30			
546	54603		35			
546	54604		40			
547	54701	11	25	135,2	135,0	71,2
547	54702		30			
547	54703		35			
547	54704		40			
548	54801	12	25	147,2	147,3	77,2
548	54802		30			
548	54803		35			
548	54804		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

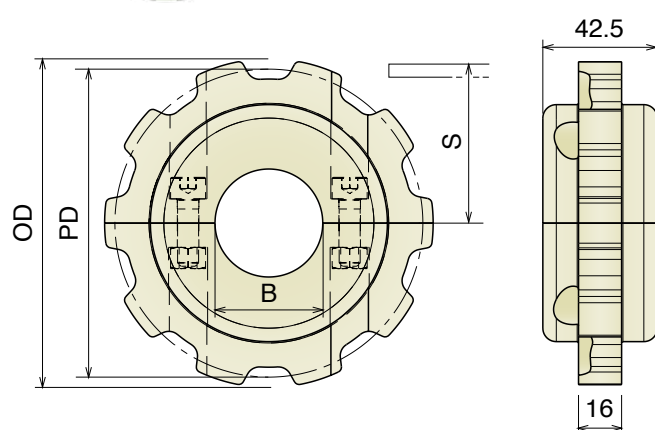

Part	Article-Nr.	Z-	Bore	PD	OD	S
545	54550	9	18*	111,4	110,0	59,3
545	54551		25			
545	54552		30			
545	54553		35			
545	54554		40			
546	54650	10	18*	123,3	122,0	65,25
546	54651		25			
546	54652		30			
546	54653		35			
546	54654		40			
547	54750	11	18*	135,2	135,0	71,2
547	54751		25			
547	54752		30			
547	54753		35			
547	54754		40			
548	54850	12	18*	147,2	147,3	77,2
548	54851		25			
548	54852		30			
548	54853		35			
548	54854		40			

*Plain Bore

Materiale / Material / Materialien:

Poliammide rinforzato/Polyamide reinforced/Verstärktes Polyamid
Viti: Acciaio inox/Screws: Stainless steel/Schrauben: Edelstahl
Dadi: Ottone nichelato/Nuts: Nickel plated brass/Mutter: Messing

880

Ruote dentate per catene / Chain sprockets / Kettenräder für Scharnierbandketten


880

Ruota traino divisa, stampata

Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Delivery: **Easy** **Standard** Used also for Series 828 - 878 TAB - 879 M - 879 TAB - 888 TAB - 888 TAB GT


Part	Article-Nr.	Z-	Bore	PD	OD	S
549	54901	10	25	123,3	122,0	65,25
549	54902		30			
549	54903		35			
549	54904		40			
550	55001	12	25	147,2	147,3	77,2
550	55002		30			
550	55003		35			
550	55004		40			

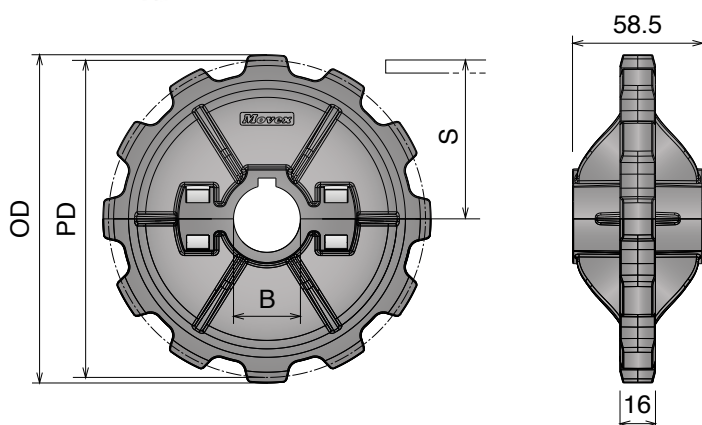

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt


Part	Article-Nr.	Z-	Bore	PD	OD	S
549	54951	10	25	123,3	122,0	65,25
549	54952		30			
549	54953		35			
549	54954		40			
550	55051	12	25	147,2	147,3	77,2
550	55052		30			
550	55053		35			
550	55054		40			

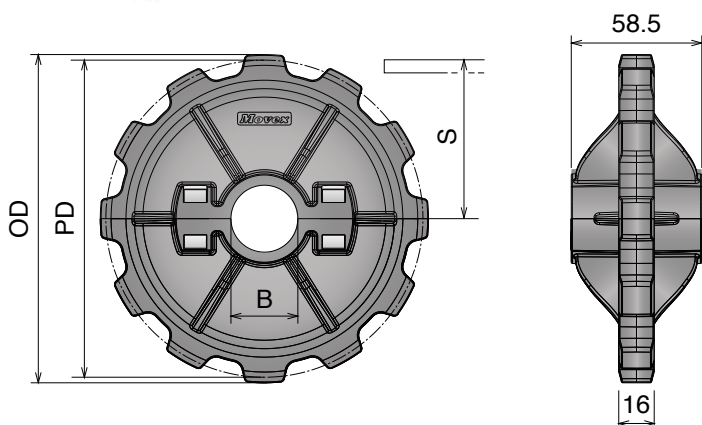

882

Ruota traino divisa, fresata


Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst

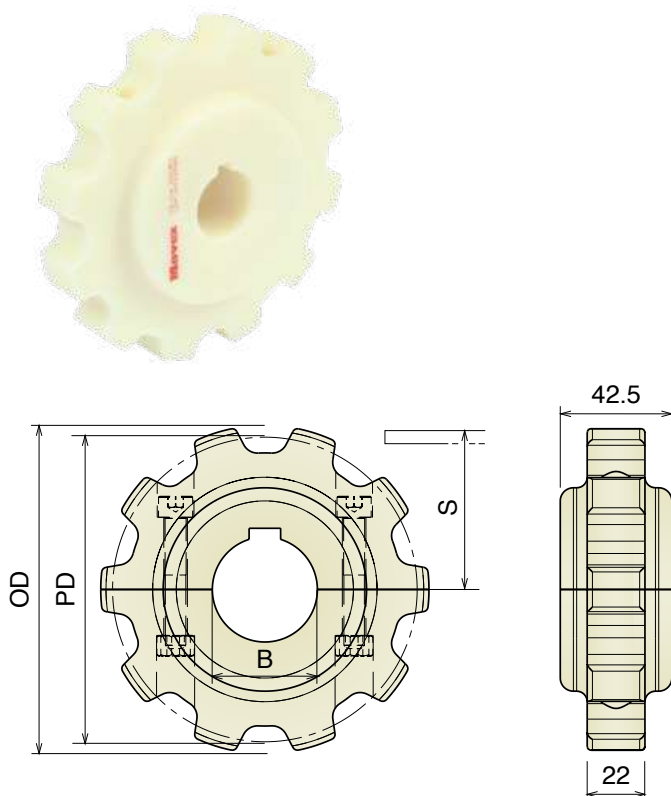Delivery: **Easy** **Standard** Also suitable for Series 8257

Part	Article-Nr.	Z	Bore	PD	OD	S
551	55101	9	25	111,4	112,0	60,5
551	55102		30			
551	55103		35			
551	55104		40			
552	55201	10	25	123,2	125,0	66,4
552	55202		30			
552	55203		35			
552	55204		40			
553	55301	11	25	135,2	137,0	72,4
553	55302		30			
553	55303		35			
553	55304		40			
554	55401	12	25	147,2	149,0	78,4
554	55402		30			
554	55403		35			
554	55404		40			
554	55406		50			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

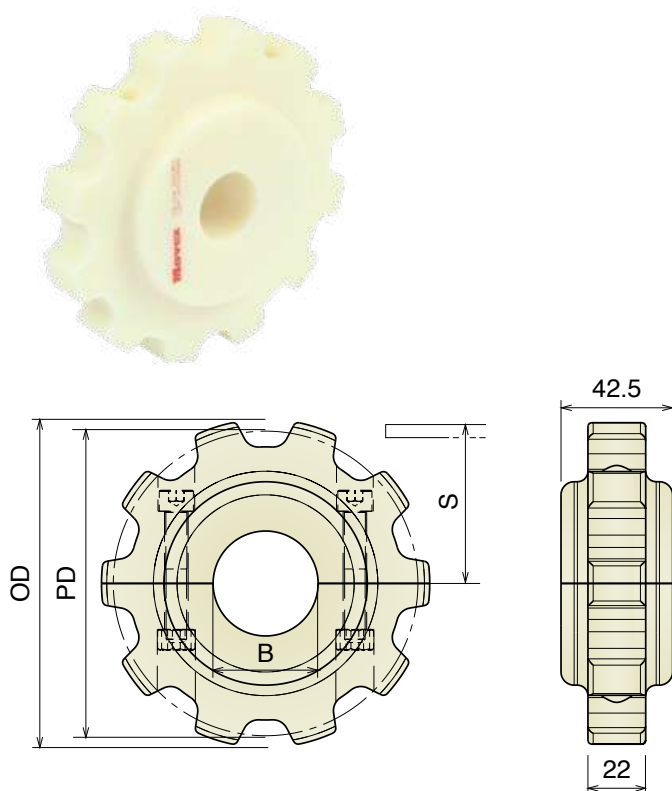

Part	Article-Nr.	Z	Bore	PD	OD	S
551	55150	9	18*	111,4	112,0	60,5
551	55151		25			
551	55152		30			
551	55153		35			
551	55154		40			
552	55250	10	18*	123,2	125,0	66,4
552	55251		25			
552	55252		30			
552	55253		35			
552	55254		40			
553	55350	11	18*	135,2	137,0	72,4
553	55351		25			
553	55352		30			
553	55353		35			
553	55354		40			
554	55450	12	18*	147,2	149,0	78,4
554	55451		25			
554	55452		30			
554	55453		35			
554	55454		40			

*Plain Bore

Materiale / Material / Materialien:

Poliammide rinforzato/Polyamide reinforced/Verstärktes Polyamid
Viti: Acciaio inox/Screws: Stainless steel/Schrauben: Edelstahl
Dadi: Ottone nichelato/Nuts: Nickel plated brass/Mutter: Messing

882

Ruote dentate per catene / Chain sprockets / Kettenräder für Scharnierbandketten


882

Ruota traino divisa, stampata

Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

Delivery: **Easy** **Standard** Also suitable for Series 8257


Part	Article-Nr.	Z-	Bore	PD	OD	S
556	55601	12	25	147,2	149,0	78,4
556	55602		30			
556	55603		35			
556	55604		40			

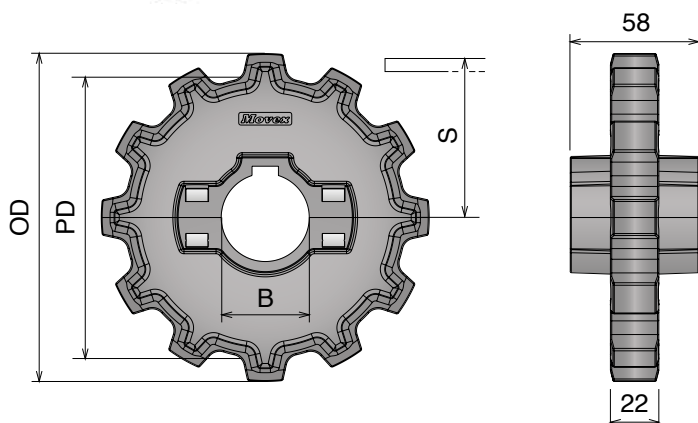

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

Part	Article-Nr.	Z-	Bore	PD	OD	S
556	55651	12	25	147,2	149,0	78,4
556	55652		30			
556	55653		35			
556	55654		40			

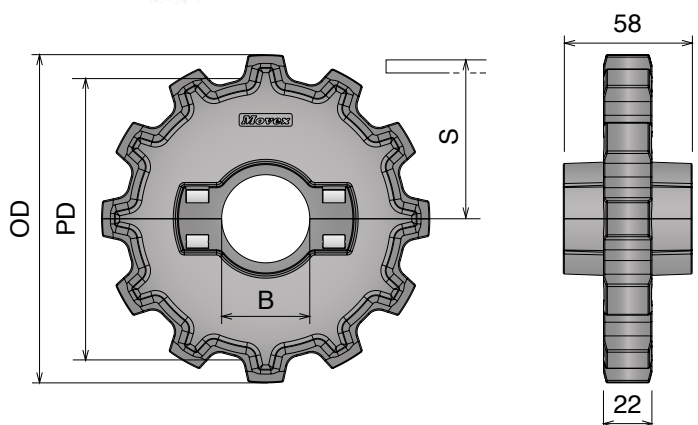


512

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst


Delivery: Easy Standard

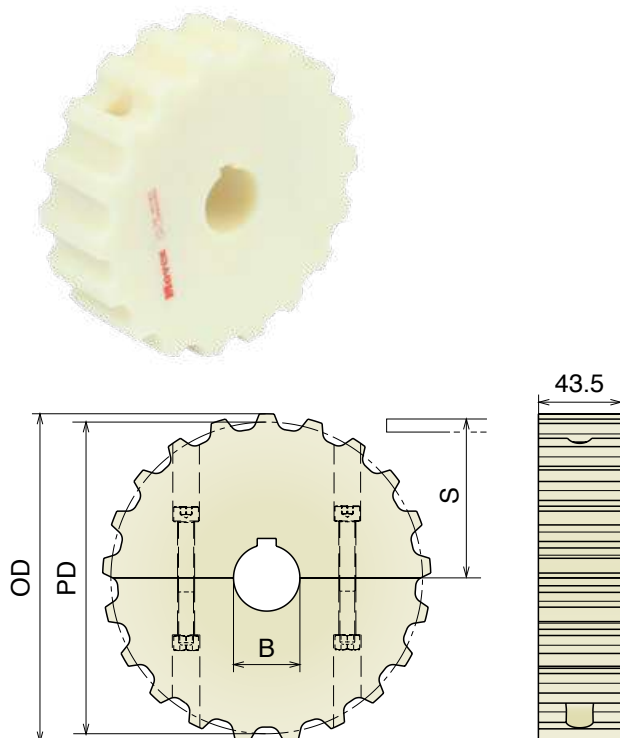

Part	Article-Nr.	Z	Bore	PD	OD	S
557	55701	13	25	108,0	106,1	57,2
557	55702		30			
557	55703		35			
557	55704		40			
558	55801	15	25	124,0	122,2	65,2
558	55802		30			
558	55803		35			
558	55804		40			
559	55901	17	25	138,2	138,2	72,3
559	55902		30			
559	55903		35			
559	55904		40			
560	56001	18	25	146,3	146,4	76,4
560	56002		30			
560	56003		35			
560	56004		40			
561	56101	19	25	154,3	155,7	80,4
561	56102		30			
561	56103		35			
561	56104		40			
562	56201	21	25	170,4	173,0	88,4
562	56202		30			
562	56203		35			
562	56204		40			
563	56301	23	25	186,5	190,0	96,5
563	56302		30			
563	56303		35			
563	56304		40			
564	56401	25	25	202,7	204,0	104,6
564	56402		30			
564	56403		35			
564	56404		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

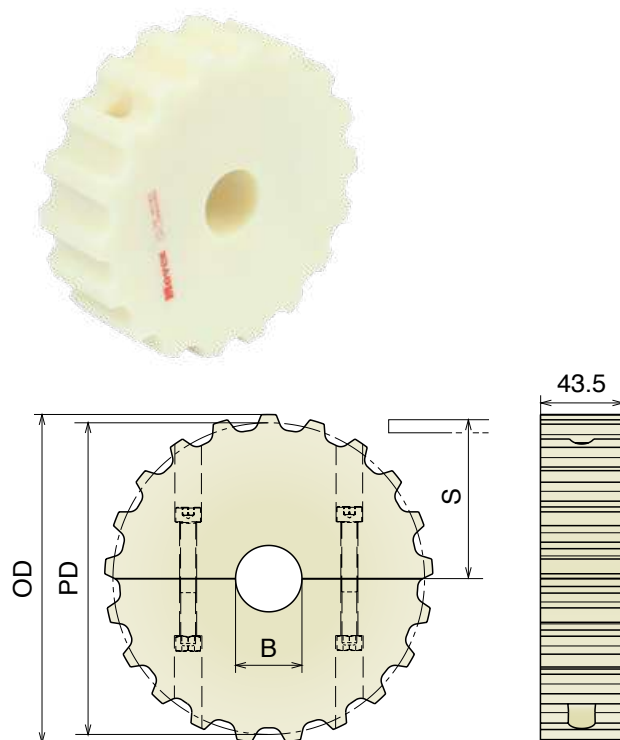

Part	Article-Nr.	Z	Bore	PD	OD	S
557	55750	13	18*	108,0	106,1	57,2
557	55751		25			
557	55752		30			
557	55753		35			
557	55754		40			
558	55850	15	18*	124,0	122,2	65,2
558	55851		25			
558	55852		30			
558	55853		35			
558	55854		40			
559	55950	17	18*	138,2	138,2	72,3
559	55951		25			
559	55952		30			
559	55953		35			
559	55954		40			
560	56050	18	18*	146,3	146,4	76,4
560	56051		25			
560	56052		30			
560	56053		35			
560	56054		40			
561	56150	19	18*	154,3	155,7	80,4
561	56151		25			
561	56152		30			
561	56153		35			
561	56154		40			
562	56250	21	18*	170,4	173,0	88,4
562	56251		25			
562	56252		30			
562	56253		35			
562	56254		40			
563	56350	23	18*	186,5	190,0	96,5
563	56351		25			
563	56352		30			
563	56353		35			
563	56354		40			
564	56450	25	18*	202,7	204,0	104,6
564	56451		25			
564	56452		30			
564	56453		35			
564	56454		40			

*Plain Bore


815

Ruota flangiata divisa, fresata

Split sprocket with guides, machined / Geteiltes Kettenrad mit Bordscheibe, gefräst

RANGE EXTENSION

Delivery: **Easy** **Standard** Anelli Inox / SS Guide-rings / Edelstahl Bordscheibe
Also suitable for Series 881 M

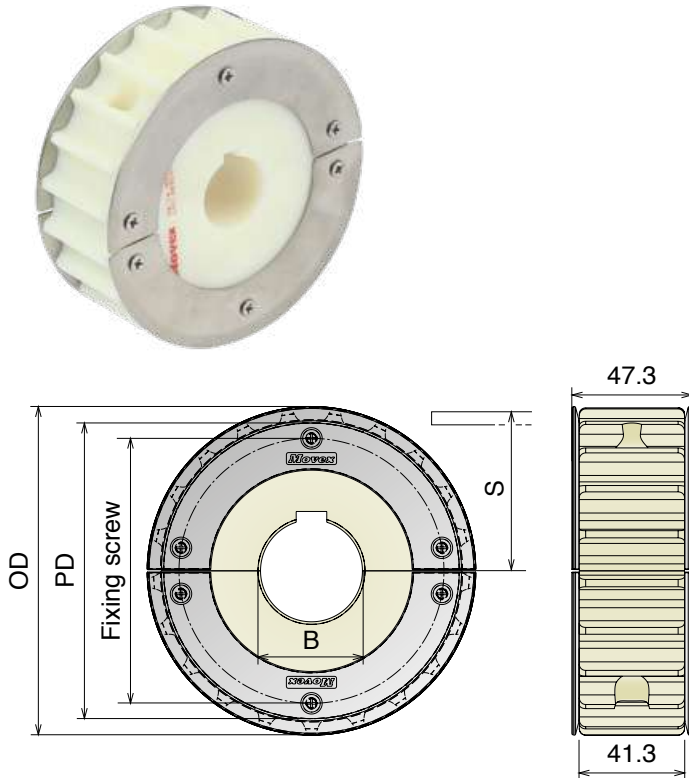

Part	Article-Nr.	Z-	Bore	PD	OD	S	Ø screw
501	50101G	17	25	105,5	103,9	55,9	80,0
501	50102G		30				
501	50103G		35				
501	50104G		40				
503	50301G	21	25	129,3	129,0	67,8	104,0
503	50302G		30				
503	50303G		35				
503	50304G		40				
504	50401G	23	25	141,2	142,0	73,8	116,0
504	50402G		30				
504	50403G		35				
504	50404G		40				
505	50501G	25	25	153,2	154,0	79,8	128,0
505	50502G		30				
505	50503G		35				
505	50504G		40				


8157

Ruota flangiata divisa, fresata

Split sprocket with guides, machined / Geteiltes Kettenrad mit Bordscheibe, gefräst

RANGE EXTENSION

Anelli Inox / SS Guide-rings / Edelstahl Bordscheibe

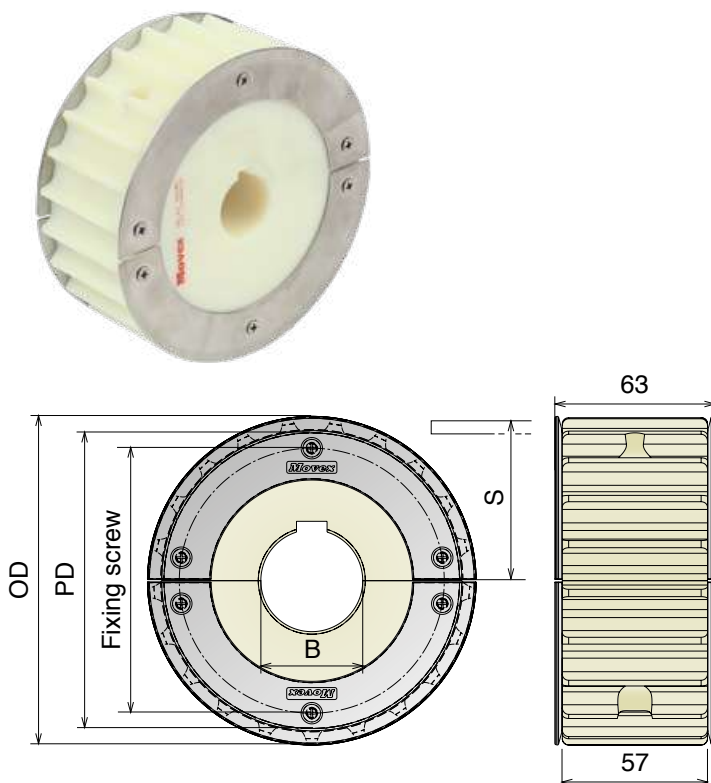

Part	Article-Nr.	Z-	Bore	PD	OD	S	Ø screw
528	52801G	17	25	105,5	103,9	55,9	80,0
528	52802G		30				
528	52803G		35				
528	52804G		40				
530	53001G	21	25	129,3	129,0	67,8	104,0
530	53002G		30				
530	53003G		35				
530	53004G		40				
531	53101G	23	25	141,2	142,0	73,8	116,0
531	53102G		30				
531	53103G		35				
531	53104G		40				
532	53201G	25	25	153,2	154,0	79,8	128,0
532	53202G		30				
532	53203G		35				
532	53204G		40				


805

Ruota flangiata divisa, fresata

Split sprocket with guides, machined / Geteiltes Kettenrad mit Bordscheibe, gefräst

RANGE EXTENSION

Delivery: **Easy** **Standard** Anelli Inox / SS Guide-rings / Edelstahl Bordscheibe

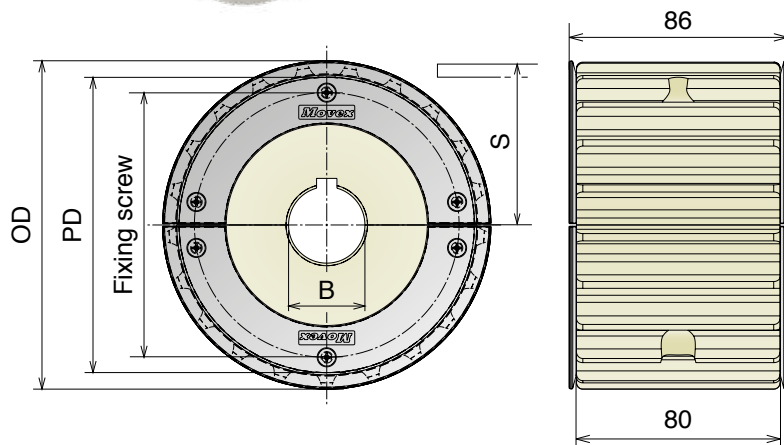

Part	Article-Nr.	Z	Bore	PD	OD	S	Ø screw
521	52101G	17	25	105,5	103,9	55,9	80,0
521	52102G		30				
521	52103G		35				
521	52104G		40				
523	52301G	21	25	129,3	129,0	67,8	104,0
523	52302G		30				
523	52303G		35				
523	52304G		40				
524	52401G	23	25	141,2	142,0	73,8	116,0
524	52402G		30				
524	52403G		35				
524	52404G		40				
525	52501G	25	25	153,2	154,0	79,8	128,0
525	52502G		30				
525	52503G		35				
525	52504G		40				


820

Ruota flangiata divisa, fresata

Split sprocket with guides, machined / Geteiltes Kettenrad mit Bordscheibe, gefräst

RANGE EXTENSION

Anelli Inox / SS Guide-rings / Edelstahl Bordscheibe

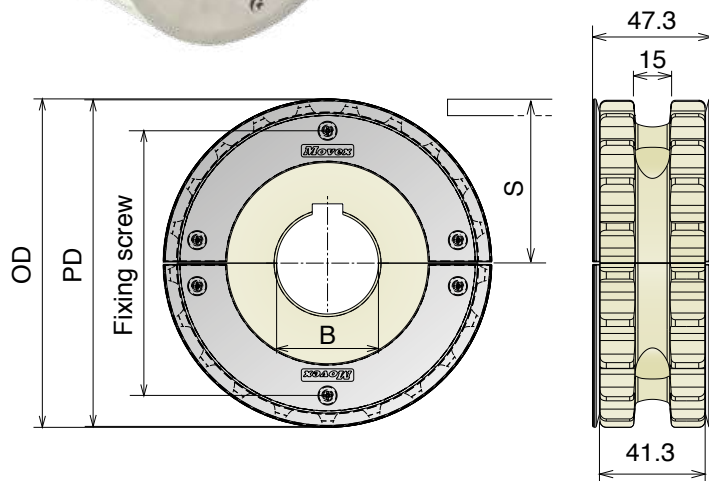

Part	Article-Nr.	Z	Bore	PD	OD	S	Ø screw
535	53501G	17	25	105,5	103,9	55,9	80,0
535	53502G		30				
535	53503G		35				
535	53504G		40				
537	53701G	21	25	129,3	129,0	67,8	104,0
537	53702G		30				
537	53703G		35				
537	53704G		40				
538	53801G	23	25	141,2	142,0	73,8	116,0
538	53802G		30				
538	53803G		35				
538	53804G		40				
539	53901G	25	25	153,2	154,0	79,8	128,0
539	53902G		30				
539	53903G		35				
539	53904G		40				


512

Ruota flangiata divisa, fresata

Split sprocket with guides, machined / Geteiltes Kettenrad mit Bordscheibe, gefräst

Anelli Inox / SS Guide-rings / Edelstahl Bordscheibe

Part	Article-Nr.	Z-	Bore	PD	OD	S	Ø screw
576	57601G	18	25	146,3	147,0	76,4	110,0
576	57602G		30				
576	57603G		35				
576	57604G		40				

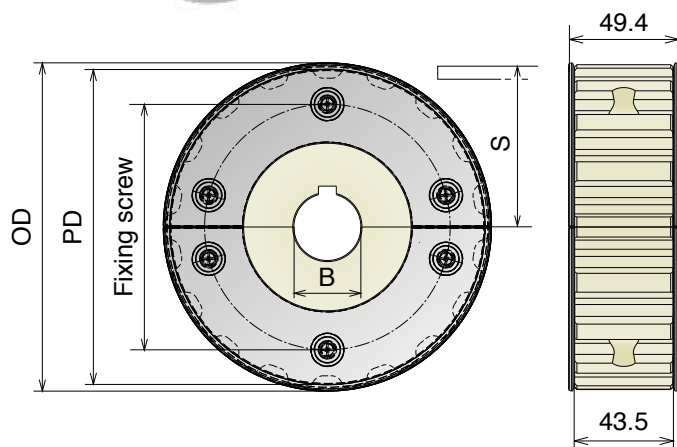


815 MINI

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst


Delivery: **Easy** **Standard**

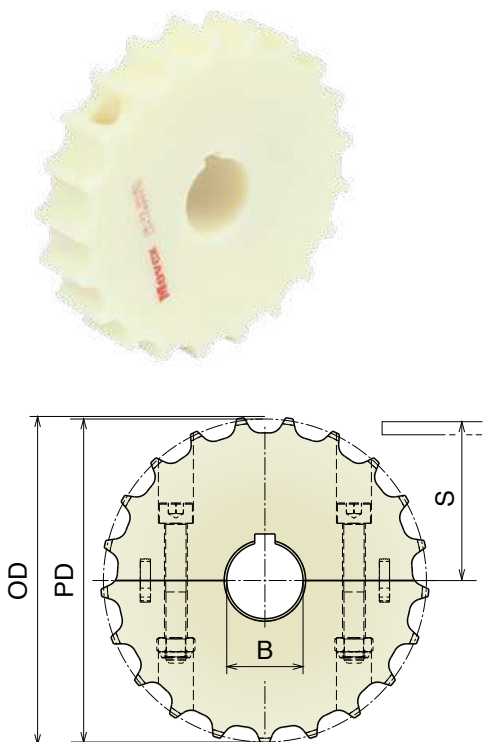

Part	Article-Nr.	Z	Bore	PD	OD	S
580	58001	19	25	117,3	117,0	61,9
580	58002		30			
580	58003		35			
580	58004		40			
581	58101	21	25	129,3	129,0	67,8
581	58102		30			
581	58103		35			
581	58104		40			
582	58201	23	25	141,2	142,0	73,8
582	58202		30			
582	58203		35			
582	58204		40			
583	58301	25	25	153,2	154,0	79,8
583	58302		30			
583	58303		35			
583	58304		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

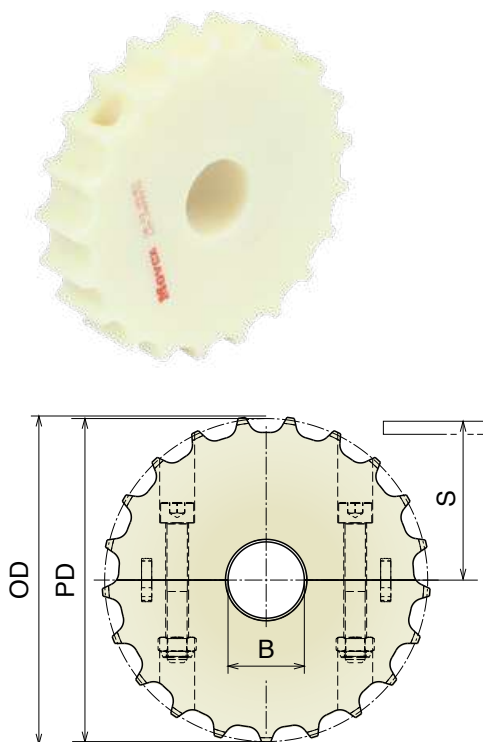

Part	Article-Nr.	Z	Bore	PD	OD	S
580	58050	19	18*	117,3	117,0	61,9
580	58051		25			
580	58052		30			
580	58053		35			
580	58054		40			
581	58150	21	18*	129,3	129,0	67,8
581	58151		25			
581	58152		30			
581	58153		35			
581	58154		40			
582	58250	23	18*	141,2	142,0	73,8
582	58251		25			
582	58252		30			
582	58253		35			
582	58254		40			
583	58350	25	18*	153,2	154,0	79,8
583	58351		25			
583	58352		30			
583	58353		35			
583	58354		40			

*Plain Bore

Materiale / Material / Materialien:

Poliammide/Polyamide/Polyamid

Viti: Acciaio inox/Screws: Stainless steel/Schrauben: Edelstahl

Dadi: ferro zincato/Nuts: zinc plated steel/Mutter: verzinkter Stahl

CC 600-CC 1400

Ruote dentate per catene / Chain sprockets / Kettenräder für Scharnierbandketten

CC 600


Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

For adequate quantities these sprockets can be delivered with finished bore.

Part	Article-Nr.	Z-	Bore	PD	OD	S
565	56550	8	20	166,0	172,0	70,0
566	56650	10	20	205,0	215,0	89,5
567	56750	12	20	246,0	256,0	110,0
568	56850	14	20	286,0	297,0	130,0

Other bores available on request

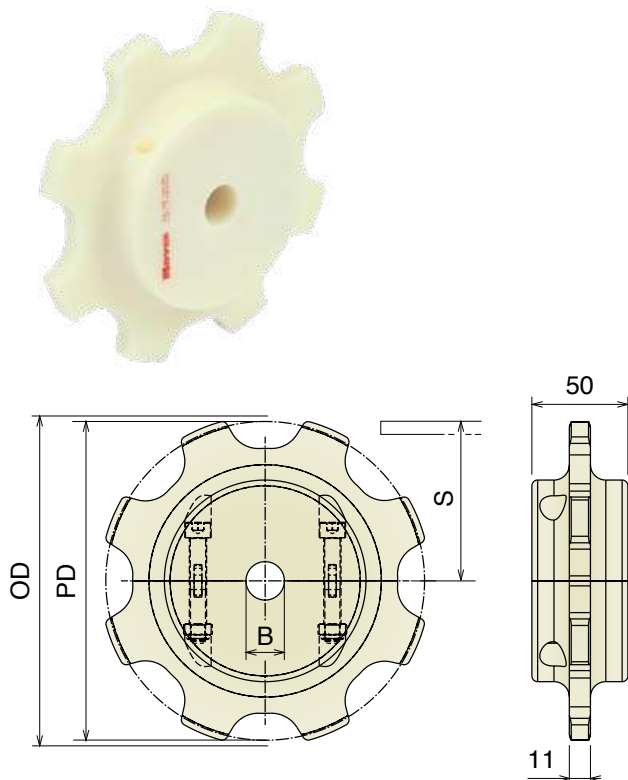

CC 1400


Ruota rinvio, fresata

Idler sprocket, machined / Umlenkrad, gefräst

For adequate quantities these sprockets can be delivered with finished bore.

Part	Article-Nr.	Z-	Bore	PD	OD	S
570	57050E	7	20	190,0	202,0	78,0
571	57150E	8	20	218,0	227,6	92,0
572	57250E	10	20	267,0	279,0	116,0

Other bores available on request

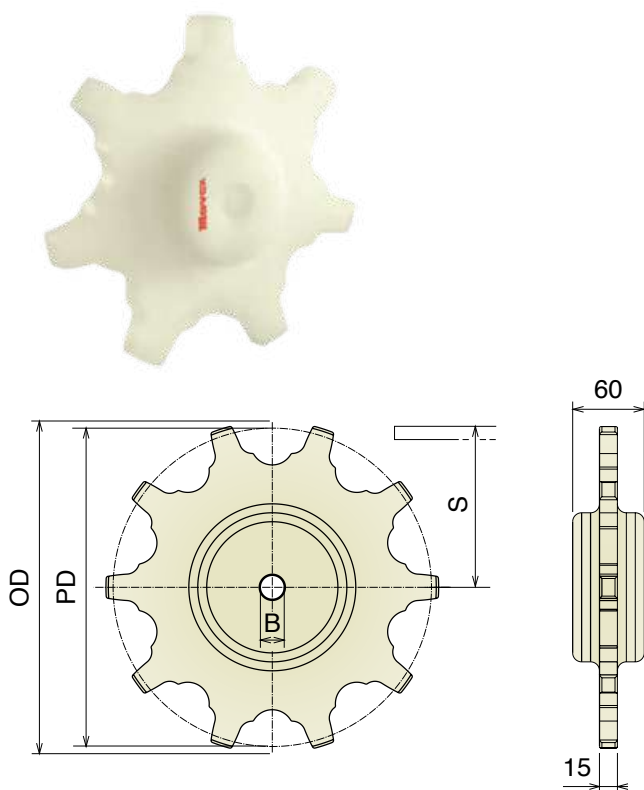

1701-1706-765 NO GAP

Ruote dentate per catene / Chain sprockets / Kettenräder für Scharnierbandketten

Materiali / Material / Materialien:

Poliammide/Polyamide/Polyamid

Viti: Acciaio inox/Screws: Stainless steel/Schrauben: Edelstahl


Dadi: ferro zincato/Nuts: zinc plated steel/Mutter: verzinkter Stahl

1701-1706-765 NO GAP

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst


Delivery: **Easy** **Standard**

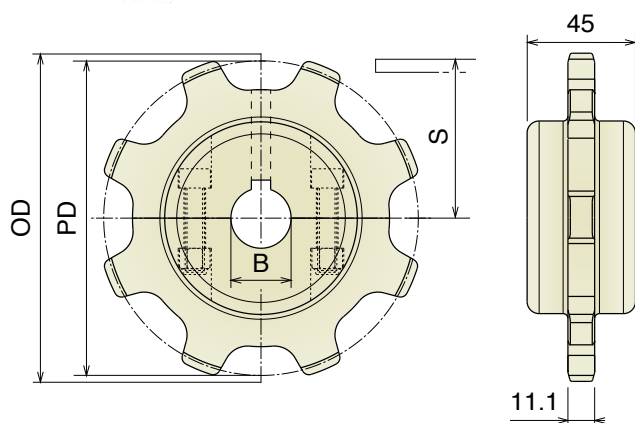

Part	Article-Nr.	Z	Bore	PD	OD	S
573	57301	8	25	130,7	132,75	53,0
573	57302		30			
573	57303		35			
573	57304		40			
574	57401	10	25	161,8	165,1	69,0
574	57402		30			
574	57403		35			
574	57404		40			
575	57501	13	25	208,9	215,0	93,5
575	57502		30			
575	57503		35			
575	57504		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

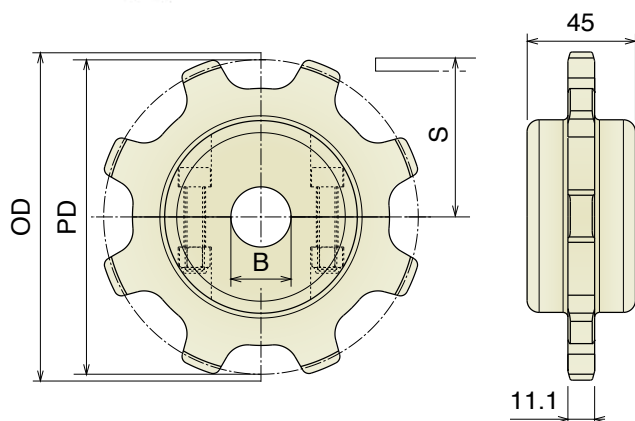


Part	Article-Nr.	Z	Bore	PD	OD	S
573	57350	8	18*	130,7	132,75	53,0
573	57351		25			
573	57352		30			
573	57353		35			
573	57354		40			
574	57450	10	18*	161,8	165,1	69,0
574	57451		25			
574	57452		30			
574	57453		35			
574	57454		40			
575	57550	13	18*	208,9	215,0	93,5
575	57551		25			
575	57552		30			
575	57553		35			
575	57554		40			

*Plain Bore

43 MF-63 MF

Ruota traino, stampata
Drive sprocket, molded / Antriebskettenrad, gespritzt


Delivery:	Easy	Standard	Part	Article-Nr.	Z-	Bore	PD	OD	S
			586	58600	11	20	90,2	94,5	56,5

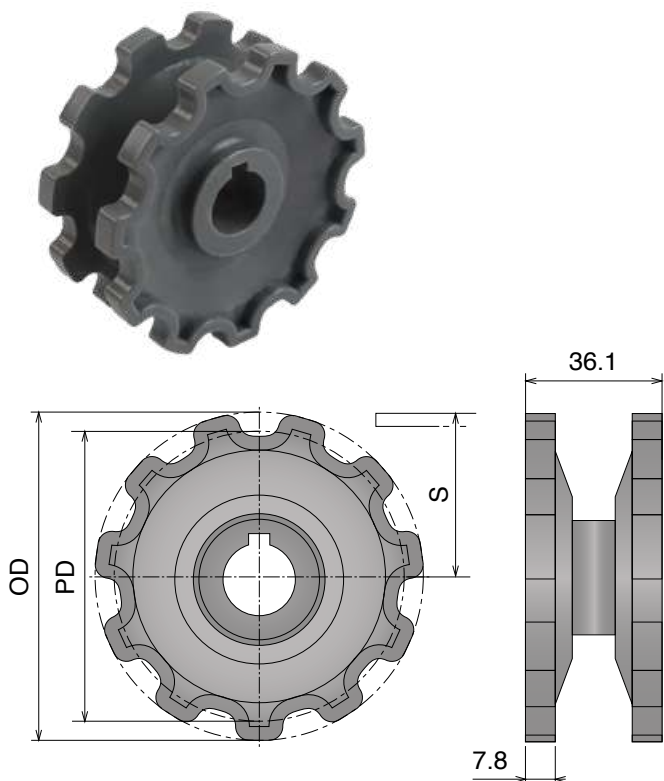

103 MF

Ruota traino, stampata
Drive sprocket, molded / Antriebskettenrad, gespritzt


Delivery:	Easy	Standard	Part	Article-Nr.	Z-	Bore	PD	OD	OD
			587	58701	12	25	129,4	144,5	82,5

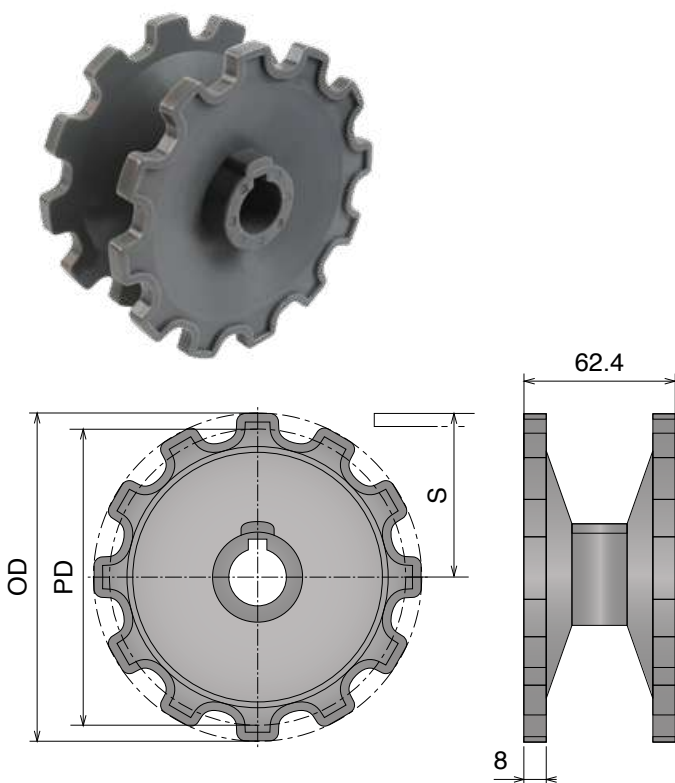

83 MF

Ruota traino, fresata


Drive sprocket, machined / Antriebskettenrad gefräst

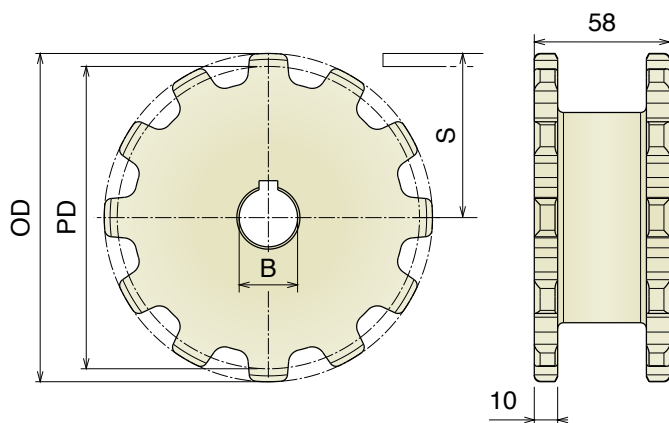

Part	Article-Nr.	Z-	Bore	PD	OD	S
589	58901E	9	25	97,9	108,5	62,0
589	58902E		30			
589	58903E		35			
589	58904E		40			
588	58801E	12	25	129,4	140,0	77,7
588	58802E		30			
588	58803E		35			
588	58804E		40			

Ruota rinvio, fresata

Idler sprocket, machined / Umlenkrad, gefräst

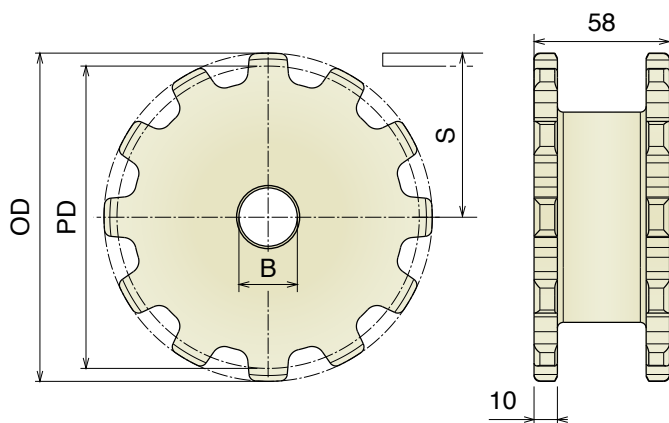

Part	Article-Nr.	Z-	Bore	PD	OD	S
589	58950E	9	18*	97,9	108,5	62,0
589	58951E		25			
589	58952E		30			
589	58953E		35			
589	58954E		40			
588	58850E	12	18*	129,4	140,0	77,7
588	58851E		25			
588	58852E		30			
588	58853E		35			
588	58854E		40			


*Plain Bore

83 M-140 M

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst

Part	Article-Nr.	Z-	Bore	PD	OD	S
590	59001	9	25	111,4	108,0	68,5
590	59002		30			
590	59003		35			
590	59004		40			
591	59101	12	25	147,2	145,3	86
591	59102		30			
591	59103		35			
591	59104		40			

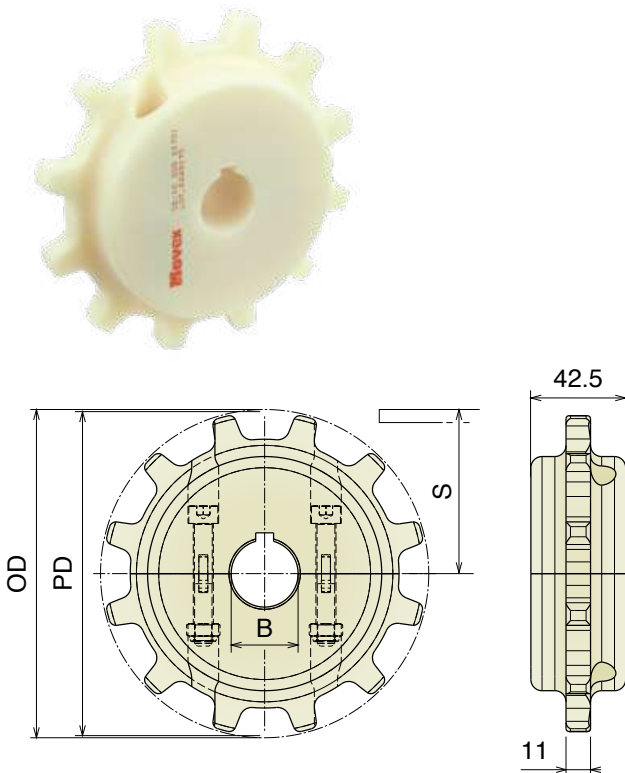


Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

Part	Article-Nr.	Z-	Bore	PD	OD	S
590	59050	9	18*	111,4	108,0	68,5
590	59051		25			
590	59052		30			
590	59053		35			
590	59054		40			
591	59150	12	18*	147,2	145,3	86
591	59151		25			
591	59152		30			
591	59153		35			
591	59154		40			

*Plain Bore

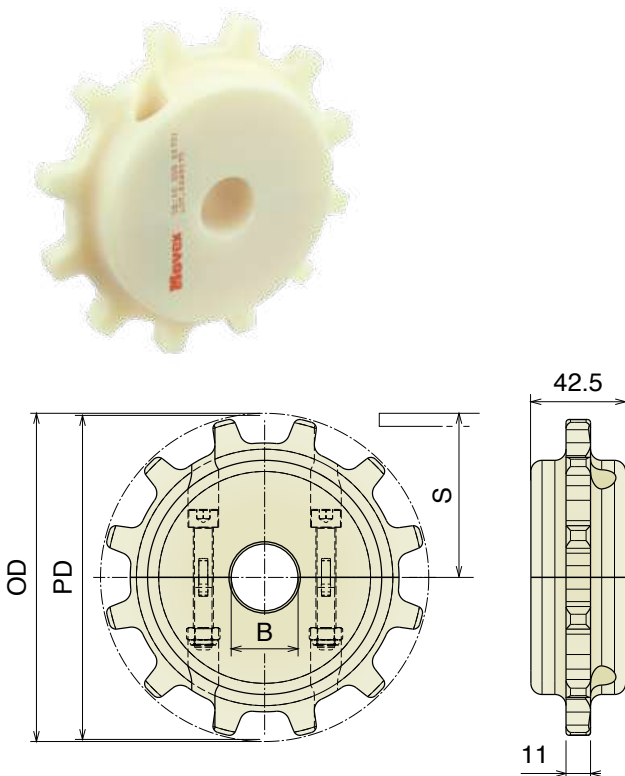


Turning disks

RANGE EXTENSION

The use of drive disks, idler disks and turnings disks enables the design of the conveyor to be realized with many curves, greatly reducing the PV and guaranteeing exceeding performances compared to traditional system.


Thanks to our machined versions, superior tolerances and planarity are provided; it will then become easier to realize longer conveyors either at the same level or staggered, inclined or declined.

DRIVE DISK

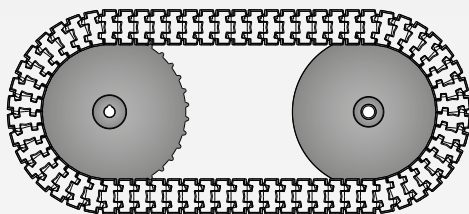

TURNING DISK

Oil seal

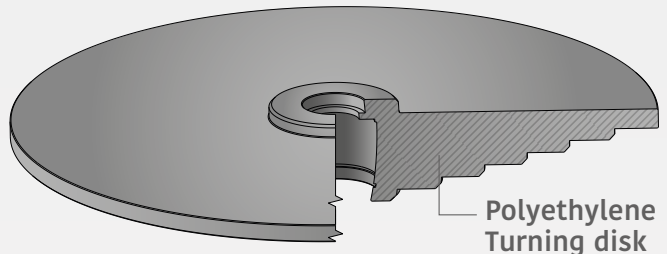

Polyethylene Turning disk

Bearing


PVC-Spacer

Bearing


Seeger

Oil seal


TYPES AVAILABLE



DRIVE DISK




IDLER DISK



TURNING DISK


POSSIBLE APPLICATIONS

MACHINED DISK
OPTION A




CLOSED VERSION

MACHINED DISK
OPTION B




OPEN VERSION

MACHINED DISK
OPTION C




CLOSED VERSION
+ OPEN VERSION

MACHINED DISK
OPTION D
h1: min 25mm



OPEN VERSION
+ OPEN VERSION

MOLDED DISK
OPTION A
h1: min 25mm




OPEN VERSION
+ OPEN VERSION

For a correct installation of the shaft and the position of the circlips, please contact your sales representative.

NEW 878 TAB Ruota tangenziale Tangential sprockets / Tangentiale kettenräder

Suitable for 878 TAB | Drive disk with grub screws included

Drive disk, machined

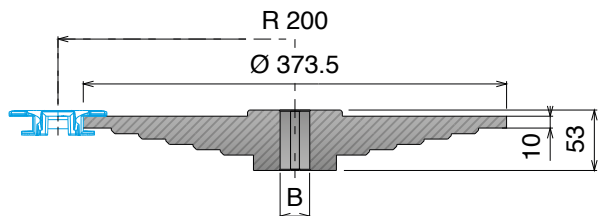


OPEN VERSION



ROUNDBORE
WITH KEYWAY

Article-Nr.	Z-	Bore
59300	34	20
59301		25
59302		30
59303		35
59304		40

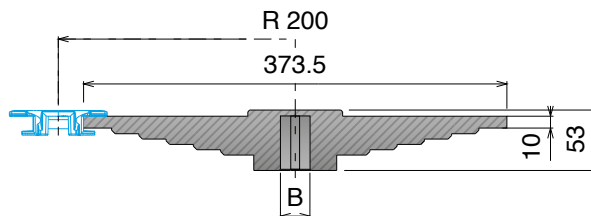


CLOSED VERSION



ROUNDBORE
WITH KEYWAY

Article-Nr.	Z-	Bore
59300C	34	20
59301C		25
59302C		30
59303C		35
59304C		40

Idler disk, machined

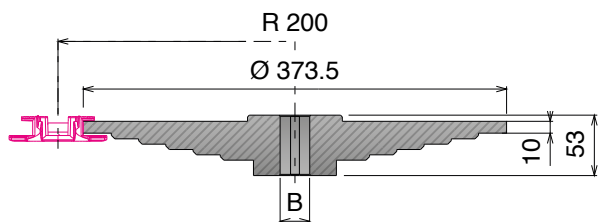


OPEN VERSION



ROUNDBORE

Article-Nr.	Z-	Bore
59361	34	20
59362		25
59363		30
59364		35
59365		40

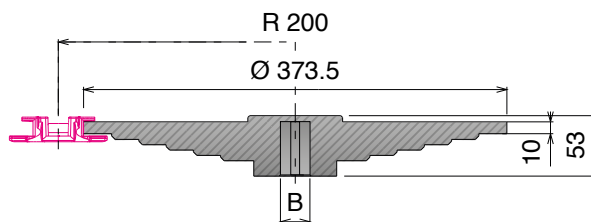

CLOSED VERSION




ROUNDBORE

Article-Nr.	Z-	Bore
59371C	34	20
59372C		25
59373C		30
59374C		35
59375C		40

NEW 878 TAB Disco di ritorno Turning disk / Umlenkscheibe


Suitable for 878 TAB | Bearings and oils seal included

Turning disk, machined - Carry and return side

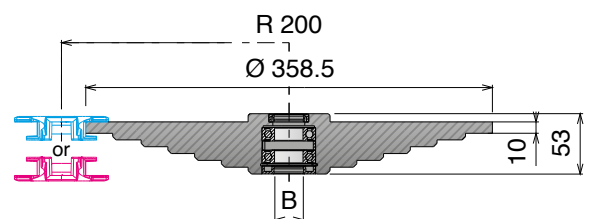

OPEN VERSION
ROUNDBORE

Article-Nr.	Bore
593510	25

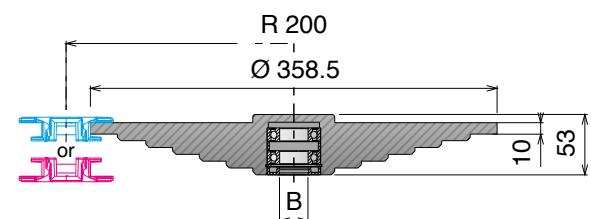

CLOSED VERSION
ROUNDBORE



Article-Nr.	Bore
59351C	25

NEW 878 TAB Curves

Specific for drive, idler and turning disk applications

Chain Reference

878 TAB - K325/K450

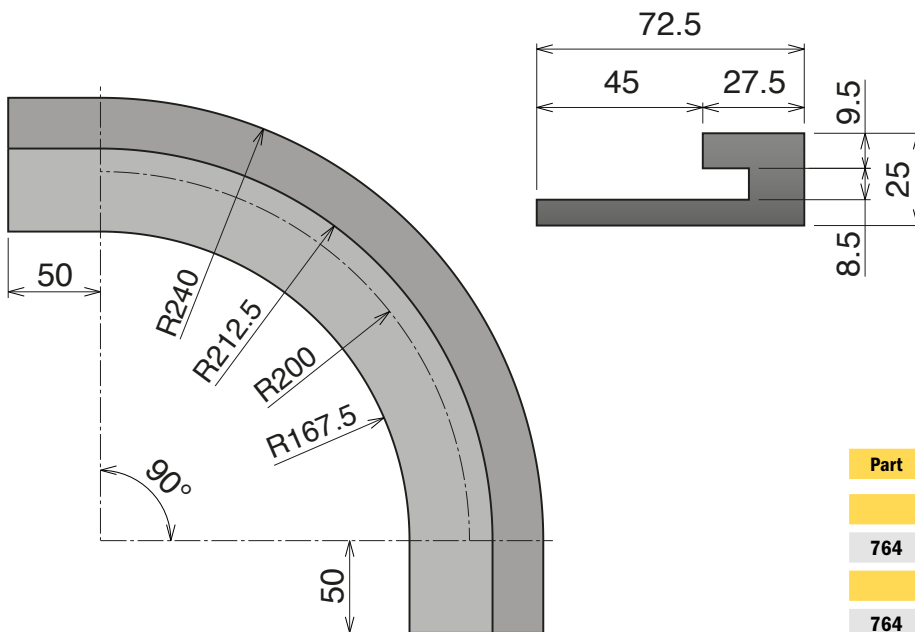

TAB SYSTEM

Part	α 90°	α 180°	Tracks	W
K325				
764	76411072	76421072	1	72,5
K450				
764	76411087	76421087	1	87,5


NEW 1701 TAB OP-1701 TAB OPF

Disco di ritorno
 Turning disk / Umlenkscheibe

Suitable for 1701 TAB OP - 1701 TAB OPF | Bearings and oils seal included



Turning disk, machined - Carry side

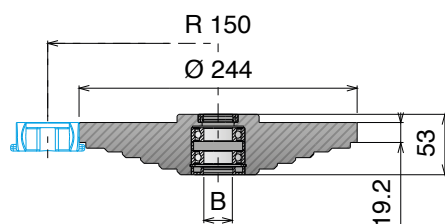


OPEN VERSION
 ROUND BORE

Article-Nr.

Bore

594010

25

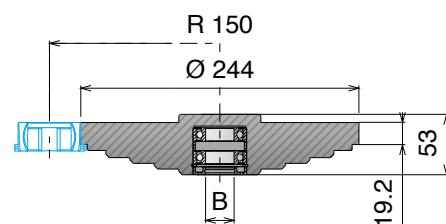

CLOSED VERSION
 ROUND BORE


Article-Nr.

Bore

59401C

25

Turning disk, machined - Return side

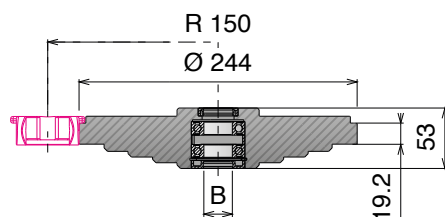


OPEN VERSION
 ROUND BORE

Article-Nr.

Bore

594210

25

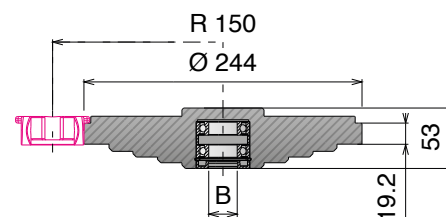

CLOSED VERSION
 ROUND BORE

Article-Nr.

Bore

59421C


25

NEW 1706-1706 TAB-765 NO GAP

Disco di ritorno
 Turning disk / Umlenkscheibe


Suitable for 1706 - 1706 TAB - 765 NO GAP | Bearings and oils seal included

Turning disk, machined - Carry side

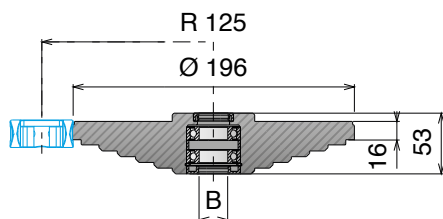

OPEN VERSION
 ROUND BORE


Article-Nr.	Bore
595010	25

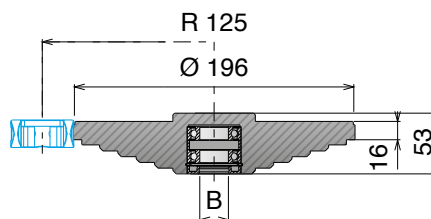

CLOSED VERSION
 ROUND BORE


Article-Nr.	Bore
59501C	25

Turning disk, machined - Return side

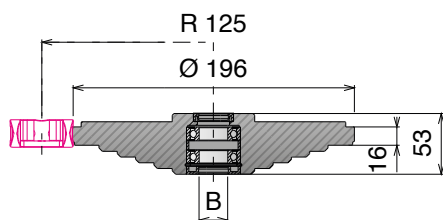

OPEN VERSION
 ROUND BORE

Article-Nr.	Bore
595210	25

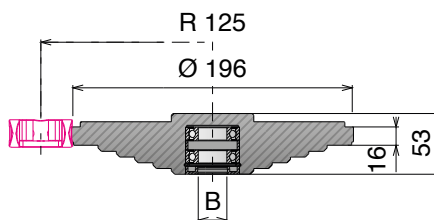

CLOSED VERSION
 ROUND BORE


Article-Nr.	Bore
59521C	25

NEW 43 MF-63 MF-83 MF-103 MF

Disco di ritorno
 Turning disk / Umlenkscheibe

Suitable for 43 MF - 63 MF - 83 MF - 103 MF | Bearings included


Drive turning disk, molded - Carry side

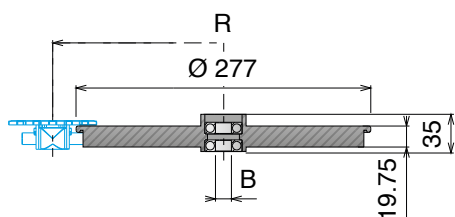

OPEN VERSION
 ROUND BORE

Article-Nr.	Bore
170000	15

R: 43 MF-63 MF 150 83 MF 160 103 MF 170

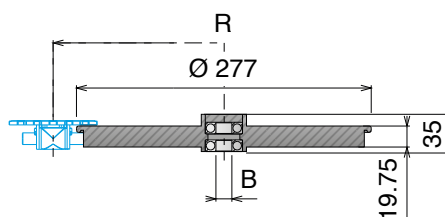

CLOSED VERSION
 ROUND BORE


Article-Nr.	Bore
170000C	15

R: 43 MF-63 MF 150 83 MF 160 103 MF 170

NEW 83 M Disco di ritorno Turning disk / Umlenkscheibe


Suitable for 83 M | Bearing and screws included

Turning disk, machined - Carry and return side

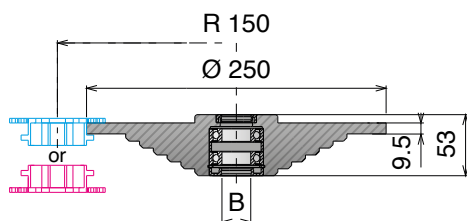

OPEN VERSION
ROUNDBORE

Article-Nr.	Bore
596010	25

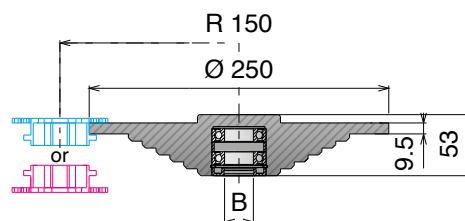


CLOSED VERSION
ROUNDBORE

Article-Nr.	Bore
59601C	25

NEW 140 M Disco di ritorno Turning disk / Umlenkscheibe


Suitable for 140 M | Bearing and screws included

Turning disk, machined - Carry and return side

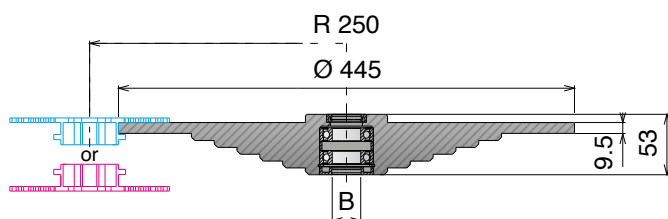

OPEN VERSION
ROUNDBORE

Article-Nr.	Bore
596210	25

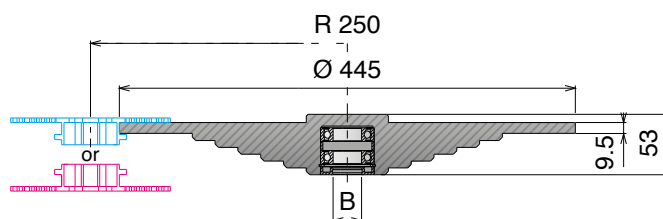

CLOSED VERSION
ROUNDBORE

Article-Nr.	Bore
59621C	25

For bore tolerance refers to
Movex engineering manual
available on our website.



815 Pag 108	815 Pag 108	805 Pag 109
821 Pag 109	881 TAB Pag 110	882 M Pag 110

Chain idler wheels

Material
Info:



pg. 666

Materiale / Material / Materialien:

Poliammide/Polyamide/Polyamid

Viti: Acciaio inox/Screws: Stainless steel/Schrauben: Edelstahl


Dadi: ferro zincato/Nuts: zinc plated steel/Mutter: verzinkter Stahl

Dadi: ottone nichelato per stampate/Nuts: nickel plated brass for molded/Mutter: Messing vernickelt für gespritzt Version

815

Ruota rinvio liscia, divisa, fresata

Split idler wheel, machined / geteilte Umlenkrolle, gefräst

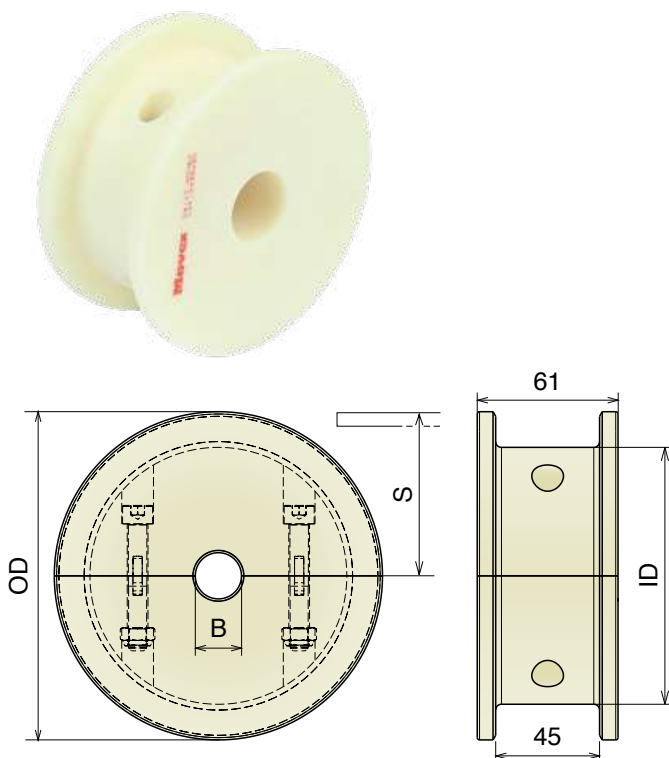
Delivery: **Easy** **Standard** Also suitable for Series 881 M - 820 - 831 - 828 - 879 M - 880 - 880 M

Part	Article-Nr.	ecq. Z.	Bore	OD	ID	S
601	60100	17	20	104,0	75,2	56,2
601	60101		25			
601	60102		30			
601	60103		35			
601	60104		40			
602	60200	19	20	117,0	92,2	62,6
602	60201		25			
602	60202		30			
602	60203		35			
602	60204		40			
603	60300	21	20	129,8	105,0	68,6
603	60301		25			
603	60302		30			
603	60303		35			
603	60304		40			
604	60400	23	20	142,2	111,3	74,6
604	60401		25			
604	60402		30			
604	60403		35			
604	60404		40			
605	60500	25	20	154,7	124,7	80,5
605	60501		25			
605	60502		30			
605	60503		35			
605	60504		40			
606	60600	27	20	167,2	135,0	88,5
606	60601		25			
606	60602		30			
606	60603		35			
606	60604		40			
607	60700	29	20	179,3	140,0	92,8
607	60701		25			
607	60702		30			
607	60703		35			
607	60704		40			

815

Ruota rinvio liscia, divisa, stampata

Split idler wheel, molded / geteilte Umlenkrolle, gespritzt

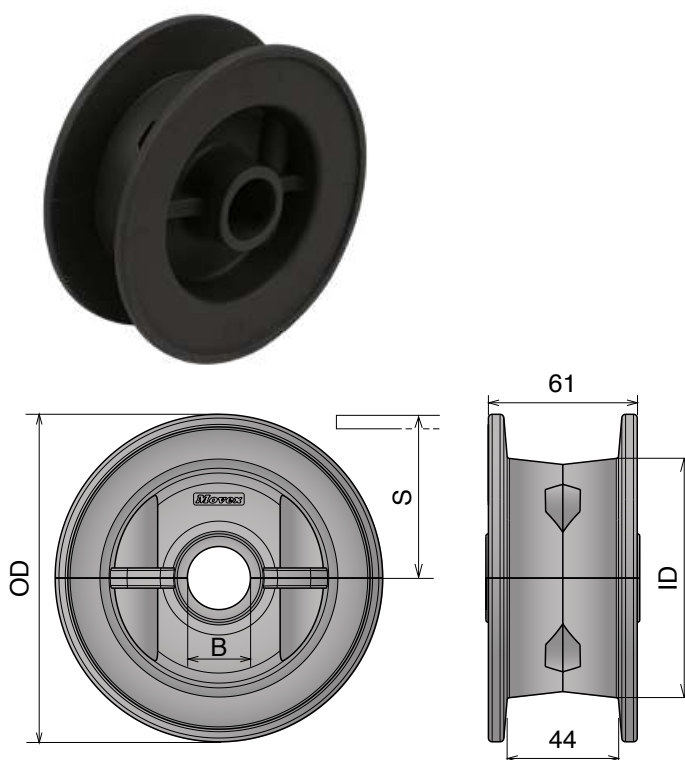Delivery: **Easy** **Standard** Also suitable for Series 881 M - 820 - 831 - 828 - 879 M - 880 - 880 M


Part	Article-Nr.	ecq. Z.	Bore	OD	ID	S
608	60801	21	25	129,8	94,8	68,6
608	60802		30			
608	60803		35			
608	60804		40			
609	60901	23	25	142,2	99,3	74,6
609	60902		30			
609	60903		35			
609	60904		40			
610	61001	25	25	154,7	102,0	80,5
610	61002		30			
610	61003		35			
610	61004		40			

805

Ruota rinvio liscia, divisa, fresata

Split idler wheel, machined / geteilte Umlenkrolle, gefräst

Delivery: **Easy** **Standard**

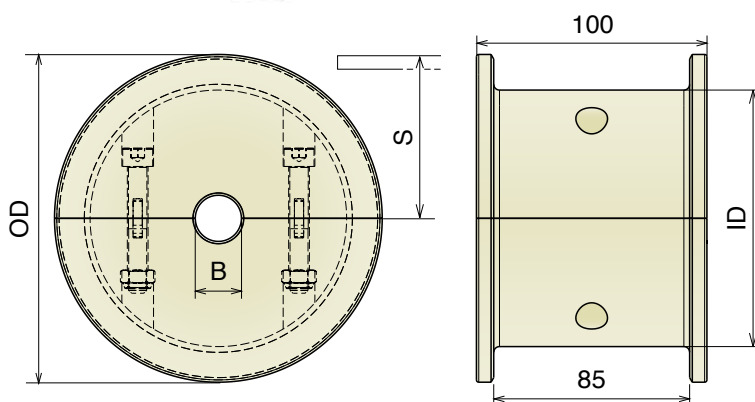


Part	Article-Nr.	ecq. Z-	Bore	OD	ID	S
611	61100	17	20	104,0	75,2	56,2
611	61101		25			
611	61102		30			
611	61103		35			
611	61104		40			
612	61200	19	20	117,0	92,2	62,6
612	61201		25			
612	61202		30			
612	61203		35			
612	61204		40			
613	61300	21	20	129,8	105,0	68,6
613	61301		25			
613	61302		30			
613	61303		35			
613	61304		40			
614	61400	23	20	142,2	111,3	74,6
614	61401		25			
614	61402		30			
614	61403		35			
614	61404		40			
615	61500	25	20	154,7	124,7	80,5
615	61501		25			
615	61502		30			
615	61503		35			
615	61504		40			
616	61600	27	20	167,2	135,0	88,5
616	61601		25			
616	61602		30			
616	61603		35			
616	61604		40			
617	61700	29	20	179,3	140,0	92,8
617	61701		25			
617	61702		30			
617	61703		35			
617	61704		40			

821

Ruota rinvio liscia, divisa, fresata

Split idler wheel, machined / geteilte Umlenkrolle, gefräst

Delivery: **Easy** **Standard**

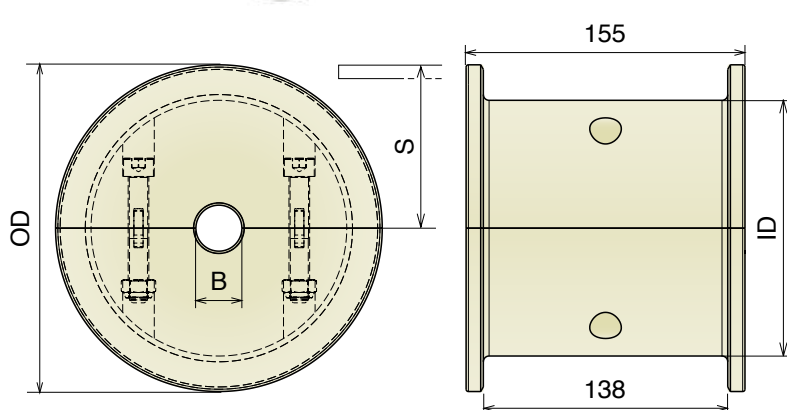

Part	Article-Nr.	ecq. Z-	Bore	OD	ID	S
625	62500	19	20	117,0	92,2	62,6
625	62501		25			
625	62502		30			
625	62503		35			
625	62504		40			
626	62600	21	20	129,8	105,0	68,6
626	62601		25			
626	62602		30			
626	62603		35			
626	62604		40			
627	62700	23	20	142,2	111,3	74,6
627	62701		25			
627	62702		30			
627	62703		35			
627	62704		40			
628	62800	25	20	154,7	124,7	80,5
628	62801		25			
628	62802		30			
628	62803		35			
628	62804		40			

881 TAB-882 M

Ruote folli per catene / Chain idler wheels / Umlenkrollen für Scharnierbandketten

Materiali / Material / Materialien:

Poliammide/Polyamide/Polyamid

Viti: Acciaio inox/Screws: Stainless steel/Schrauben: Edelstahl


Dadi: ferro zincato/Nuts: zinc plated steel/Mutter: verzinkter Stahl

881 TAB

Ruota rinvio liscia, divisa, fresata

Split idler wheel, machined / geteilte Umlenkrolle, gefräst

Delivery: **Easy** **Standard**

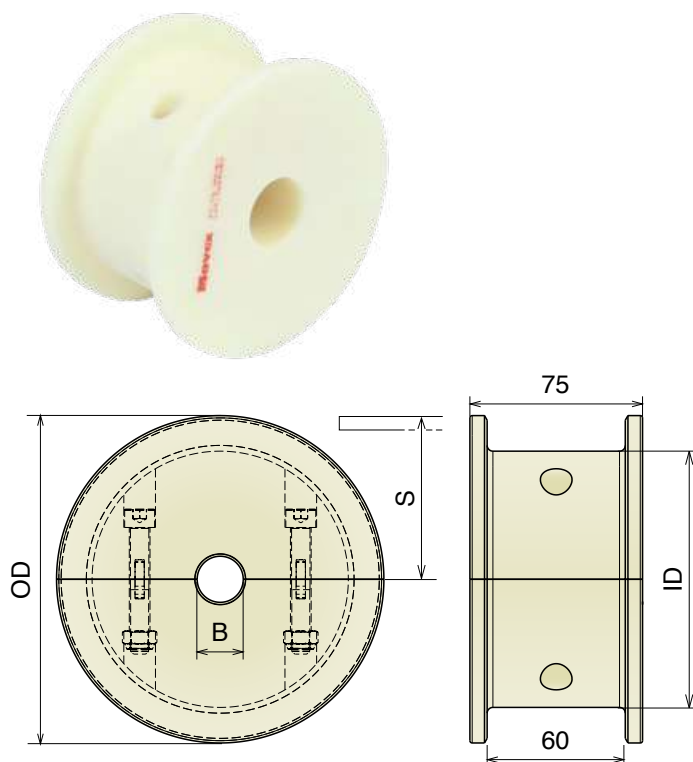


Part	Article-Nr.	ecq. Z.	Bore	OD	ID	S
618	61800	17	20	104,0	66,0	56,2
618	61801		25			
618	61802		30			
618	61803		35			
618	61804		40			
619	61900	19	20	117,0	75,0	62,6
619	61901		25			
619	61902		30			
619	61903		35			
619	61904		40			
620	62000	21	20	129,8	95,0	68,6
620	62001		25			
620	62002		30			
620	62003		35			
620	62004		40			
621	62100	23	20	142,2	108,0	74,6
621	62101		25			
621	62102		30			
621	62103		35			
621	62104		40			
622	62200	25	20	154,7	112,0	80,5
622	62201		25			
622	62202		30			
622	62203		35			
622	62204		40			
623	62300	27	20	167,2	120,0	88,5
623	62301		25			
623	62302		30			
623	62303		35			
623	62304		40			
624	62400	29	20	179,3	130,0	92,8
624	62401		25			
624	62402		30			
624	62403		35			
624	62404		40			

882 M

Ruota rinvio liscia, divisa, fresata

Split idler wheel, machined / geteilte Umlenkrolle, gefräst


Delivery: **Easy** **Standard** Also suitable for Series 8157 - 8257 - 8857 M - 8857 M GT

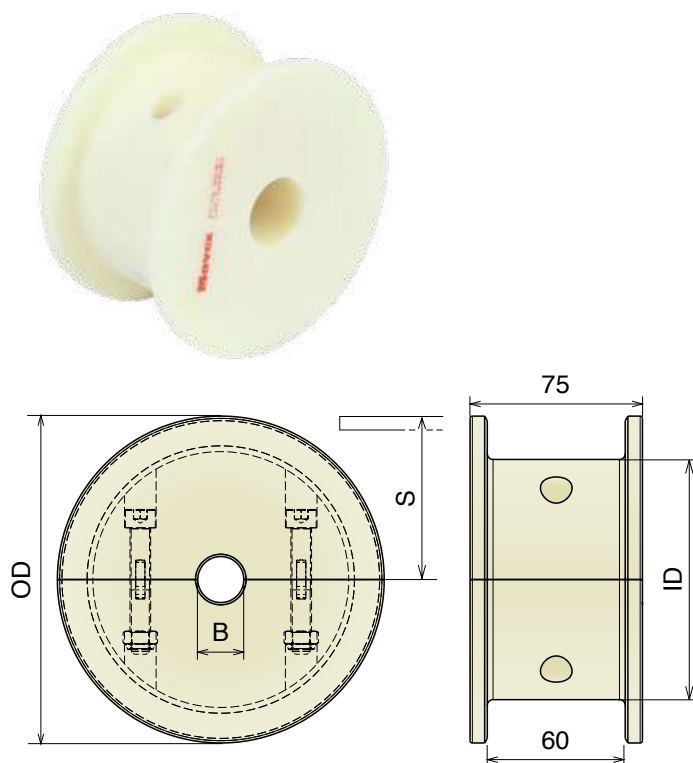

Part	Article-Nr.	ecq. Z.	Bore	OD	ID	S
629	62900	17	20	104,0	75,2	56,2
629	62901		25			
629	62902		30			
629	62903		35			
629	62904		40			
630	63000	19	20	117,0	92,2	62,6
630	63001		25			
630	63002		30			
630	63003		35			
630	63004		40			
631	63100	21	20	129,8	105,0	68,6
631	63101		25			
631	63102		30			
631	63103		35			
631	63104		40			
632	63200	23	20	142,2	111,3	74,6
632	63201		25			
632	63202		30			
632	63203		35			
632	63204		40			
633	63300	25	20	154,7	124,7	80,5
633	63301		25			
633	63302		30			
633	63303		35			
633	63304		40			
634	63400	27	20	167,2	135,0	88,5
634	63401		25			
634	63402		30			
634	63403		35			
634	63404		40			
635	63500	29	20	179,3	140,0	92,8
635	63501		25			
635	63502		30			
635	63503		35			
635	63504		40			


Movex® Corner tracks

MAGNETIC, TAB and BEVEL



Magnetic

The magnetic corner track is the most effective and reliable system for the table top conveyor design.




The magnets are carefully selected and positioned to provide the correct magnetic field to hold the chain on the corner track and this provides a flat carrying surface for the chain; thus, improving product stability and support for the product.




TAB

TAB type corner tracks are a more economical solution compared to magnetic curves.




In those applications where cleaning and product support are less important, they can perfectly be used.



Bevel

Bevel corner tracks are another alternative to magnetic and TAB corner track solutions.



Compared with TAB system it is more accessible but an additional support in the return is required.



Standard

UHMW-PE


e.g. lubricated steel & plastic chains and belts



Abrasive

CONDITIONS


e.g. Dry running steel chains or polluted circumstances



BluLub®

HIGH PERFORMANCE

e.g. Dry running plastic chains and belts & high speed application

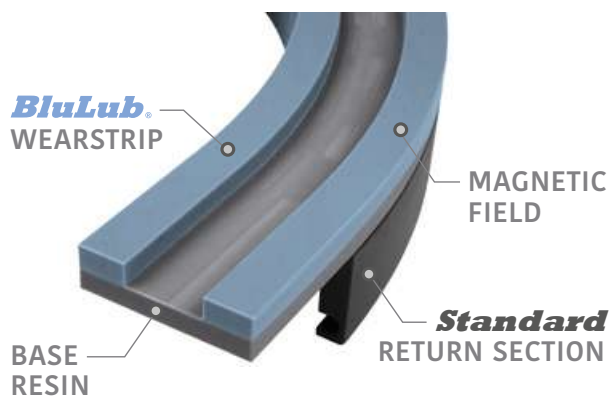

RS® Curves

SPECIFIC FOR HIGH LOAD APPLICATIONS

RS magnetic curves are designed to offer better conveyor performance.

RS curves equipped with **BluLub®** inserts require less energy consumption and reach a lower coefficient of friction which improves the product stability and elongate the wear life of chains and belts.

The curves **RS** are perfectly interchangeable with the traditional versions.

Depending on application conditions various curve materials are suitable.

Movex RS PRO



SUPER RS MAGNETIC CURVE

PATENTED

A new concept of Magnetic curve.

RS PRO is a patented system that consists of machined plastic curve tracks equipped with permanent magnets with a new curve return concept. This new return section-plate provides a total support of the chain or belt in the return of the curve.

RS PRO is equipped with wear-strips in **BluLub**, which contributes to improved PV-properties and reduce the energy consumption especially in applications with limited lubrication or higher loads.

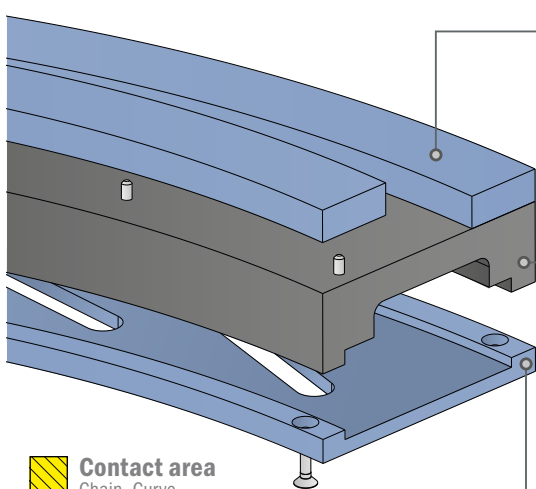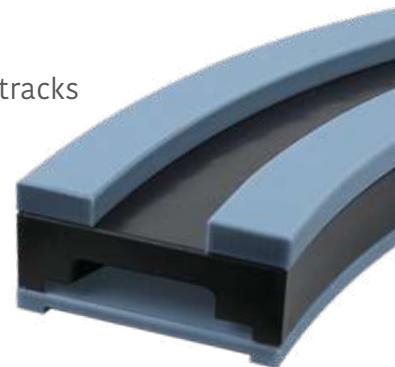

Wear strip made in **BluLub**

The assembly system reduces the maintenance-time in case of replacement and **BluLub** material guarantees great performance and due the lower friction which also improves the product stability and wearlife of chains and belts.

Return section made in **Standard UHMW-PE**

The return section of the **RS PRO** curve is designed to reduce the distance between chain and magnets; ensuring steady magnetic force and keeping the chain in the correct position.

New support plate made in **BluLub**



The new return-section plate creates a full support of the chain or belt in this return-section.

RS PRO patented curves can be used for **880 M** chain as well as **260 M** chain-belt.

Depending on the installation of the return-section plate, the correct space is created in the return.

Basically, two executions in one design!

 **Contact area**
Chain- Curve



• Lower Friction • Less Wear • Easy to maintain • Lower TCO • Less Energy • Easy to install


NEW **RS CRATES**

Specific for high load applications.

RS CRATES is the perfect solution for all the applications but specific abrasive conditions, able to guarantee great functionality even under high working load.

Also available in **C Abrasive** Version.



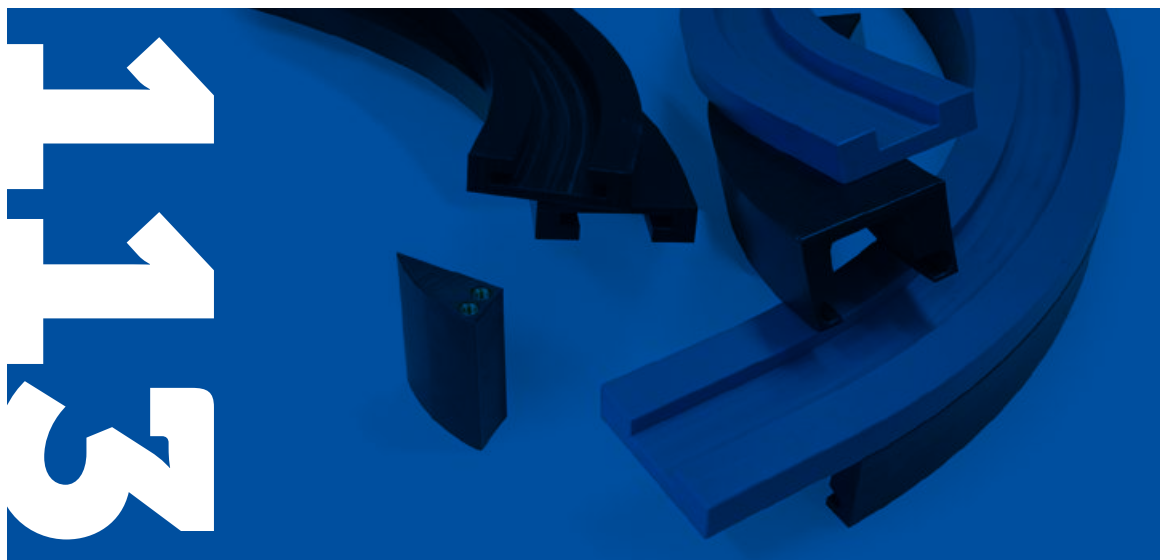

RS PRO

Series

_____ Pag 115

879-880-881

M6 Series

_____ Pag 116

M7 Series

_____ Pag 117

M10 Series

_____ Pag 118

M4 Series

_____ Pag 119

M1 Series

_____ Pag 120

M5 A/C/D Series

_____ Pag 121

M8 Series

_____ Pag 122

M42 Series

_____ Pag 123

M9 Series

_____ Pag 124

M43 Series

_____ Pag 125

M21A Series

K450 Pag 126

M22A Series

K450 Pag 127

M27 Series

K450 Pag 128

M61 Series

K750 Pag 129

M62/66/65 Series

K750 Pag 130

882-8857

M81 Series

K750 Pag 131

M85 Series

K750 Pag 132

M86 Series

K750 Pag 133

M80 Series

K750 Pag 134

882 M

M93/M94 Series

K1000 Pag 135

M97/M98 Series

K1200 Pag 136

882 LBP

MP861 Series

K750 Pag 137

MP931/MP941 Series

K1000 Pag 138

MP91 Series

K1000 Pag 139

MP971/MP981 Series

K1200 Pag 140

260 M

MB7 Series

_____ Pag 141

MB6 Series

_____ Pag 142

MB4 Series

_____ Pag 143

MB8 Series

_____ Pag 144

MB5D Series

_____ Pag 145

MB22 Series

K450 Pag 146

MB27 Series

K450 Pag 147

261 M

MC7 Series

_____ Pag 148

MC6 Series

_____ Pag 149

MC4 Series

_____ Pag 150

MC8 Series

_____ Pag 151

MCD5 Series

_____ Pag 152

MC22 Series

K450 Pag 153

MC27 Series

K450 Pag 154

520 M

MA7 Series

_____ Pag 155

MA6 Series

_____ Pag 156

MA4 Series

_____ Pag 157

MA8 Series

_____ Pag 158

MA42 Series

_____ Pag 159

MA43 Series

_____ Pag 160

MA5D Series

_____ Pag 161

550 PRO M

Series

_____ Pag 162

Magnetic, Tab & Bevel corner tracks

Material
Info:



pg. 111

TAB Version

878-879-880-881-888-260-261 TAB

_____ Pag 163

878 TAB-880 TAB BO

_____ Pag 164

888 TAB

_____ Pag 165

882 TAB

_____ Pag 166

1873-1874 TAB

_____ Pag 167

1843 TAB

_____ Pag 168

1701 TAB-1706 TAB

_____ Pag 169

Bevel Version

880-881-8811 B

_____ Pag 174

Straight section

878-879-880-881-888-260-261 TAB

_____ Pag 175

882 TAB

_____ Pag 175

1873-1874 TAB

_____ Pag 176

1843 TAB

_____ Pag 176

1701 TAB-1706 TAB

_____ Pag 177

600 Series

Standard and Small radius

_____ Pag 170

Standard and Small radius - TAB Version

_____ Pag 171

Heavy duty and Heavy duty/Small radius

_____ Pag 172

With Bearings

_____ Pag 173



RS PRO


PATENTED

Chain Reference	879 M - K325	880 M - K325	880 M - K330	881 M - K325	881 M - K330	260 M - K330	Delivery:	Easy	Standard
-----------------	--------------	--------------	--------------	--------------	--------------	--------------	-----------	------	----------

Curva Larghezza Base = 111 mm

Curve Basic Width = 111 mm



Kurve Basisbreite = 111 mm

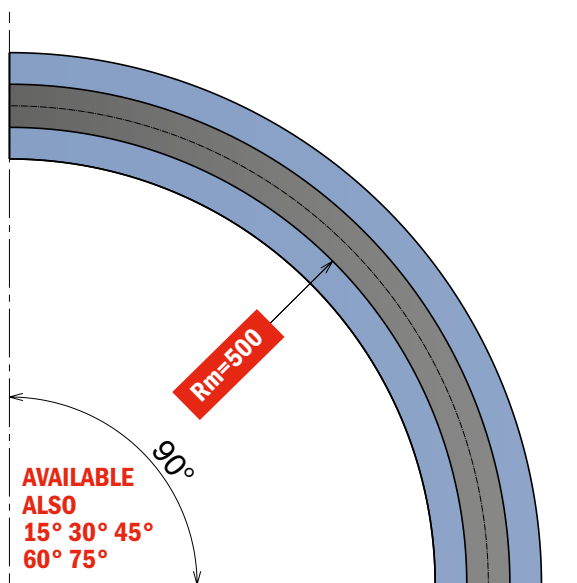


IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm



Available in
BluLub®

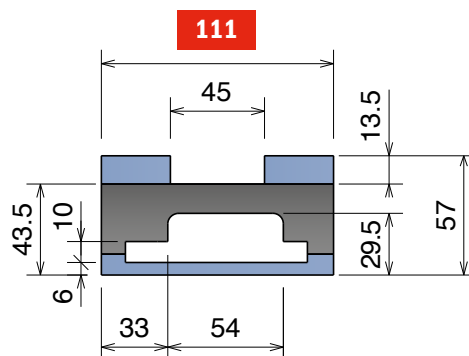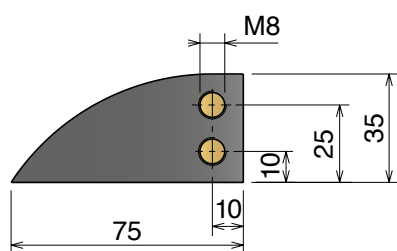

SINGLE TRACK for 260 M

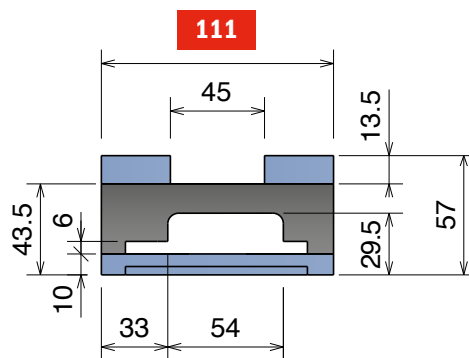

SINGLE TRACK for 880 M

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
712	71211610RSPRO	1	111	




RS PRO
 CURVE


On request available
 with different radius.

RS PRO


ONE curve, FOUR chains!




879 M



880 M



881 M



260 M


879-880-881 M6 Series

Chain Reference	879 M - K325	880 M - K325	880 M - K330	881 M - K325	881 M - K330	Delivery:	Easy	Standard
-----------------	--------------	--------------	--------------	--------------	--------------	-----------	------	----------

Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm



Kurve Basisbreite = 100 mm; Teilung = 85 mm

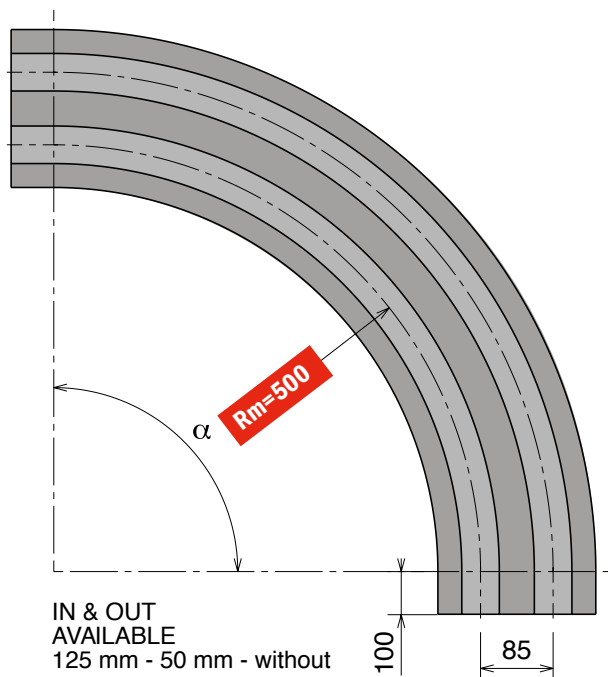


IN & OUT
AVAILABLE
125 mm - 50 mm - without



Available in
BluLub®

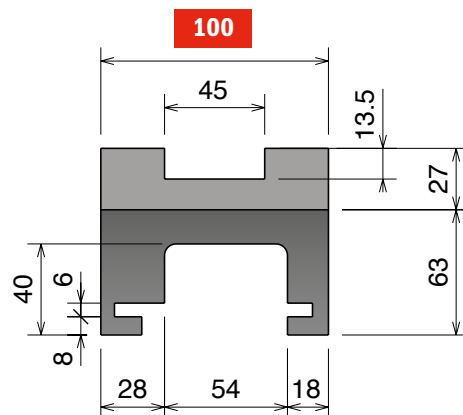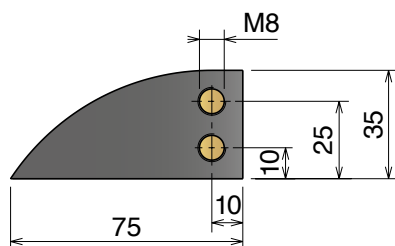

SINGLE TRACK

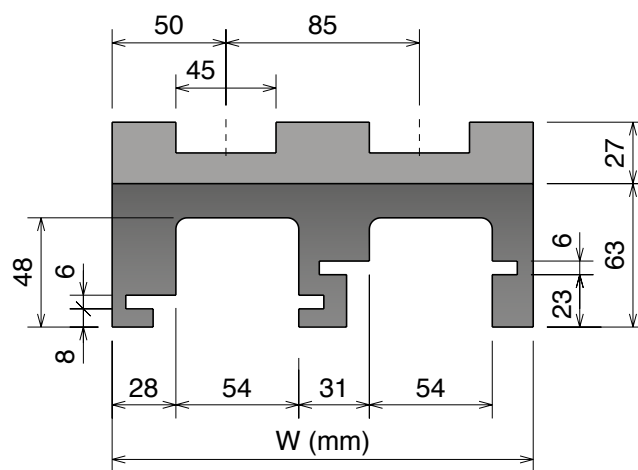

MULTI TRACK

MAGNETIC SYSTEM

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
701	70111114	70111214	70111314	70111414	70111514	70111614	1	100	Standard codes on table
701	70111124	70111224	70111324	70111424	70111524	70111624	2	185	
701	70111134	70111234	70111334	70111434	70111534	70111634	3	270	add "B" for BluLub®
701	70111144	70111244	70111344	70111444	70111544	70111644	4	355	
701	70111154	70111254	70111354	70111454	70111554	70111654	5	440	add "C" for abrasive
701	70111164	70111264	70111364	70111464	70111564	70111664	6	525	
701	70111174	70111274	70111374	70111474	70111574	70111674	7	610	add "C" for abrasive
701	70111184	70111284	70111384	70111484	70111584	70111684	8	695	

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
701	70111114RS	70111214RS	70111314RS	70111414RS	70111514RS	70111614RS	1	100	RS add "RS" for RS-version
701	70111124RS	70111224RS	70111324RS	70111424RS	70111524RS	70111624RS	2	185	
701	70111134RS	70111234RS	70111334RS	70111434RS	70111534RS	70111634RS	3	270	RS add "RS" for RS-version
701	70111144RS	70111244RS	70111344RS	70111444RS	70111544RS	70111644RS	4	355	
701	70111154RS	70111254RS	70111354RS	70111454RS	70111554RS	70111654RS	5	440	RS add "RS" for RS-version
701	70111164RS	70111264RS	70111364RS	70111464RS	70111564RS	70111664RS	6	525	
701	70111174RS	70111274RS	70111374RS	70111474RS	70111574RS	70111674RS	7	610	RS add "RS" for RS-version
701	70111184RS	70111284RS	70111384RS	70111484RS	70111584RS	70111684RS	8	695	


879-880-881 M7 Series

Chain Reference	879 M - K325	880 M - K325	880 M - K330	881 M - K325	881 M - K330
-----------------	--------------	--------------	--------------	--------------	--------------

Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm



Kurve Basisbreite = 100 mm; Teilung = 85 mm

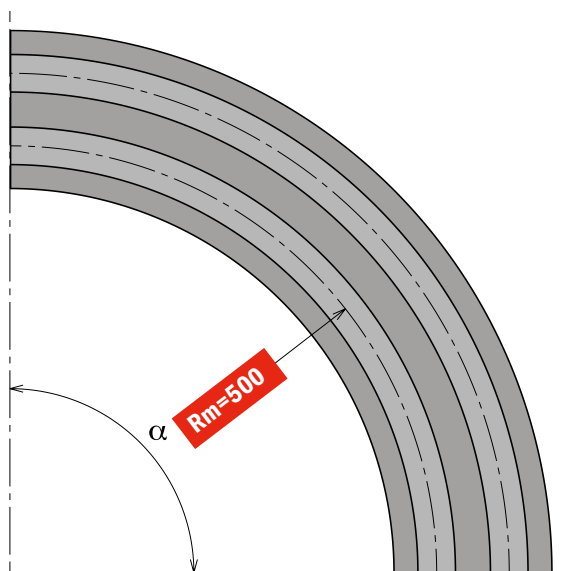


IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm



Available in
BluLub®

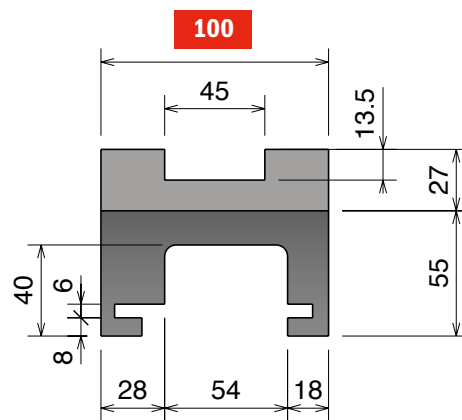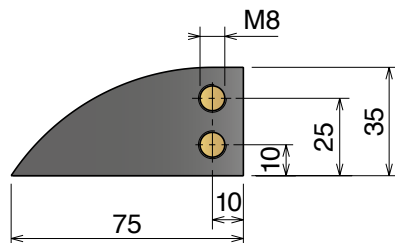

SINGLE TRACK

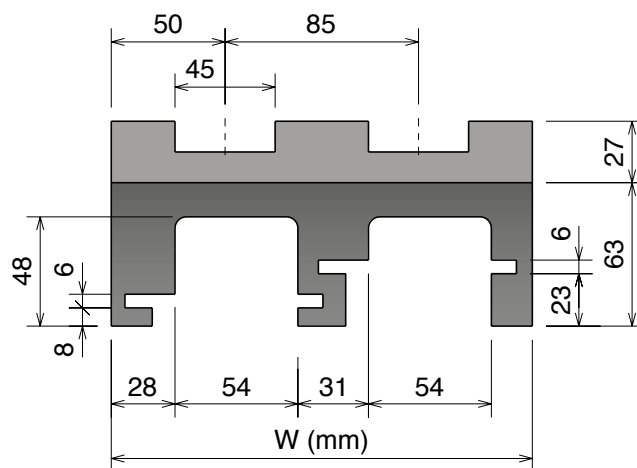

MULTI TRACK

MAGNETIC SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
701	70111110	70111210	70111310	70111410	70111510	70111610	1	100	 Standard codes on table
701	70111120	70111220	70111320	70111420	70111520	70111620	2	185	
701	70111130	70111230	70111330	70111430	70111530	70111630	3	270	
701	70111140	70111240	70111340	70111440	70111540	70111640	4	355	 add "B" for BluLub®
701	70111150	70111250	70111350	70111450	70111550	70111650	5	440	
701	70111160	70111260	70111360	70111460	70111560	70111660	6	525	
701	70111170	70111270	70111370	70111470	70111570	70111670	7	610	 add "C" for abrasive
701	70111180	70111280	70111380	70111480	70111580	70111680	8	695	

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
701	70111110RS	70111210RS	70111310RS	70111410RS	70111510RS	70111610RS	1	100	 RS add "RS" for RS-version
701	70111120RS	70111220RS	70111320RS	70111420RS	70111520RS	70111620RS	2	185	
701	70111130RS	70111230RS	70111330RS	70111430RS	70111530RS	70111630RS	3	270	
701	70111140RS	70111240RS	70111340RS	70111440RS	70111540RS	70111640RS	4	355	
701	70111150RS	70111250RS	70111350RS	70111450RS	70111550RS	70111650RS	5	440	
701	70111160RS	70111260RS	70111360RS	70111460RS	70111560RS	70111660RS	6	525	
701	70111170RS	70111270RS	70111370RS	70111470RS	70111570RS	70111670RS	7	610	
701	70111180RS	70111280RS	70111380RS	70111480RS	70111580RS	70111680RS	8	695	


879-880-881 M10 Series

Chain Reference 879 M - K325 880 M - K325 880 M - K330 881 M - K325 881 M - K330



Curva Larghezza Base = 110 mm; Passo = 85 mm

Curve Basic Width = 110 mm; Pitch = 85 mm


Kurve Basisbreite = 110 mm; Teilung = 85 mm

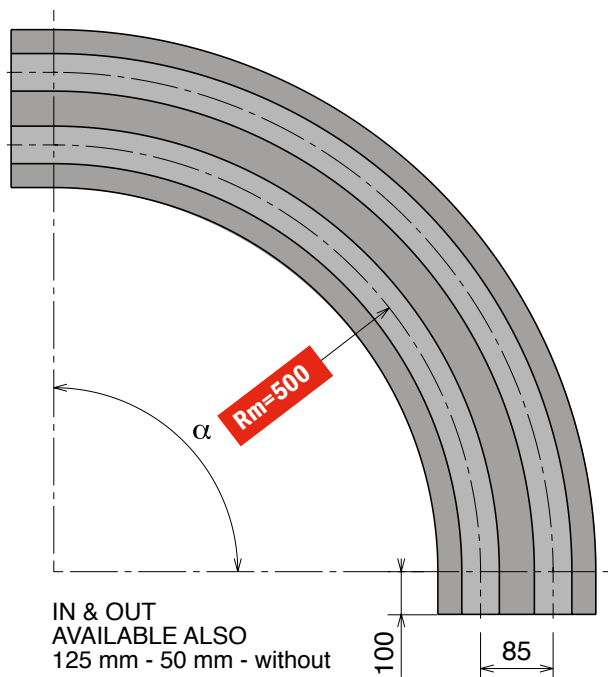

Available in
BluLub®

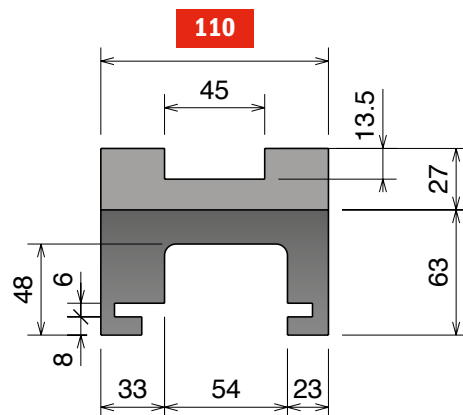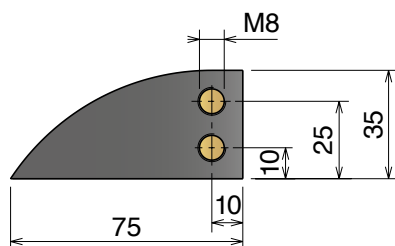

SINGLE TRACK

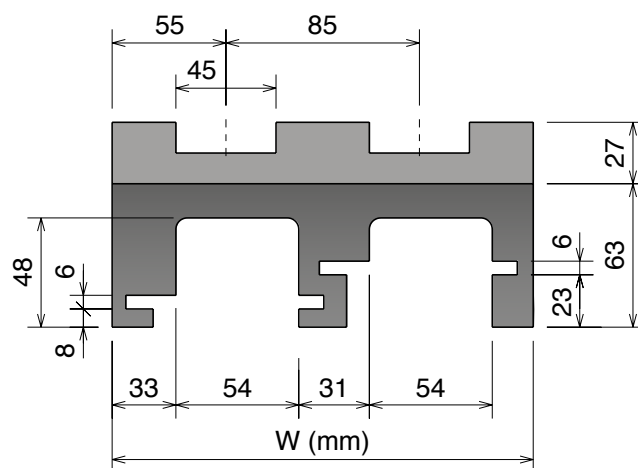

MULTI TRACK

MAGNETIC SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
711	71111114	71111214	71111314	71111414	71111514	71111614	1	110	 Standard codes on table
711	71111124	71111224	71111324	71111424	71111524	71111624	2	195	
711	71111134	71111234	71111334	71111434	71111534	71111634	3	280	
711	71111144	71111244	71111344	71111444	71111544	71111644	4	365	
711	71111154	71111254	71111354	71111454	71111554	71111654	5	450	 add " B " for BluLub®
711	71111164	71111264	71111364	71111464	71111564	71111664	6	535	
711	71111174	71111274	71111374	71111474	71111574	71111674	7	620	
711	71111184	71111284	71111384	71111484	71111584	71111684	8	705	

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
711	71111114RS	71111214RS	71111314RS	71111414RS	71111514RS	71111614RS	1	110	 RS add " RS " for RS-version
711	71111124RS	71111224RS	71111324RS	71111424RS	71111524RS	71111624RS	2	195	
711	71111134RS	71111234RS	71111334RS	71111434RS	71111534RS	71111634RS	3	280	
711	71111144RS	71111244RS	71111344RS	71111444RS	71111544RS	71111644RS	4	365	
711	71111154RS	71111254RS	71111354RS	71111454RS	71111554RS	71111654RS	5	450	
711	71111164RS	71111264RS	71111364RS	71111464RS	71111564RS	71111664RS	6	535	
711	71111174RS	71111274RS	71111374RS	71111474RS	71111574RS	71111674RS	7	620	
711	71111184RS	71111284RS	71111384RS	71111484RS	71111584RS	71111684RS	8	705	


879-880-881 M4 Series

Chain Reference	879 M - K325	880 M - K325	880 M - K330	881 M - K325	881 M - K330
-----------------	--------------	--------------	--------------	--------------	--------------

Curva Larghezza Base = 111 mm; Passo = 85 mm

Curve Basic Width = 111 mm; Pitch = 85 mm



Kurve Basisbreite = 111 mm; Teilung = 85 mm

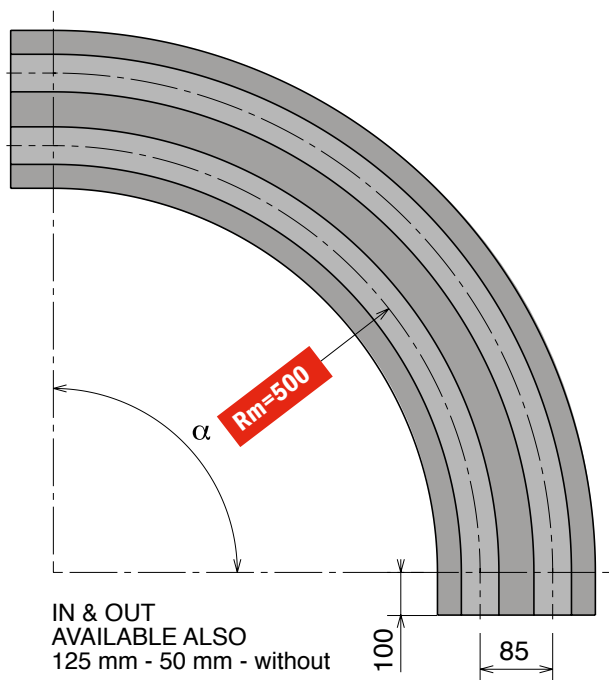


IN & OUT
 AVAILABLE ALSO
 125 mm - 50 mm - without



Available in
BluLub®

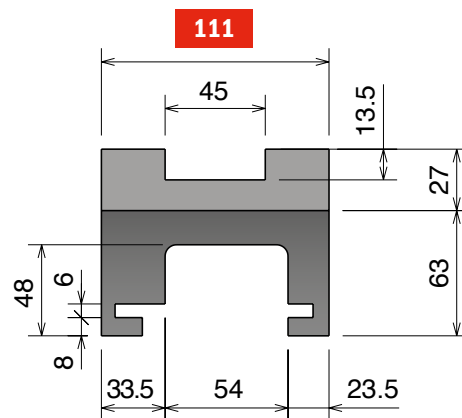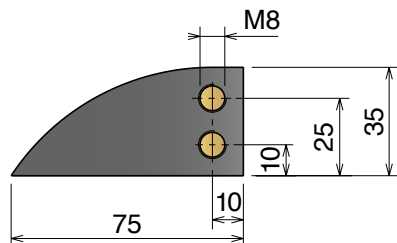

SINGLE TRACK

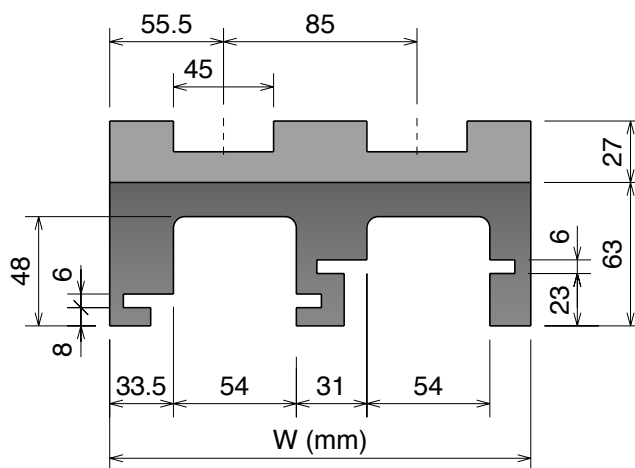

MULTI TRACK

MAGNETIC SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
712	71211114	71211214	71211314	71211414	71211514	71211614	1	111	Standard codes on table
712	71211124	71211224	71211324	71211424	71211524	71211624	2	196	
712	71211134	71211234	71211334	71211434	71211534	71211634	3	281	add "B" for BluLub®
712	71211144	71211244	71211344	71211444	71211544	71211644	4	366	
712	71211154	71211254	71211354	71211454	71211554	71211654	5	451	add "C" for abrasive
712	71211164	71211264	71211364	71211464	71211564	71211664	6	536	
712	71211174	71211274	71211374	71211474	71211574	71211674	7	621	add "C" for abrasive
712	71211184	71211284	71211384	71211484	71211584	71211684	8	706	

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
712	71211114RS	71211214RS	71211314RS	71211414RS	71211514RS	71211614RS	1	111	RS add "RS" for RS-version
712	71211124RS	71211224RS	71211324RS	71211424RS	71211524RS	71211624RS	2	196	
712	71211134RS	71211234RS	71211334RS	71211434RS	71211534RS	71211634RS	3	281	RS add "RS" for RS-version
712	71211144RS	71211244RS	71211344RS	71211444RS	71211544RS	71211644RS	4	366	
712	71211154RS	71211254RS	71211354RS	71211454RS	71211554RS	71211654RS	5	451	RS add "RS" for RS-version
712	71211164RS	71211264RS	71211364RS	71211464RS	71211564RS	71211664RS	6	536	
712	71211174RS	71211274RS	71211374RS	71211474RS	71211574RS	71211674RS	7	621	RS add "RS" for RS-version
712	71211184RS	71211284RS	71211384RS	71211484RS	71211584RS	71211684RS	8	706	


879-880-881 M1 Series

Chain Reference 879 M - K325 880 M - K325 880 M - K330 881 M - K325 881 M - K330



Curva Larghezza Base = 100 mm; Passo = 89 mm

Curve Basic Width = 100 mm; Pitch = 89 mm


Kurve Basisbreite = 100 mm; Teilung = 89 mm

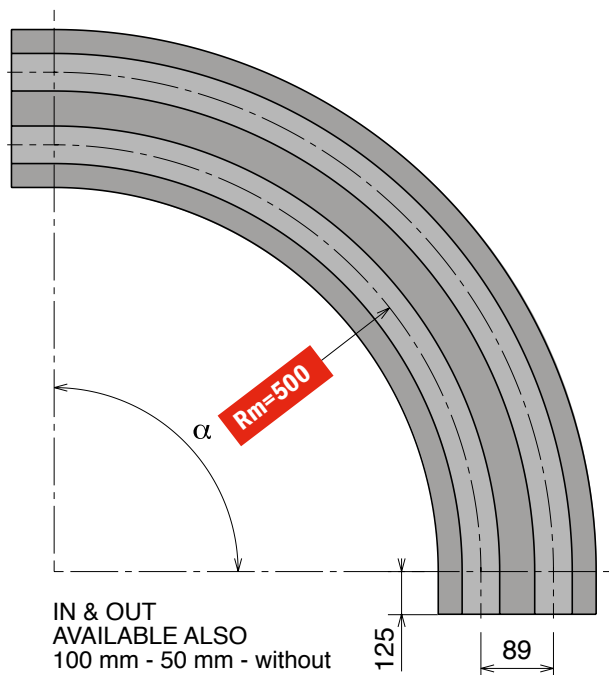

Available in
BluLub®

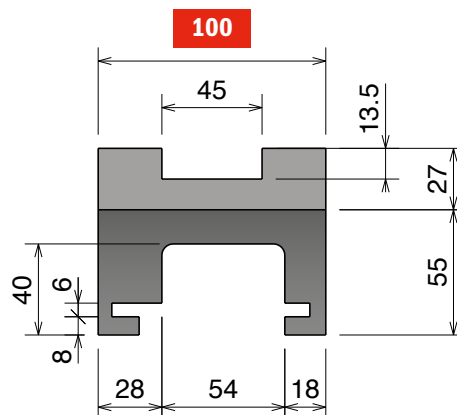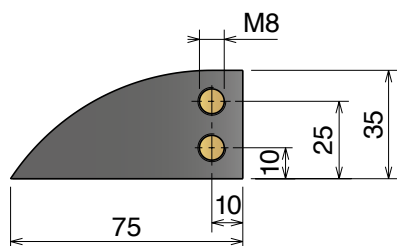

SINGLE TRACK

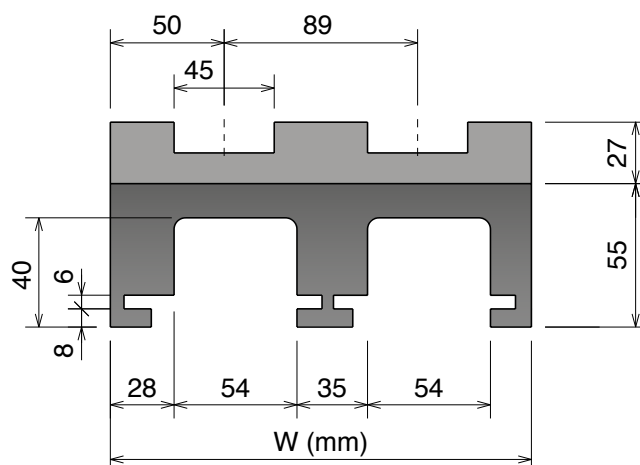

MULTI TRACK

MAGNETIC SYSTEM

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
730	73011115	73011215	73011315	73011415	73011515	73011615	1	100	Standard codes on table
730	73011125	73011225	73011325	73011425	73011525	73011625	2	189	
730	73011135	73011235	73011335	73011435	73011535	73011635	3	278	
730	73011145	73011245	73011345	73011445	73011545	73011645	4	367	add "B" for BluLub®
730	73011155	73011255	73011355	73011455	73011555	73011655	5	456	
730	73011165	73011265	73011365	73011465	73011565	73011665	6	545	
730	73011175	73011275	73011375	73011475	73011575	73011675	7	634	add "C" for abrasive
730	73011185	73011285	73011385	73011485	73011585	73011685	8	723	

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
730	73011115RS	73011215RS	73011315RS	73011415RS	73011515RS	73011615RS	1	100	RS add "RS" for RS-version
730	73011125RS	73011225RS	73011325RS	73011425RS	73011525RS	73011625RS	2	189	
730	73011135RS	73011235RS	73011335RS	73011435RS	73011535RS	73011635RS	3	278	
730	73011145RS	73011245RS	73011345RS	73011445RS	73011545RS	73011645RS	4	367	
730	73011155RS	73011255RS	73011355RS	73011455RS	73011555RS	73011655RS	5	456	
730	73011165RS	73011265RS	73011365RS	73011465RS	73011565RS	73011665RS	6	545	
730	73011175RS	73011275RS	73011375RS	73011475RS	73011575RS	73011675RS	7	634	
730	73011185RS	73011285RS	73011385RS	73011485RS	73011585RS	73011685RS	8	723	


879-880-881 M5 A/C/D Series

Chain Reference	879 M - K325	880 M - K325	880 M - K330	881 M - K325	881 M - K330
-----------------	--------------	--------------	--------------	--------------	--------------


Curva Larghezza Base = 100 mm

Curve Basic Width = 100 mm


Kurve Basisbreite = 100 mm

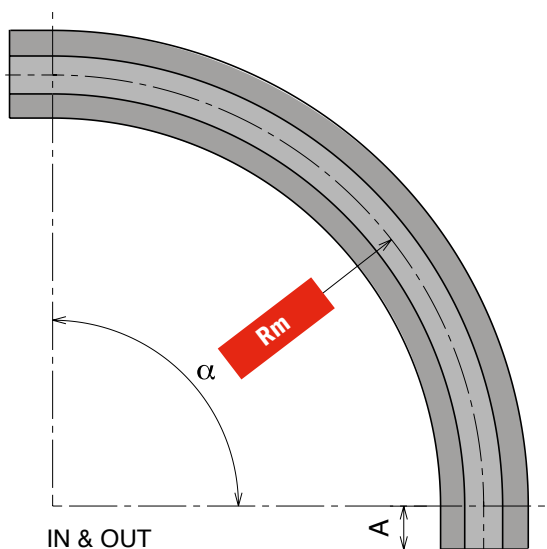

IN & OUT
 AVAILABLE ALSO
 100 mm - 50 mm - without

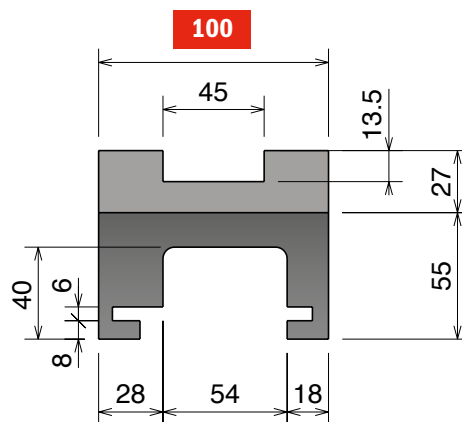

Available in
BluLub®

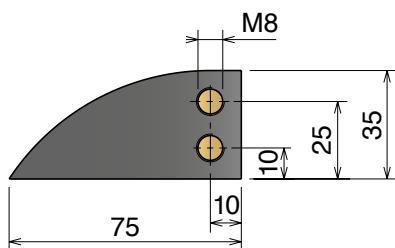

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

M5A Series - Rm 680

MAGNETIC SYSTEM

Part	$\alpha 15^\circ$	$\alpha 30^\circ$	$\alpha 45^\circ$	$\alpha 60^\circ$	$\alpha 75^\circ$	$\alpha 90^\circ$		Tracks	W	A
703	70315114	70315214	70315314	70315414	70315514	70315614		1	100	100
Material	Standard codes on table			add "B" for BluLub®		add "C" for abrasive		add "RS" for RS -version		

M5C Series - Rm 860

Part	$\alpha 15^\circ$	$\alpha 30^\circ$	$\alpha 45^\circ$	$\alpha 60^\circ$	$\alpha 75^\circ$	$\alpha 90^\circ$		Tracks	W	A
703	70318115	70318215	70318315	70318415	70318515	70318615		1	100	125
Material	Standard codes on table			add "B" for BluLub®		add "C" for abrasive		add "RS" for RS -version		

M5D Series - Rm 1000

Part	$\alpha 15^\circ$	$\alpha 30^\circ$	$\alpha 45^\circ$	$\alpha 60^\circ$	$\alpha 75^\circ$	$\alpha 90^\circ$		Tracks	W	A
703	70319110	70319210	70319310	70319410	70319510	70319610		1	100	0
Material	Standard codes on table			add "B" for BluLub®		add "C" for abrasive		add "RS" for RS -version		

879-880-881 M8 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

879-880-881 M8 Series

Chain Reference

879 M - K325

880 M - K325

880 M - K330


881 M - K325

881 M - K330



Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm


Kurve Basisbreite = 100 mm; Teilung = 85 mm

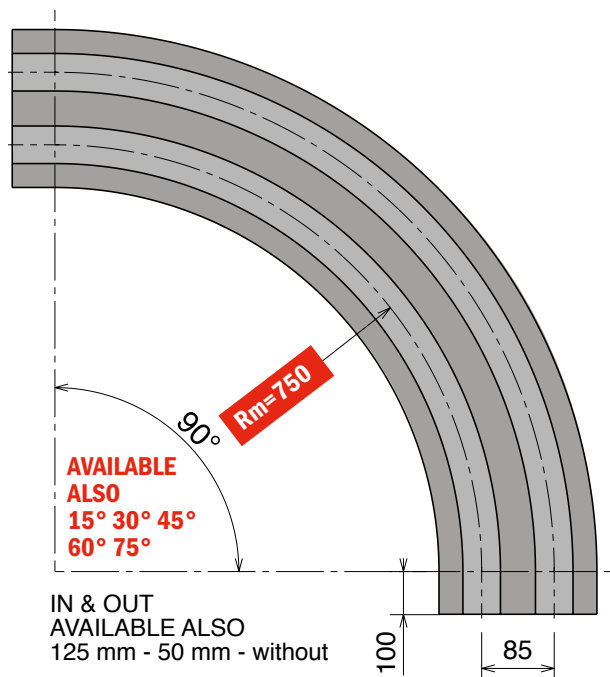

Available in
BluLub®

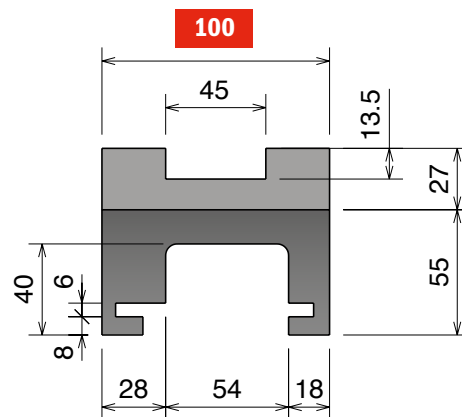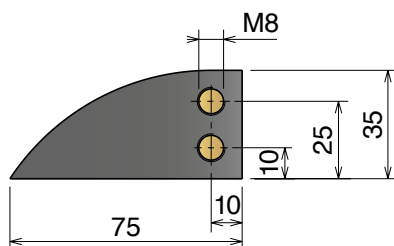

SINGLE TRACK

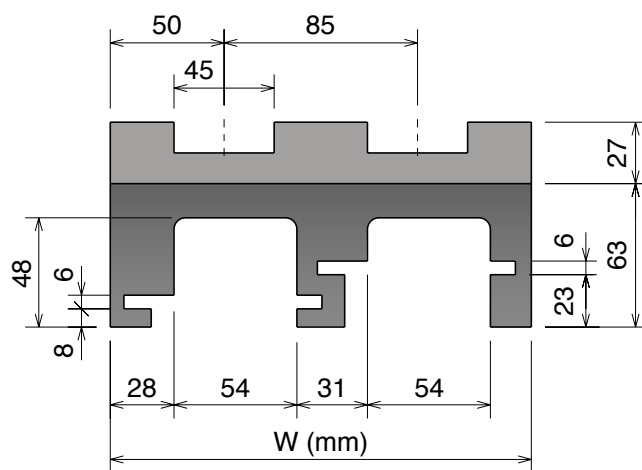

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
702	70216614	1	100	Standard codes on table
702	70216624	2	185	
702	70216634	3	270	
702	70216644	4	355	add "B" for BluLub®
702	70216654	5	440	
702	70216664	6	525	
702	70216674	7	610	add "C" for abrasive
702	70216684	8	695	

Part	Article-Nr.	Tracks	W	Material
702	70216614RS	1	100	RS add "RS" for RS-version
702	70216624RS	2	185	
702	70216634RS	3	270	
702	70216644RS	4	355	
702	70216654RS	5	440	
702	70216664RS	6	525	
702	70216674RS	7	610	
702	70216684RS	8	695	

Movex®


879-880-881 M42 Series

Chain Reference	879 M - K325	880 M - K325	880 M - K330	881 M - K325	881 M - K330
-----------------	--------------	--------------	--------------	--------------	--------------



Curva Larghezza Base = 111 mm; Passo = 85 mm

Curve Basic Width = 111 mm; Pitch = 85 mm


Kurve Basisbreite = 111 mm; Teilung = 85 mm

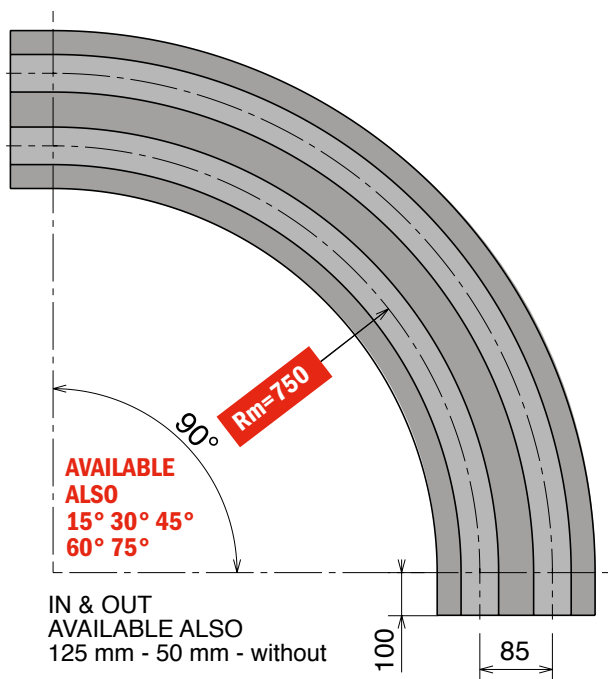

Available in
BluLub®

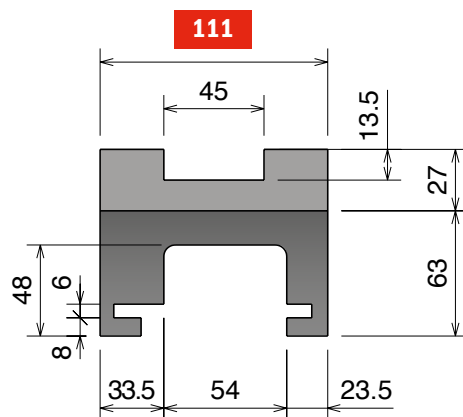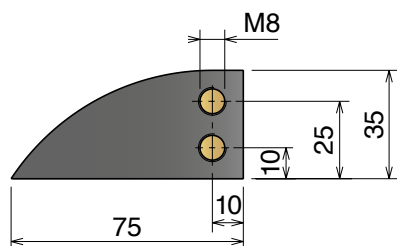

SINGLE TRACK

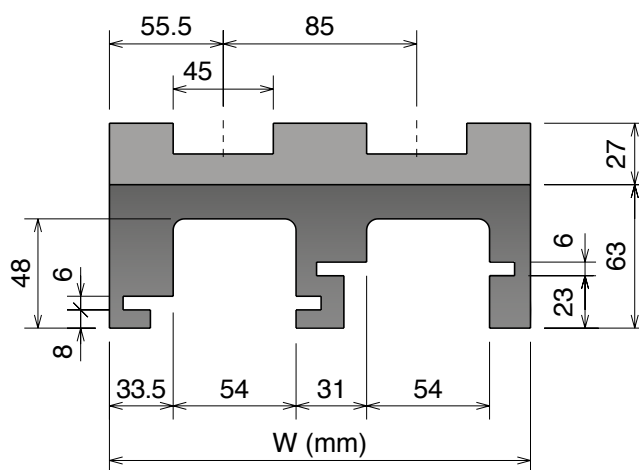

MULTI TRACK

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
713	71316614	1	111	Standard codes on table
713	71316624	2	196	
713	71316634	3	281	add "B" for BluLub®
713	71316644	4	366	
713	71316654	5	451	add "C" for abrasive
713	71316664	6	536	
713	71316674	7	621	
713	71316684	8	706	

Part	Article-Nr.	Tracks	W	Material
713	71316614RS	1	111	RS add "RS" for RS-version
713	71316624RS	2	196	
713	71316634RS	3	281	
713	71316644RS	4	366	
713	71316654RS	5	451	
713	71316664RS	6	536	
713	71316674RS	7	621	
713	71316684RS	8	706	

879-880-881 M9 Series

Chain Reference

879 M - K325

880 M - K325

880 M - K330


881 M - K325

881 M - K330



Curva Larghezza Base = 110 mm; Passo = 90 mm

Curve Basic Width = 110 mm; Pitch = 90 mm


Kurve Basisbreite = 110 mm; Teilung = 90 mm

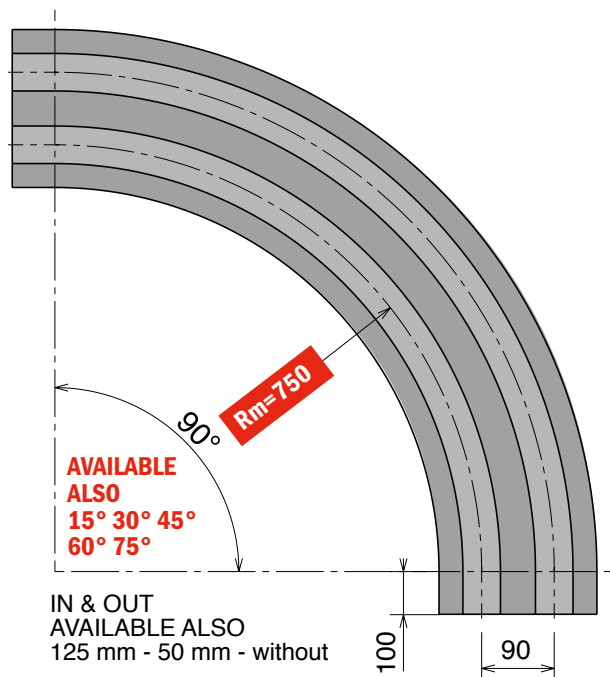

Available in
BluLub®

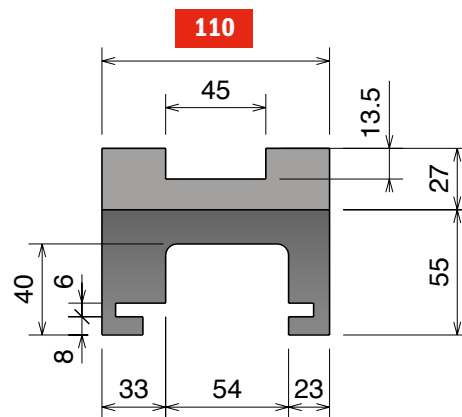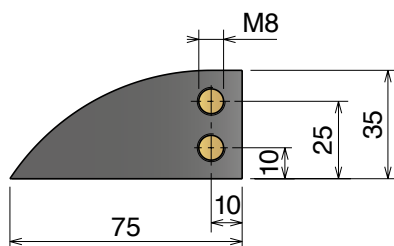

SINGLE TRACK

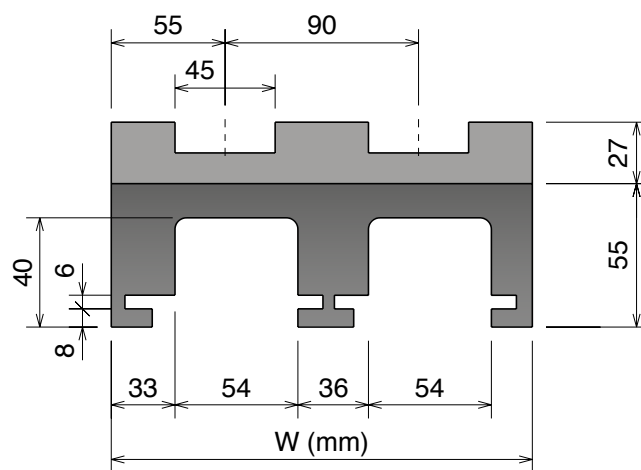

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
714	71416614	1	110	Standard codes on table
714	71416624	2	200	
714	71416634	3	290	
714	71416644	4	380	add "B" for BluLub®
714	71416654	5	470	
714	71416664	6	560	
714	71416674	7	650	add "C" for abrasive
714	71416684	8	740	

Part	Article-Nr.	Tracks	W	Material
714	71416614RS	1	110	RS add "RS" for RS-version
714	71416624RS	2	200	
714	71416634RS	3	290	
714	71416644RS	4	380	
714	71416654RS	5	470	
714	71416664RS	6	560	
714	71416674RS	7	650	
714	71416684RS	8	740	


879-880-881 M43 Series

Chain Reference	879 M - K325	880 M - K325	880 M - K330	881 M - K325	881 M - K330	Delivery:	Easy	Standard
-----------------	--------------	--------------	--------------	--------------	--------------	-----------	------	----------



Curva Larghezza Base = 111 mm; Passo = 85 mm

Curve Basic Width = 111 mm; Pitch = 85 mm


Kurve Basisbreite = 111 mm; Teilung = 85 mm

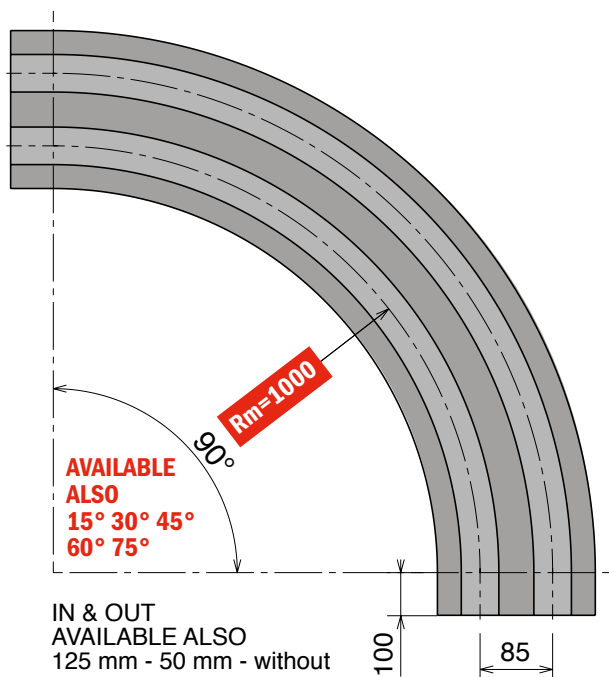

Available in
BluLub®

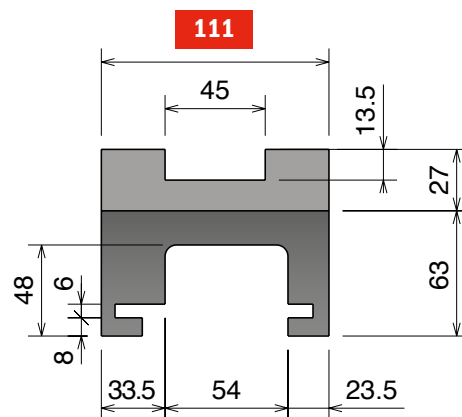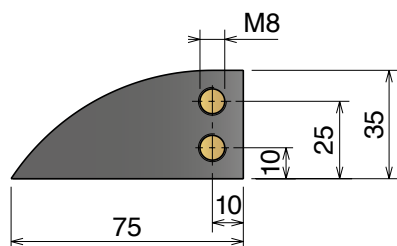

SINGLE TRACK

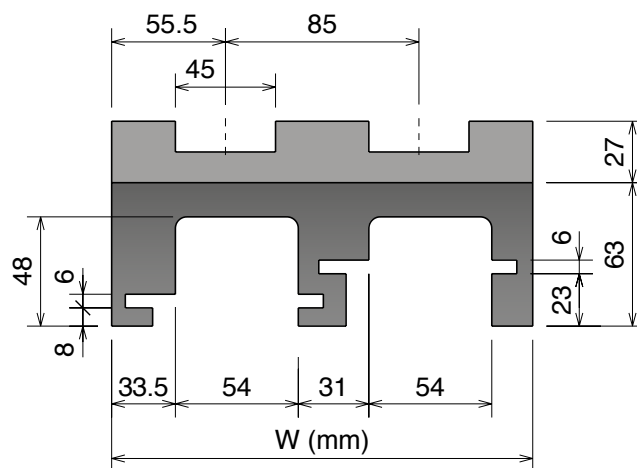

MULTI TRACK

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
712	71219614	1	111	Standard codes on table
712	71219624	2	196	
712	71219634	3	281	add "B" for BluLub®
712	71219644	4	366	
712	71219654	5	451	add "C" for abrasive
712	71219664	6	536	
712	71219674	7	621	
712	71219684	8	706	

Part	Article-Nr.	Tracks	W	Material
712	71219614RS	1	111	add "RS" for RS-version
712	71219624RS	2	196	
712	71219634RS	3	281	
712	71219644RS	4	366	
712	71219654RS	5	451	
712	71219664RS	6	536	
712	71219674RS	7	621	
712	71219684RS	8	706	

879-880-881 K450 M21A Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
Polietilene UHMW-PE
Polyethylene UHMW-PE
Polyäthylen UHMW-PE



879-880-881 K450 M21A Series

Chain Reference 879 M - K450 880 M - K450 881 M - K450


Curva Larghezza Base = 129 mm; Passo = 120 mm

Curve Basic Width = 129 mm; Pitch = 120 mm


Kurve Basisbreite = 129 mm; Teilung = 120 mm

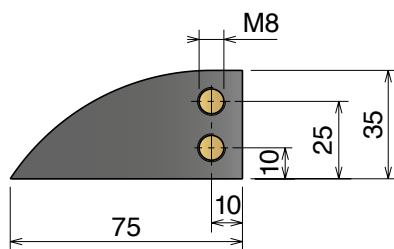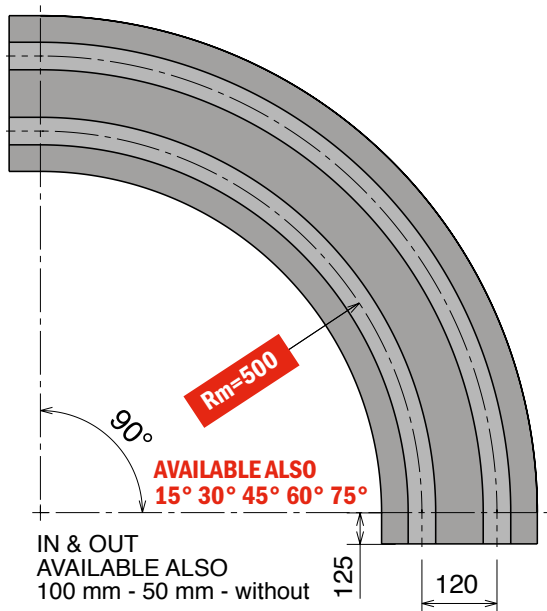

Available in
BluLub®

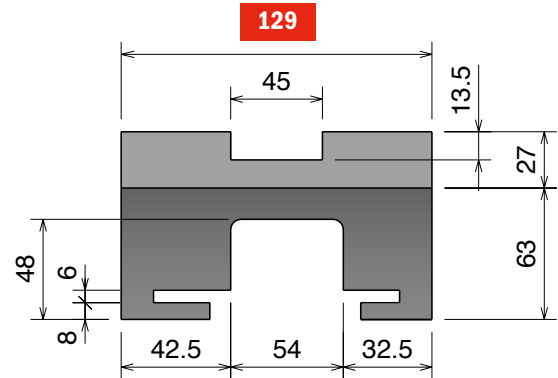

SINGLE TRACK

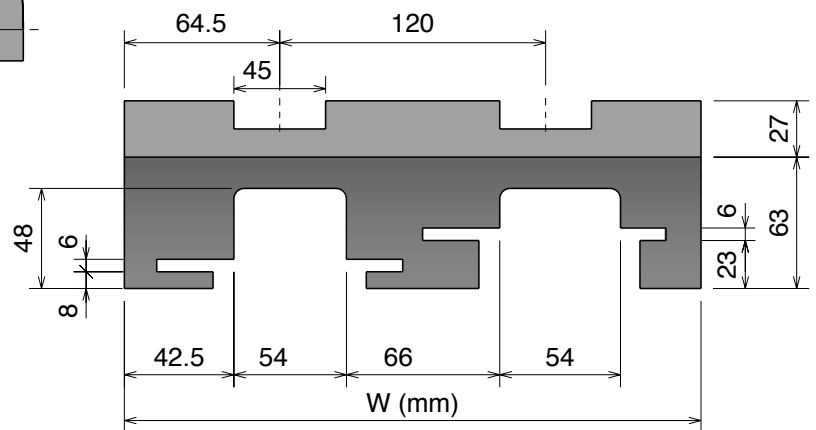

MULTI TRACK

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
715	71511615	1	129	Standard codes on table
715	71511625	2	249	
715	71511635	3	369	add "B" for BluLub®
715	71511645	4	489	
715	71511655	5	609	add "C" for abrasive

Part	Article-Nr.	Tracks	W	Material
715	71511615RS	1	129	add "RS" for RS-version
715	71511625RS	2	249	
715	71511635RS	3	369	
715	71511645RS	4	489	
715	71511655RS	5	609	



879-880-881 K450 M22A Series

Chain Reference	879 M - K450	880 M - K450	881 M - K450
-----------------	--------------	--------------	--------------


Curva Larghezza Base = 129 mm; Passo = 120 mm

Curve Basic Width = 129 mm; Pitch = 120 mm


Kurve Basisbreite = 129 mm; Teilung = 120 mm

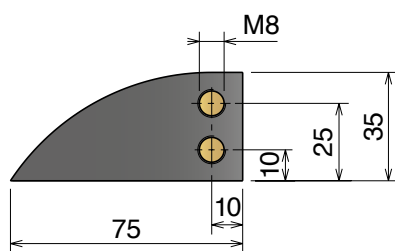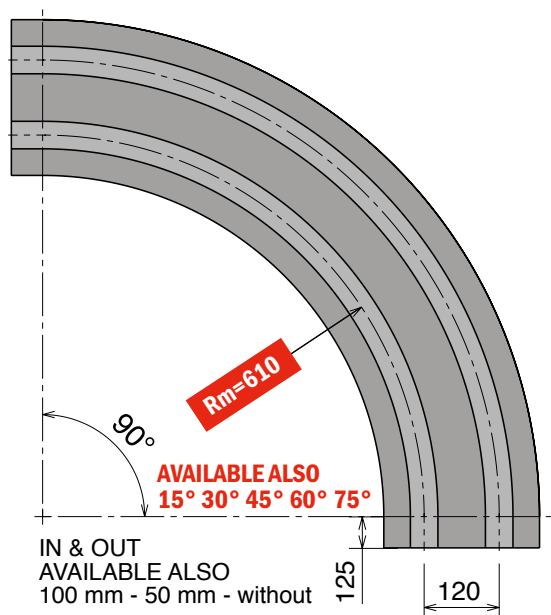

Available in
BluLub®

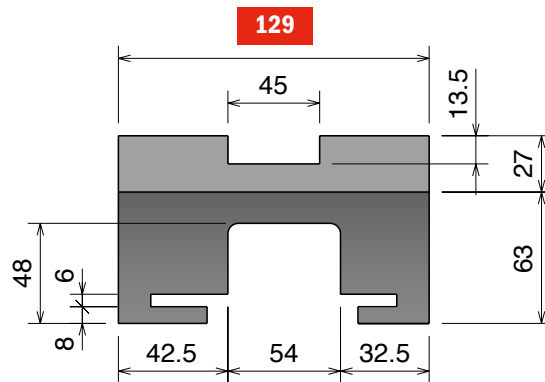

SINGLE TRACK

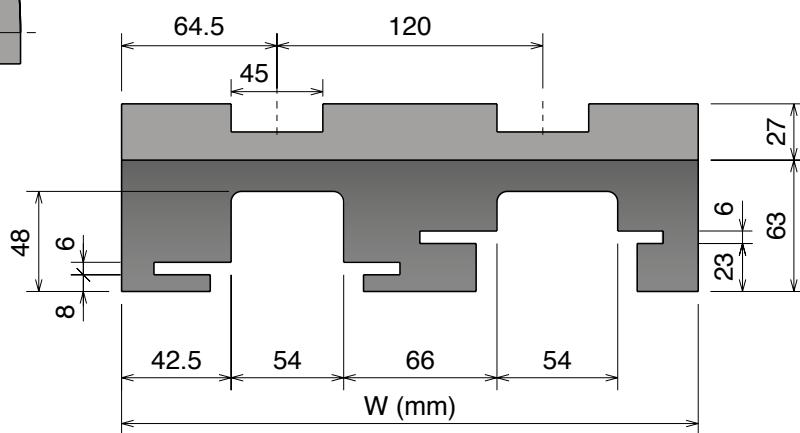

MULTI TRACK

MAGNETIC SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	Article-Nr.	Tracks	W	Material
704	70413615	1	129	 Standard codes on table
704	70413625	2	249	
704	70413635	3	369	 add "B" for BluLub®
704	70413645	4	489	
704	70413655	5	609	 add "C" for abrasive

Part	Article-Nr.	Tracks	W	Material
704	70413615RS	1	129	 RS add "RS" for RS-version
704	70413625RS	2	249	
704	70413635RS	3	369	
704	70413645RS	4	489	
704	70413655RS	5	609	

879-880-881 K450 M27 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE



879-880-881 K450 M27 Series

Chain Reference 879 M - K450 880 M - K450 881 M - K450



Curva Larghezza Base = 129 mm; Passo = 117 mm

Curve Basic Width = 129 mm; Pitch = 117 mm

Kurve Basisbreite = 129 mm; Teilung = 117 mm

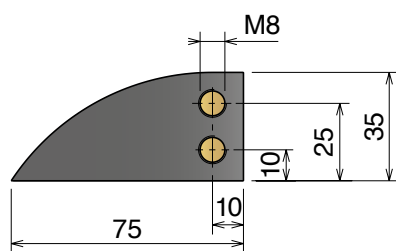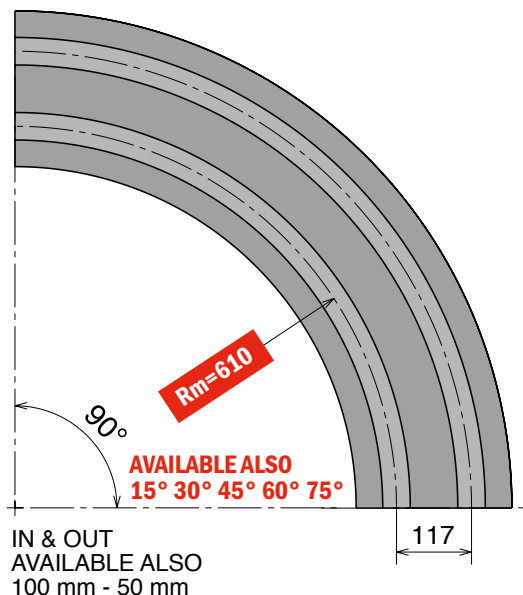

Available in
BluLub®

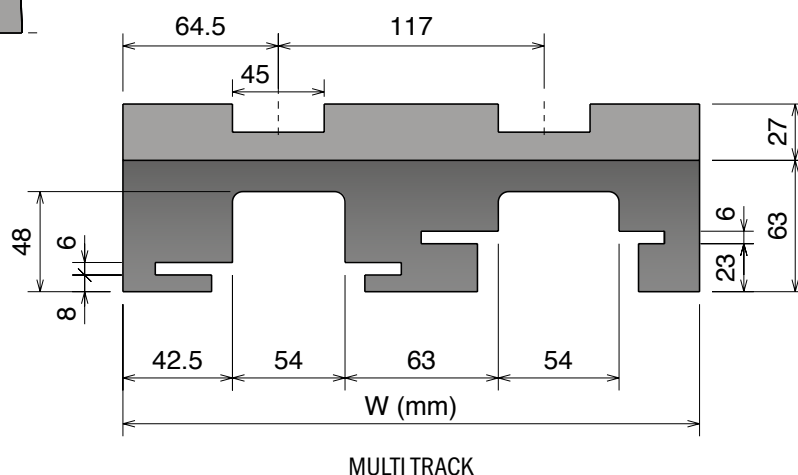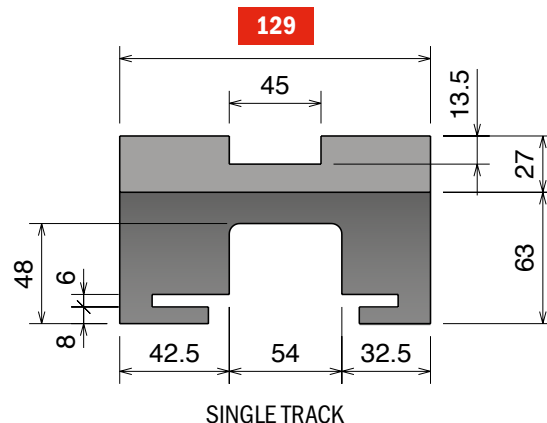

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
731	73113610	1	129	Standard codes on table
731	73113620	2	246	
731	73113630	3	363	
731	73113640	4	480	add "B" for BluLub®
731	73113650	5	597	
731	73113660	6	714	
731	73113670	7	831	add "C" for abrasive
731	73113680	8	948	

Part	Article-Nr.	Tracks	W	Material
731	73113610RS	1	129	RS add "RS" for RS-version
731	73113620RS	2	246	
731	73113630RS	3	363	
731	73113640RS	4	480	
731	73113650RS	5	597	
731	73113660RS	6	714	
731	73113670RS	7	831	
731	73113680RS	8	948	

Movex®

879-880-881 K750 M61 Series

Chain Reference


880 M - K750

881 M - K750

Curva Larghezza Base = 214 mm; Passo = 196 mm

Curve Basic Width = 214 mm; Pitch = 196 mm


Kurve Basisbreite = 214 mm; Teilung = 196 mm

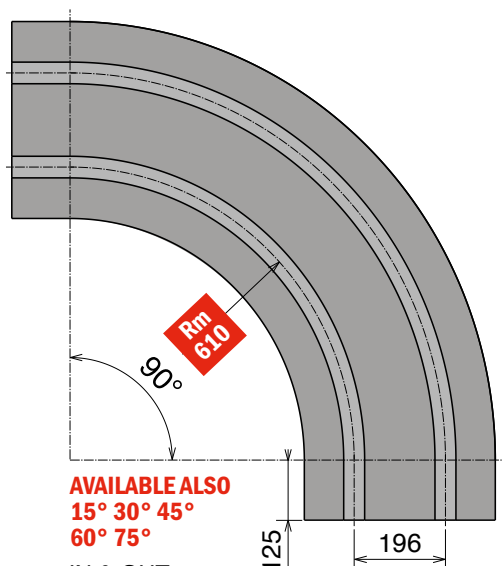


AVAILABLE ALSO

15° 30° 45°
60° 75°


IN & OUT
AVAILABLE ALSO
100 mm - 50 mm
without

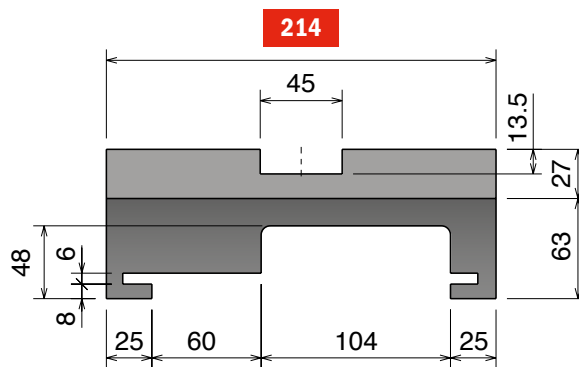

SINGLE TRACK

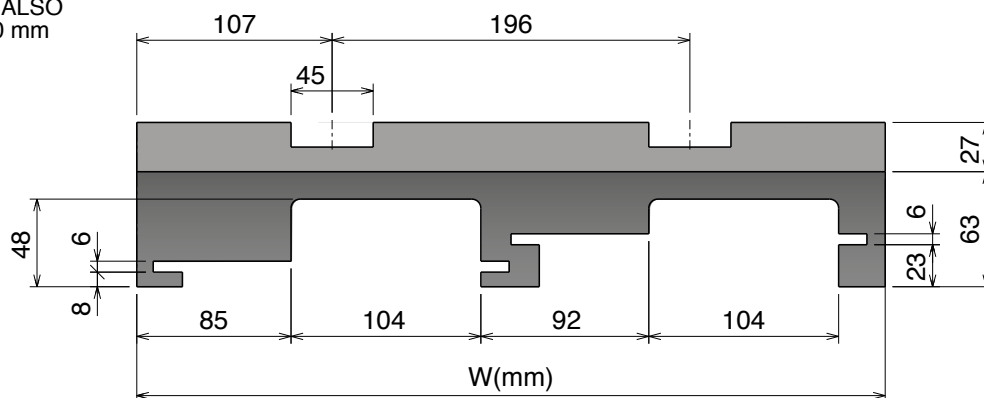

MULTI TRACK

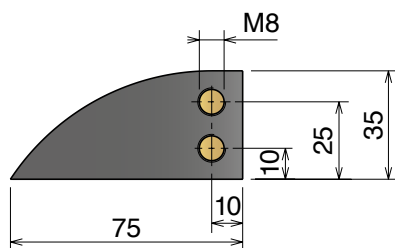

Available in
BluLub®

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
716	71613615	1	214	 Standard codes on table
716	71613625	2	410	
716	71613635	3	606	



add "B" for
BluLub®

add "C"
for abrasive

Part	Article-Nr.	Tracks	W	Material
716	71613615RS	1	214	 RS add "RS" for RS-version
716	71613625RS	2	410	
716	71613635RS	3	606	

882 K750 M81 Series


Chain Reference

882 M - K750




Curva Larghezza Base = 200 mm; Passo = 195 mm

Curve Basic Width = 200 mm; Pitch = 195 mm

Kurve Basisbreite = 200 mm; Teilung = 195 mm

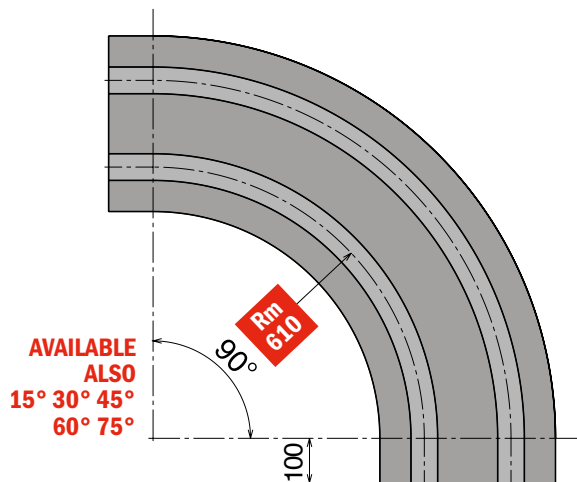

IN & OUT
 AVAILABLE ALSO
 125 mm - 50 mm - without

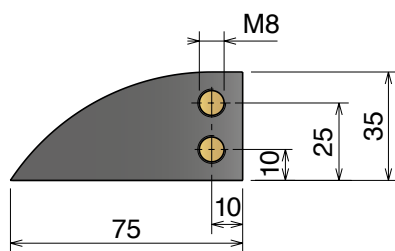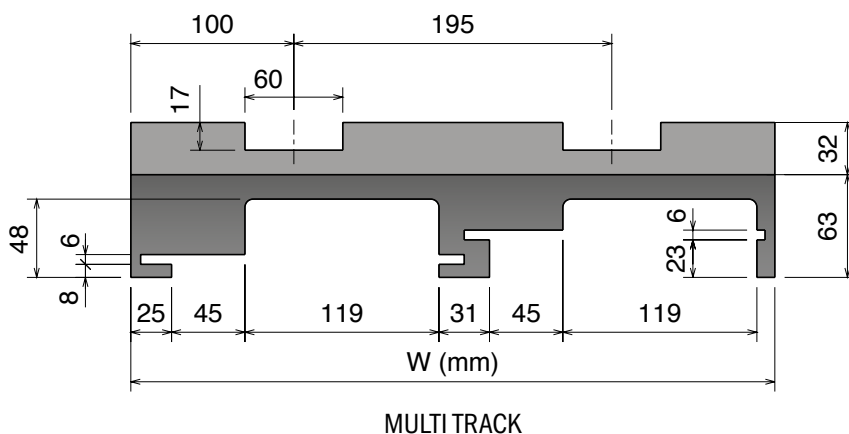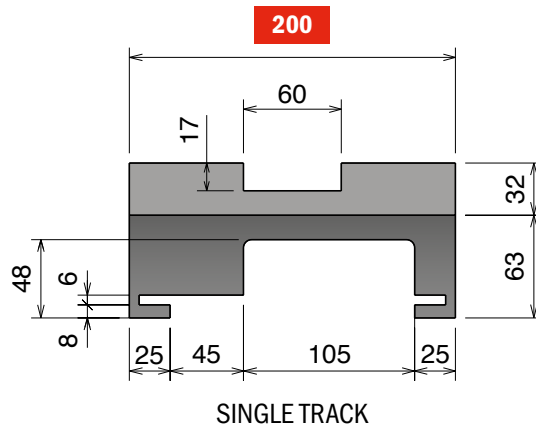

Available in
BluLub®

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
717	71713614	1	200	Standard codes on table
717	71713624	2	395	
717	71713634	3	590	add "B" for BluLub®
717	71713644	4	785	



add "C"
 for abrasive

Part	Article-Nr.	Tracks	W	Material
717	71713614RS	1	200	RS add "RS" for RS-version
717	71713624RS	2	395	
717	71713634RS	3	590	
717	71713644RS	4	785	

882-8857 K750 M85 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
Polietilene UHMW-PE
Polyethylene UHMW-PE
Polyäthylen UHMW-PE

882-8857 K750 M85 Series

Chain Reference


882 M - K750

8857 M - K750


Curva Larghezza Base = 200 mm; Passo = 195 mm

Curve Basic Width = 200 mm; Pitch = 195 mm


Kurve Basisbreite = 200 mm; Teilung = 195 mm

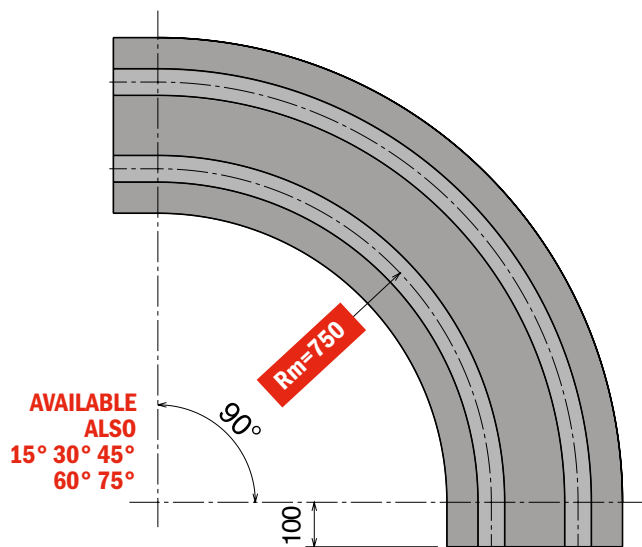


IN & OUT
AVAILABLE ALSO
125 mm - 50 mm - without

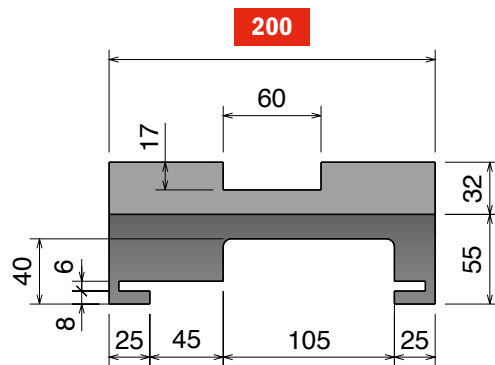

SINGLE TRACK

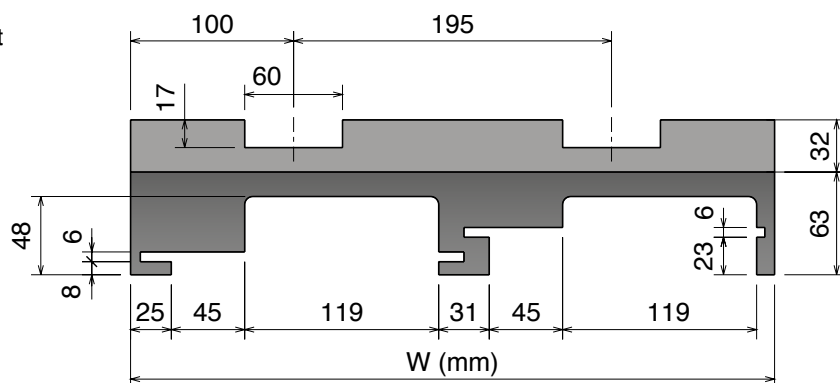

MULTI TRACK

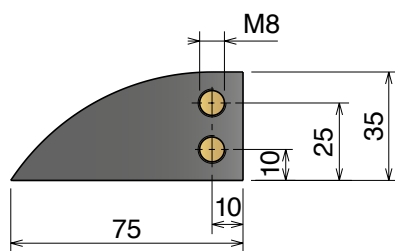

Available in
BluLub®

MAGNETIC SYSTEM

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

Part	Article-Nr.	Tracks	W	Material
718	71816614	1	200	Standard codes on table
718	71816624	2	395	
718	71816634	3	590	

add "B" for
BluLub®

add "C"
for abrasive

Part	Article-Nr.	Tracks	W	Material
718	71816614RS	1	200	RS add "RS" for RS-version
718	71816624RS	2	395	
718	71816634RS	3	590	

882-8857 K750 M86 Series

Chain Reference





882 M - K750

8857 M - K750

Curva Larghezza Base = 214 mm; Passo = 200 mm

Curve Basic Width = 214 mm; Pitch = 200 mm

Kurve Basisbreite = 214 mm; Teilung = 200 mm

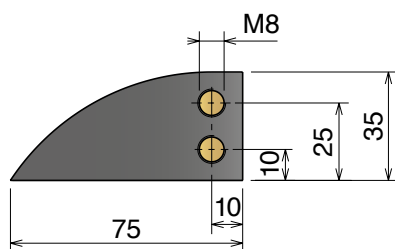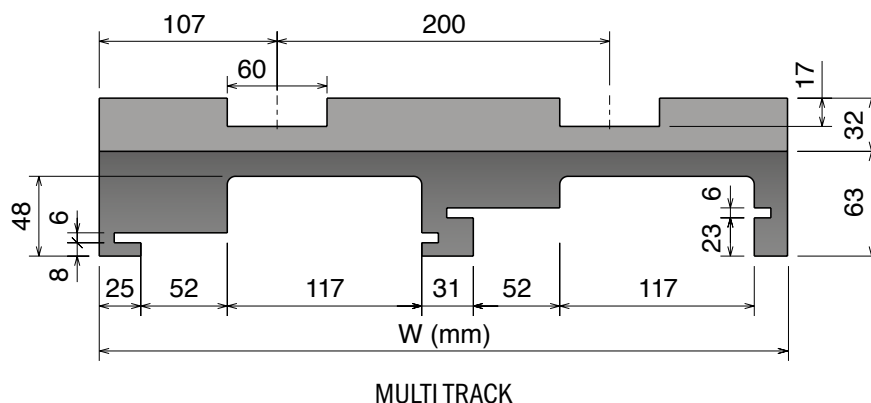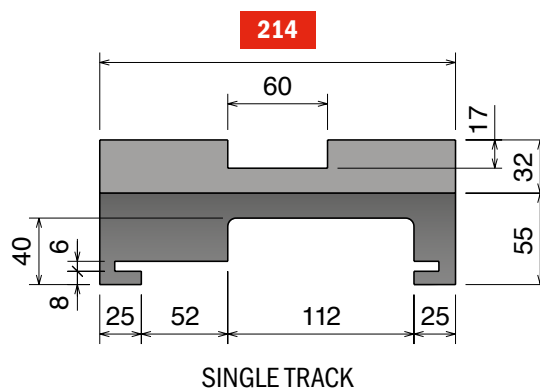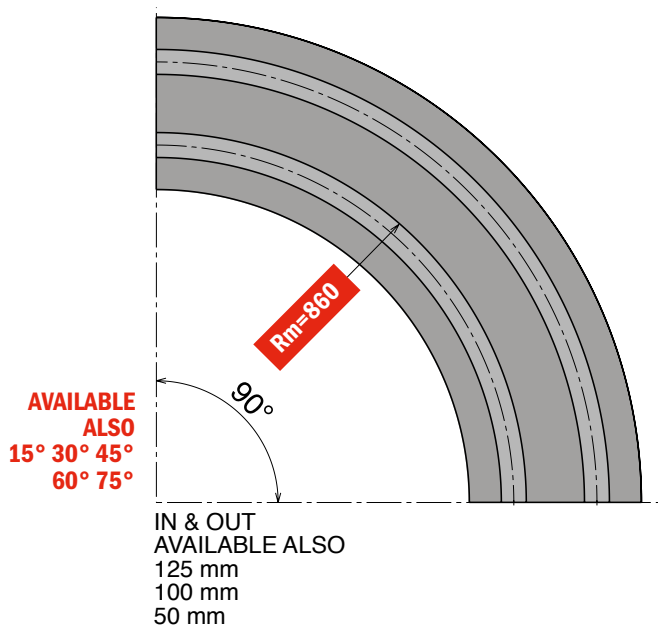

Available in
BluLub®

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
708	70818610	1	214	Standard codes on table
708	70818620	2	414	
708	70818630	3	614	

add "B" for
BluLub®

add "C" for
 abrasive

Part	Article-Nr.	Tracks	W	Material
708	70818610RS	1	214	RS add "RS" for RS-version
708	70818620RS	2	414	
708	70818630RS	3	614	

882-8857 K750 M80 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
Polietilene UHMW-PE
Polyethylene UHMW-PE
Polyäthylen UHMW-PE

882-8857 K750 M80 Series

Chain Reference


882 M - K750

8857 M - K750


Curva Larghezza Base = 200 mm; Passo = 195 mm

Curve Basic Width = 200 mm; Pitch = 195 mm


Kurve Basisbreite = 200 mm; Teilung = 195 mm

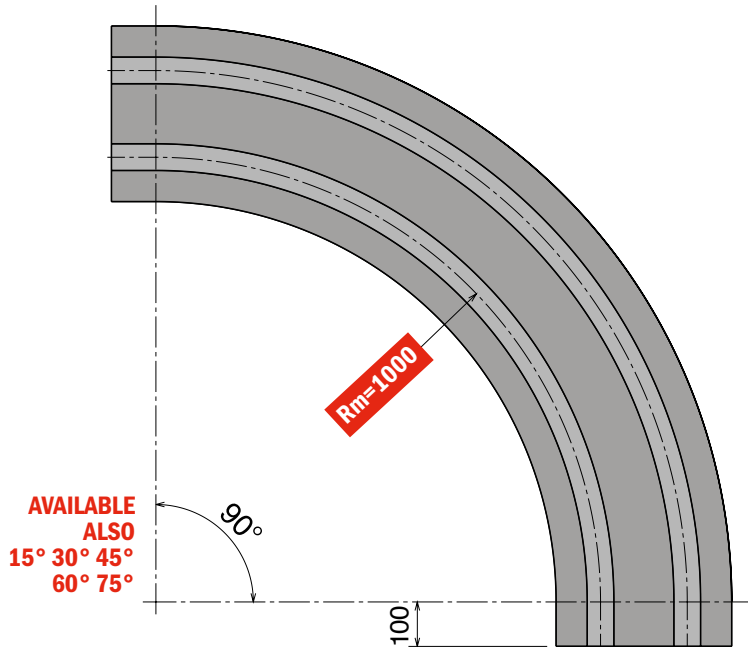


IN & OUT
AVAILABLE ALSO
125 mm - 50 mm - without

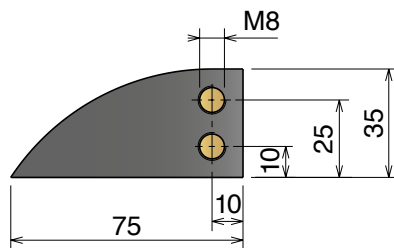

Available in
BluLub®

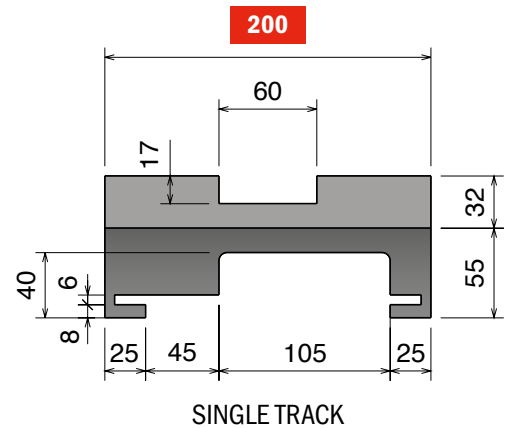

SINGLE TRACK

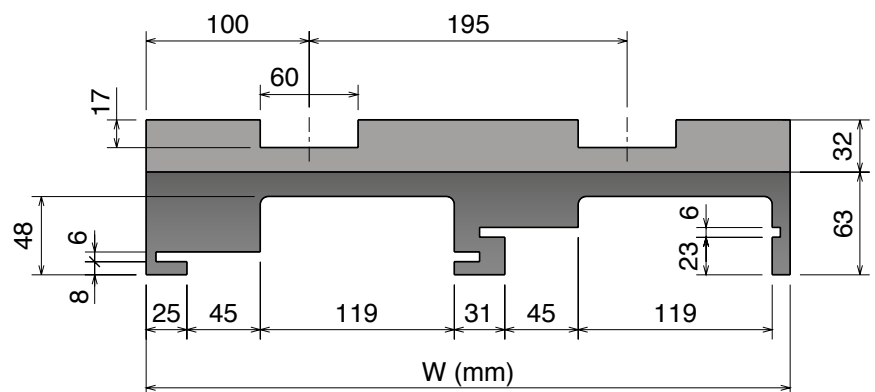

W (mm)
MULTI TRACK

MAGNETIC SYSTEM

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

Part	Article-Nr.	Tracks	W	Material
719	71919614	1	200	Standard codes on table
719	71919624	2	395	
719	71919634	3	590	

add "B" for
BluLub®

add "C"
for abrasive

Part	Article-Nr.	Tracks	W	Material
719	71919614RS	1	200	RS add "RS" for RS-version
719	71919624RS	2	395	
719	71919634RS	3	590	

Movex®

882 M K1000 M93/M94 Series


Chain Reference

882 M - K1000

Curva Larghezza Base = 270 mm


Curve Basic Width = 270 mm

Kurve Basisbreite = 270 mm

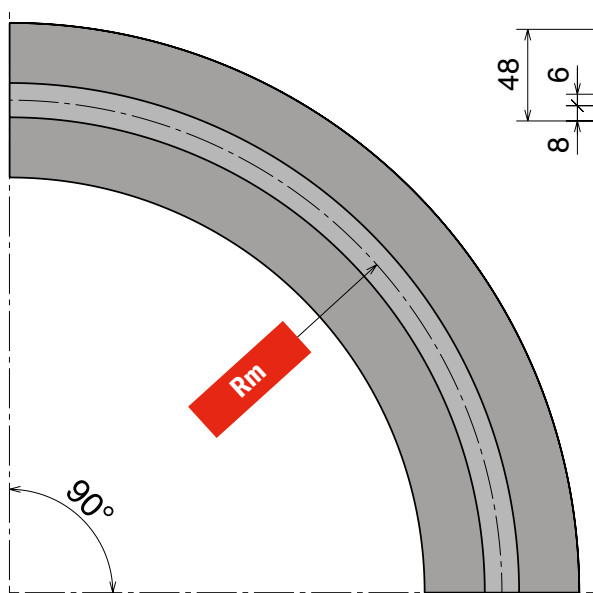


AVAILABLE
 ALSO
 15° 30° 45°
 60° 75°

IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm

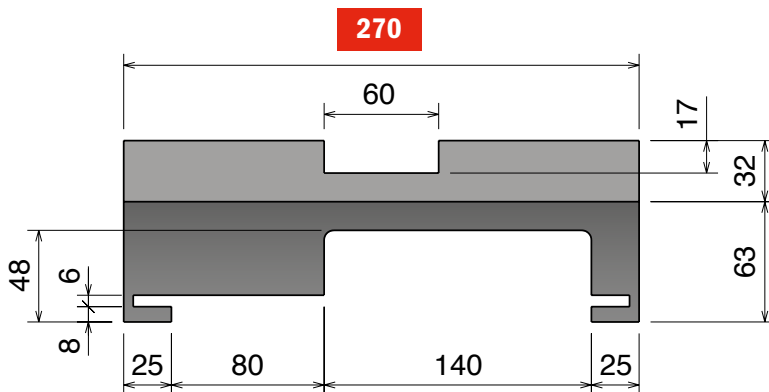

Available in
BluLub®

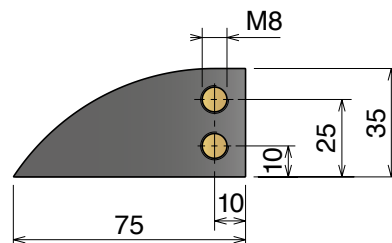

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	Rm	W	Material
709	70918610	1	860	270	Standard codes on table
709	70919610	1	1000	270	

add "**B**" for
BluLub®

add "**C**"
for abrasive

Part	Article-Nr.	Tracks	Rm	W	Material
709	70918610RS	1	860	270	RS add " RS " for RS-version
709	70919610RS	1	1000	270	

882 M K1200 M97/M98 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

882 M K1200 M97/M98 Series


Chain Reference

882 M - K1200

Curva Larghezza Base = 320 mm


Curve Basic Width = 320 mm

Kurve Basisbreite = 320 mm

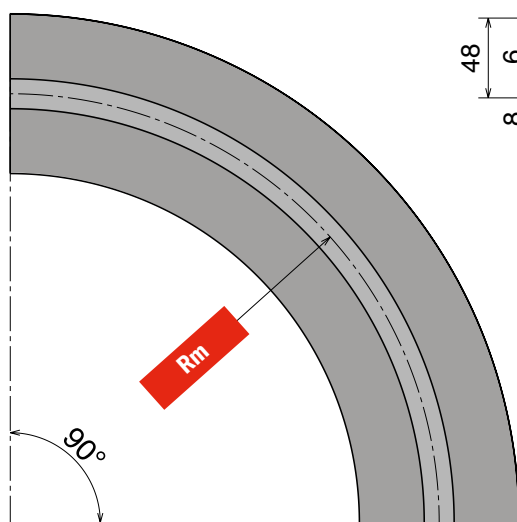


**AVAILABLE
 ALSO
 15° 30° 45°
 60° 75°**

IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm

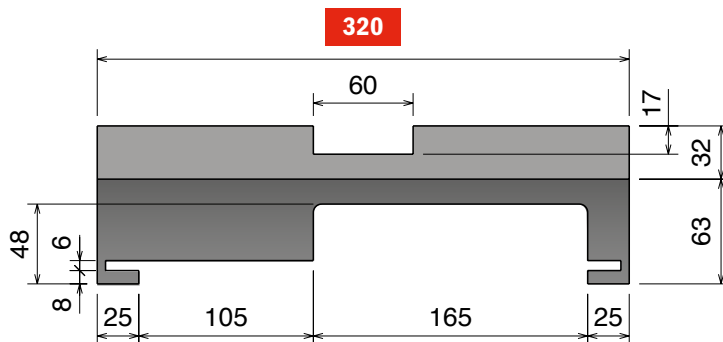

Available in
BluLub®

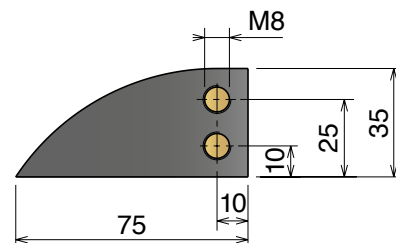

MAGNETIC SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	Article-Nr.	Tracks	Rm	W	Material
710	71018610	1	860	320	Standard codes on table
710	71019610	1	1000	320	

add "B" for
BluLub®

add "C"
 for abrasive

Part	Article-Nr.	Tracks	Rm	W	Material
710	71018610RS	1	860	320	RS
710	71019610RS	1	1000	320	

add "RS" for
 RS-version

Movex®

882 LBP K750 MP861 Series


Chain Reference

882 M LBP - K750

Curva Larghezza Base = 214 mm

Curve Basic Width = 214 mm

Kurve Basisbreite = 214 mm

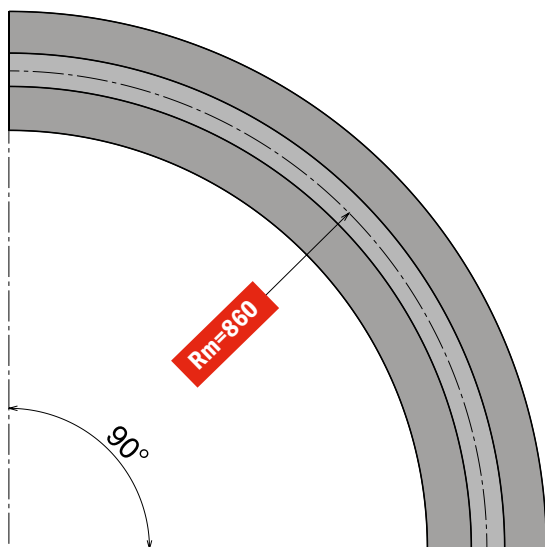

AVAILABLE

ALSO


15° 30° 45°

60° 75°

IN & OUT


AVAILABLE ALSO

125 mm - 100 mm - 50 mm

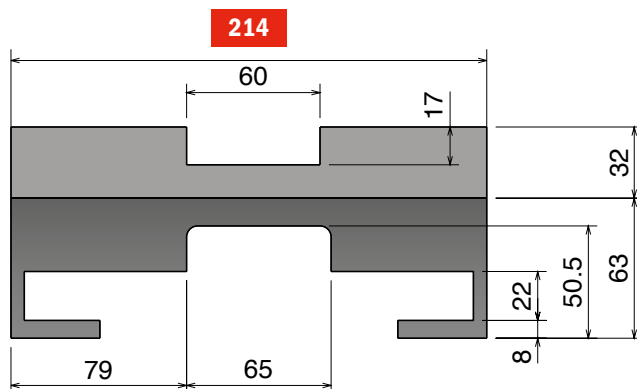

Available in

BluLub®

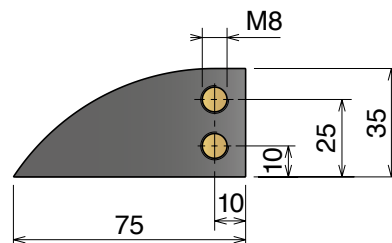

MAGNETIC SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	Article-Nr.	Tracks	W	Material
781	78118610	1	214	Standard codes on table



add "B" for
BluLub®

add "C"
 for abrasive

Part	Article-Nr.	Tracks	W	Material
781	78118610RS	1	270	add "RS" for RS-version



RS
 add "RS" for
 RS-version

882 LBP K1000 MP931/MP941 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

882 LBP K1000 MP931/MP941 Series


Chain Reference

882 M LBP - K1000

Curva Larghezza Base = 270 mm

Curve Basic Width = 270 mm

Kurve Basisbreite = 270 mm

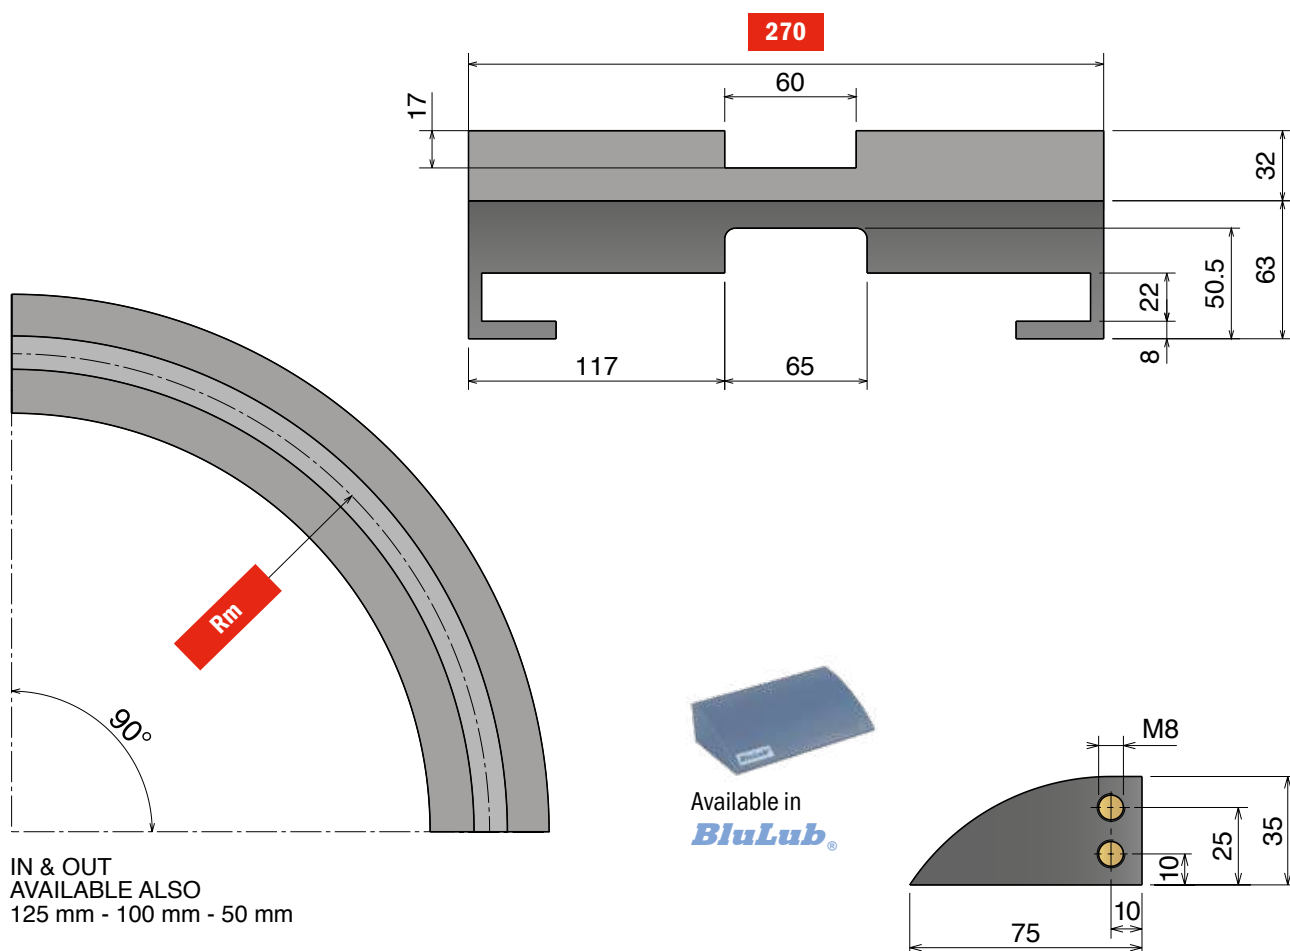

IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm

Available in
BluLub®

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MP931 Series

MAGNETIC SYSTEM

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°		Tracks	R	W
784	78418110	78418210	78418310	78418410	78418510	78418610		1	860	270
Material	Standard codes on table			add "B" for BluLub®		add "C" for abrasive			add "RS" for RS -version	

MP941 Series

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°		Tracks	R	W
784	78419110	78419210	78419310	78419410	78419510	78419610		1	1000	270
Material	Standard codes on table			add "B" for BluLub®		add "C" for abrasive			add "RS" for RS -version	

882 LBP K1000 MP91 Series


Chain Reference

882 M LBP - K1000

Curva Larghezza Base = 290 mm

Curve Basic Width = 290 mm

Kurve Basisbreite = 290 mm

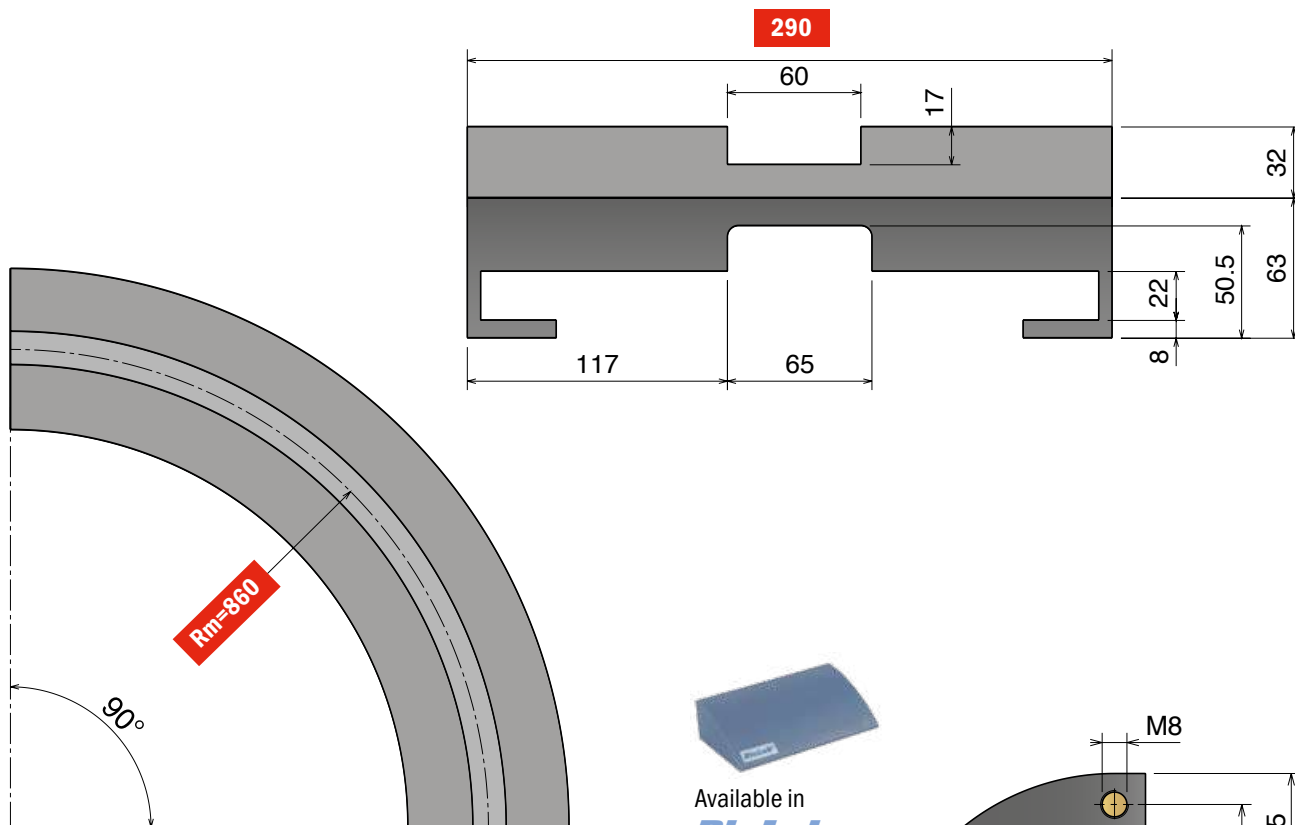


AVAILABLE
 ALSO
 15° 30° 45°
 60° 75°

IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm



Available in
BluLub®

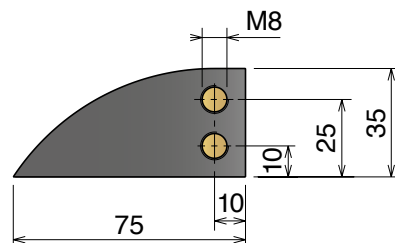

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
------	-------------	--------	---	----------

782 78218610 1 290



Standard codes
 on table



add "B" for
BluLub®



add "C"
 for abrasive

Part	Article-Nr.	Tracks	W	Material
------	-------------	--------	---	----------

782 78218610RS 1 290



RS
 add "RS" for
 RS-version

882 LBP K1200 MP971/MP981 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

882 LBP K1200 MP971/MP981 Series


Chain Reference

882 M LBP - K1200

Curva Larghezza Base = 340 mm

Curve Basic Width = 340 mm

Kurve Basisbreite = 340 mm

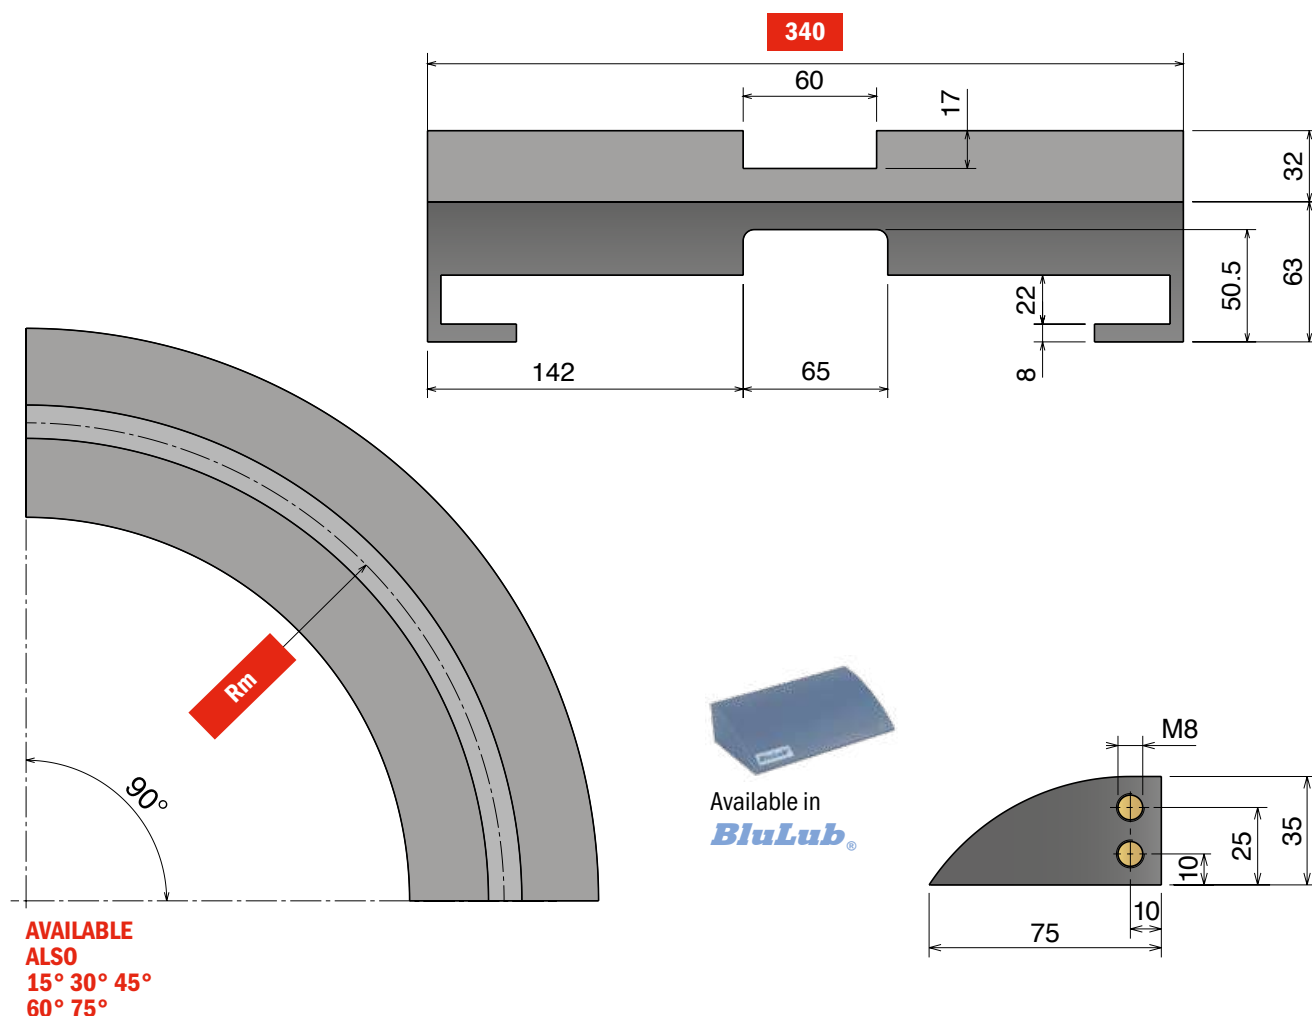

AVAILABLE

ALSO

15° 30° 45°

60° 75°


IN & OUT

AVAILABLE ALSO

125 mm - 100 mm - 50 mm

Available in

BluLub®

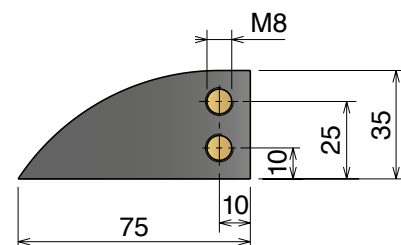

MAGNETIC SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	Article-Nr.	Tracks	Rm	W	Material
783	78318610	1	860	340	 Standard codes on table
783	78319610	1	1000	340	



add "B" for
BluLub®



add "C" for
 abrasive

Part	Article-Nr.	Tracks	Rm	W	Material
783	78318610RS	1	860	340	 RS
783	78319610RS	1	1000	340	

add "RS" for
 RS-version

Movex®

260 M MB7 Series


Chain Reference

260 M - K330


Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm


Kurve Basisbreite = 100 mm; Teilung = 85 mm

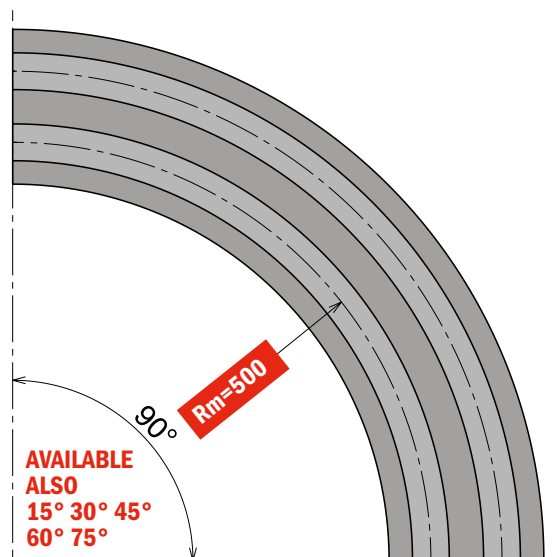


IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm

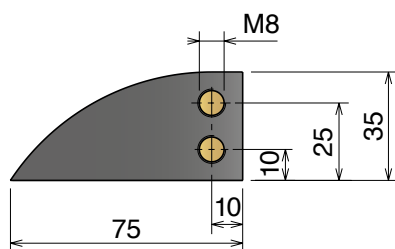

Available in
BluLub®

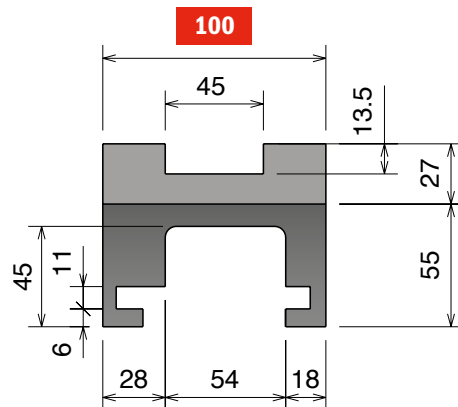

SINGLE TRACK

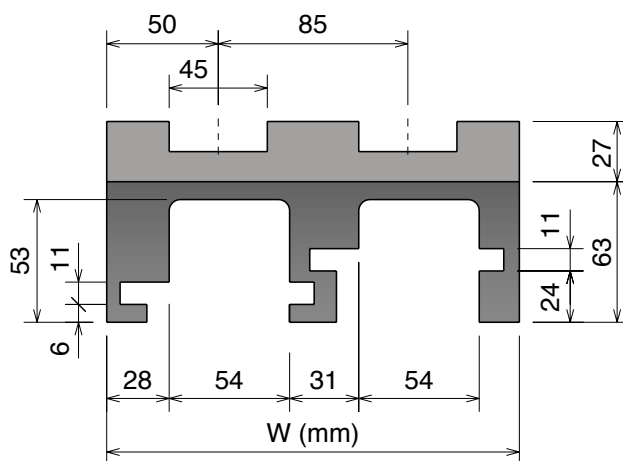

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
705	70511610	1	100	Standard codes on table
705	70511620	2	185	
705	70511630	3	270	
705	70511640	4	355	add "B" for BluLub®
705	70511650	5	440	
705	70511660	6	525	
705	70511670	7	610	add "C" for abrasive
705	70511680	8	695	

Part	Article-Nr.	Tracks	W	Material
705	70511610RS	1	100	RS add "RS" for RS-version
705	70511620RS	2	185	
705	70511630RS	3	270	
705	70511640RS	4	355	
705	70511650RS	5	440	
705	70511660RS	6	525	
705	70511670RS	7	610	
705	70511680RS	8	695	

260 M MB6 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

260 M MB6 Series


Chain Reference

260 M - K330



Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm


Kurve Basisbreite = 100 mm; Teilung = 85 mm

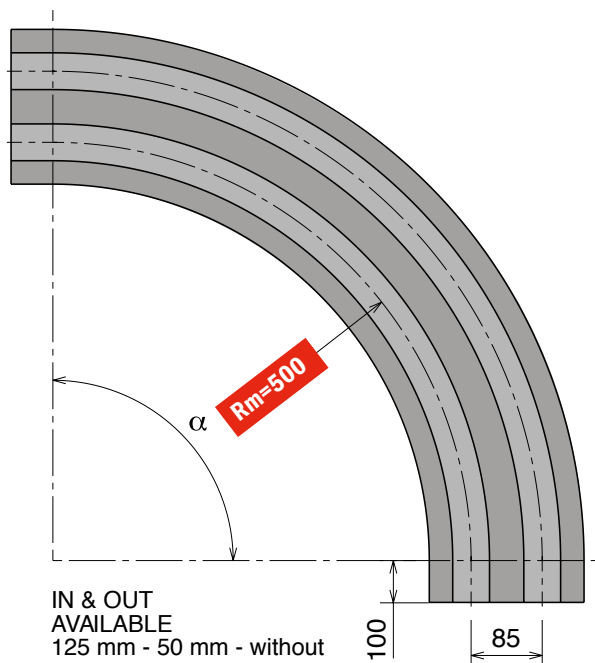

Available in
BluLub

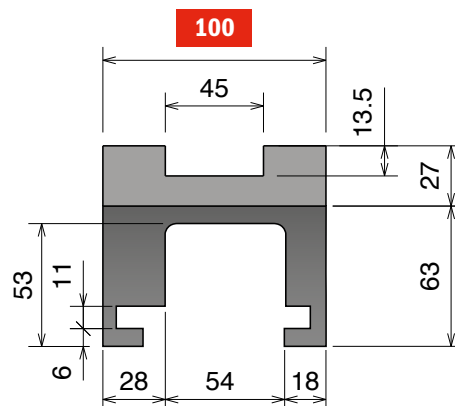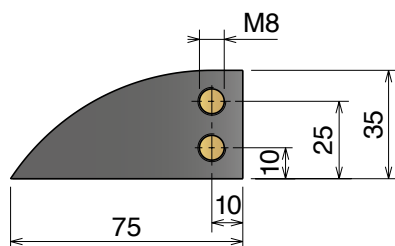

SINGLE TRACK

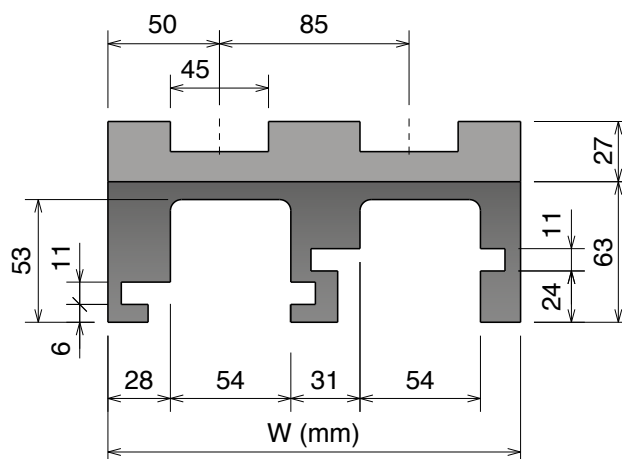

MULTI TRACK

MAGNETIC SYSTEM

Upper part available, on request,
 also in **BluLub**
 and for abrasive applications.

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
732	73211114	73211214	73211314	73211414	73211514	73211614	1	100	Standard codes on table
732	73211124	73211224	73211324	73211424	73211524	73211624	2	185	
732	73211134	73211234	73211334	73211434	73211534	73211634	3	270	
732	73211144	73211244	73211344	73211444	73211544	73211644	4	355	add "B" for BluLub
732	73211154	73211254	73211354	73211454	73211554	73211654	5	440	
732	73211164	73211264	73211364	73211464	73211564	73211664	6	525	
732	73211174	73211274	73211374	73211474	73211574	73211674	7	610	add "C" for abrasive
732	73211184	73211284	73211384	73211484	73211584	73211684	8	695	

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
732	73211114RS	73211214RS	73211314RS	73211414RS	73211514RS	73211614RS	1	100	RS add "RS" for RS-version
732	73211124RS	73211224RS	73211324RS	73211424RS	73211524RS	73211624RS	2	185	
732	73211134RS	73211234RS	73211334RS	73211434RS	73211534RS	73211634RS	3	270	
732	73211144RS	73211244RS	73211344RS	73211444RS	73211544RS	73211644RS	4	355	
732	73211154RS	73211254RS	73211354RS	73211454RS	73211554RS	73211654RS	5	440	
732	73211164RS	73211264RS	73211364RS	73211464RS	73211564RS	73211664RS	6	525	
732	73211174RS	73211274RS	73211374RS	73211474RS	73211574RS	73211674RS	7	610	
732	73211184RS	73211284RS	73211384RS	73211484RS	73211584RS	73211684RS	8	695	

260 M MB4 Series


Chain Reference

260 M - K330



Curva Larghezza Base = 111 mm; Passo = 85 mm

Curve Basic Width = 111 mm; Pitch = 85 mm


Kurve Basisbreite = 111 mm; Teilung = 85 mm

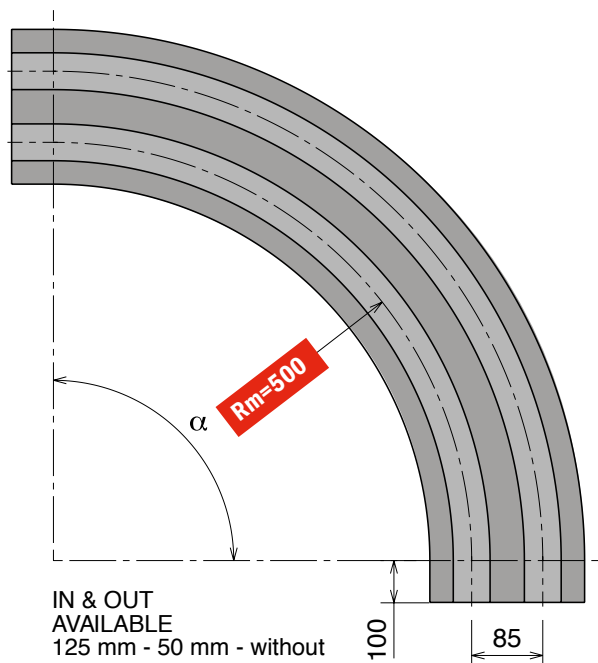

Available in
BluLub®

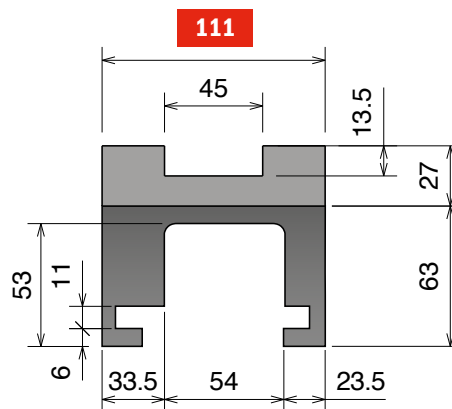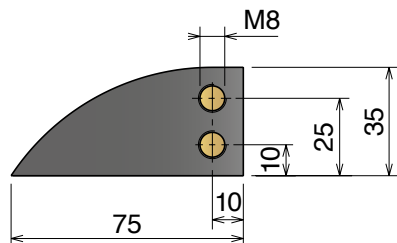

SINGLE TRACK

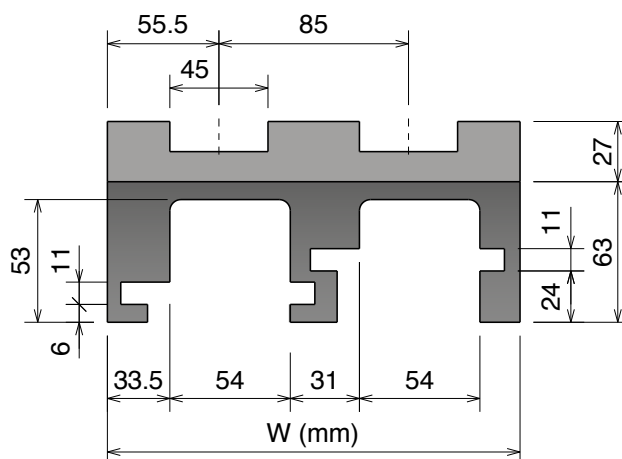

MULTI TRACK

MAGNETIC SYSTEM

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
733	73311114	73311214	73311314	73311414	73311514	73311614	1	111	 Standard codes on table
733	73311124	73311224	73311324	73311424	73311524	73311624	2	196	
733	73311134	73311234	73311334	73311434	73311534	73311634	3	281	
733	73311144	73311244	73311344	73311444	73311544	73311644	4	366	
733	73311154	73311254	73311354	73311454	73311554	73311654	5	451	 add "B" for BluLub®
733	73311164	73311264	73311364	73311464	73311564	73311664	6	536	
733	73311174	73311274	73311374	73311474	73311574	73311674	7	621	 add "C" for abrasive
733	73311184	73311284	73311384	73311484	73311584	73311684	8	706	

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
733	73311114RS	73311214RS	73311314RS	73311414RS	73311514RS	73311614RS	1	111	 RS add "RS" for RS-version
733	73311124RS	73311224RS	73311324RS	73311424RS	73311524RS	73311624RS	2	196	
733	73311134RS	73311234RS	73311334RS	73311434RS	73311534RS	73311634RS	3	281	
733	73311144RS	73311244RS	73311344RS	73311444RS	73311544RS	73311644RS	4	366	
733	73311154RS	73311254RS	73311354RS	73311454RS	73311554RS	73311654RS	5	451	
733	73311164RS	73311264RS	73311364RS	73311464RS	73311564RS	73311664RS	6	536	
733	73311174RS	73311274RS	73311374RS	73311474RS	73311574RS	73311674RS	7	621	
733	73311184RS	73311284RS	73311384RS	73311484RS	73311584RS	73311684RS	8	706	

260 M MB8 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

260 M MB8 Series


Chain Reference

260 M - K330



Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm


Kurve Basisbreite = 100 mm; Teilung = 85 mm

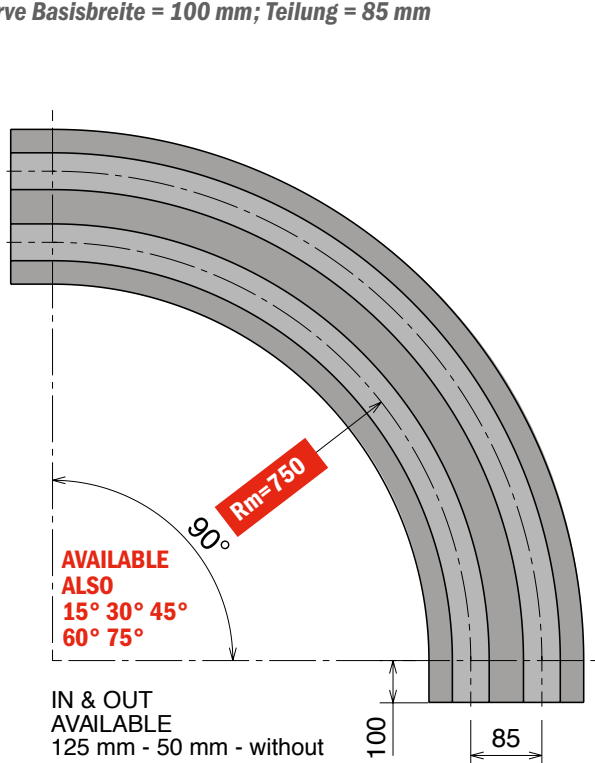

Available in
BluLub®

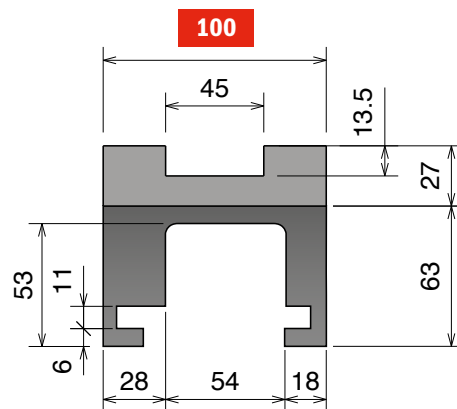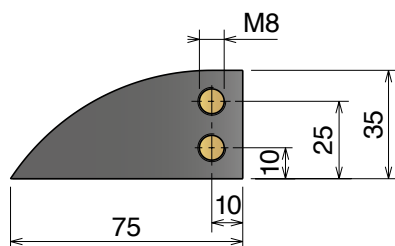

SINGLE TRACK

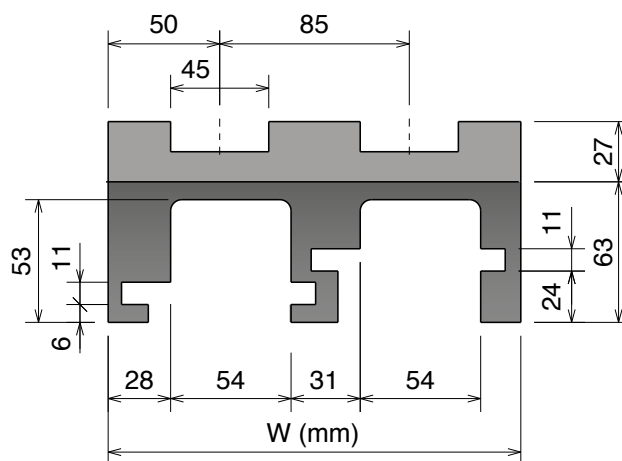

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
732	73216614	1	100	Standard codes on table
732	73216624	2	185	
732	73216634	3	270	
732	73216644	4	355	add "B" for BluLub®
732	73216654	5	440	
732	73216664	6	525	
732	73216674	7	610	add "C" for abrasive
732	73216684	8	695	

Part	Article-Nr.	Tracks	W	Material
732	73216614RS	1	100	RS add "RS" for RS-version
732	73216624RS	2	185	
732	73216634RS	3	270	
732	73216644RS	4	355	
732	73216654RS	5	440	
732	73216664RS	6	525	
732	73216674RS	7	610	
732	73216684RS	8	695	

Movex®

260 M MB5D Series


Chain Reference

260 M - K330

Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm



Kurve Basisbreite = 100 mm; Teilung = 85 mm

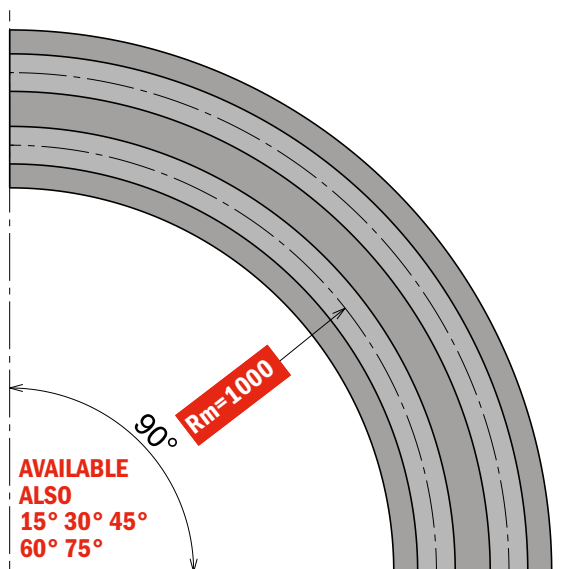


IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm



Available in
BluLub®

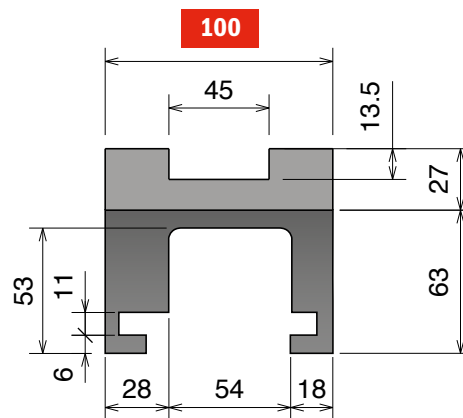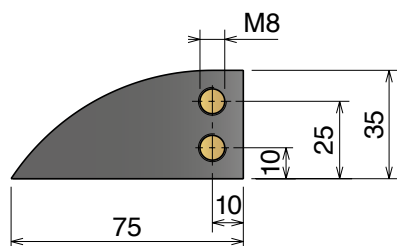

SINGLE TRACK

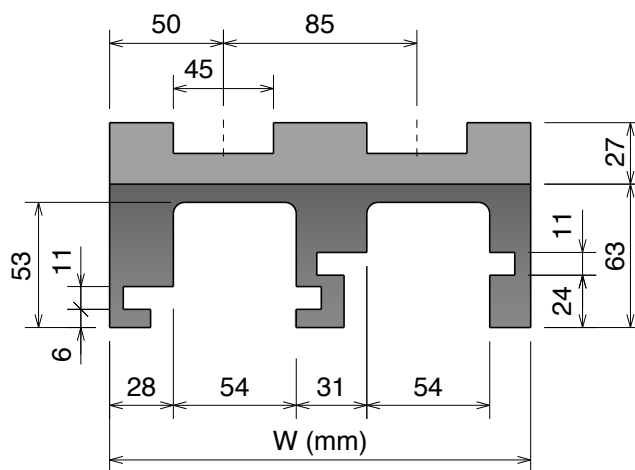

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
732	73219610	1	100	Standard codes on table
732	73219620	2	185	
732	73219630	3	270	
732	73219640	4	355	add "B" for BluLub®
732	73219650	5	440	
732	73219660	6	525	
732	73219670	7	610	add "C" for abrasive
732	73219680	8	695	

Part	Article-Nr.	Tracks	W	Material
732	73219610RS	1	100	RS add "RS" for RS-version
732	73219620RS	2	185	
732	73219630RS	3	270	
732	73219640RS	4	355	
732	73219650RS	5	440	
732	73219660RS	6	525	
732	73219670RS	7	610	
732	73219680RS	8	695	

260 M K450 MB22 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

260 M K450 MB22 Series


Chain Reference

260 M - K450



Curva Larghezza Base = 129 mm; Passo = 117 mm

Curve Basic Width = 129 mm; Pitch = 117 mm


Kurve Basisbreite = 129 mm; Teilung = 117 mm

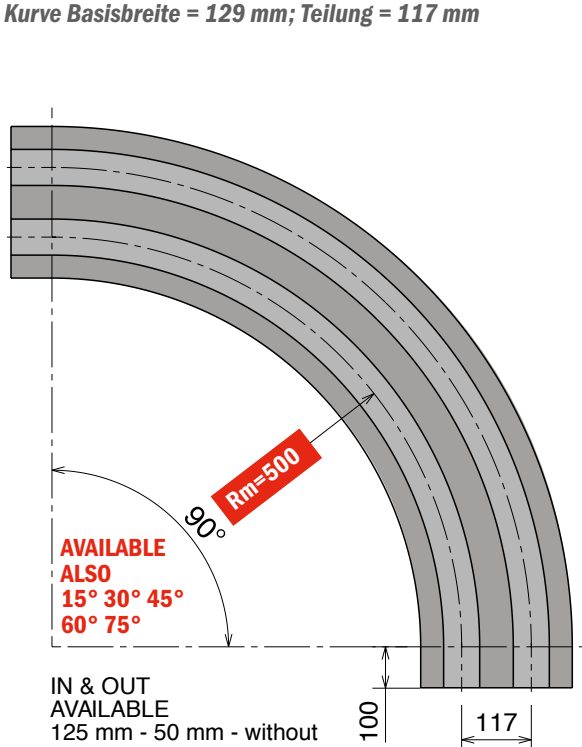

Available in
BluLub®

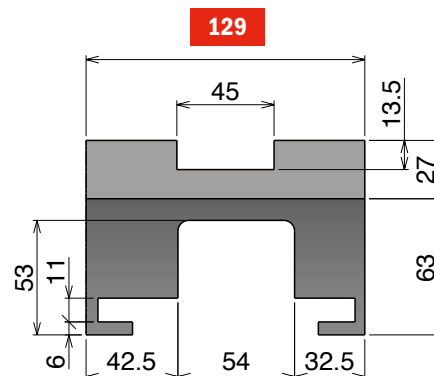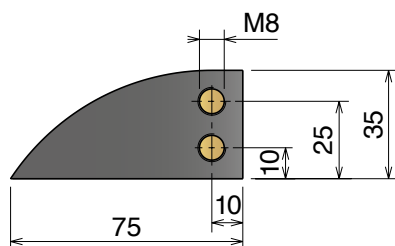

SINGLE TRACK

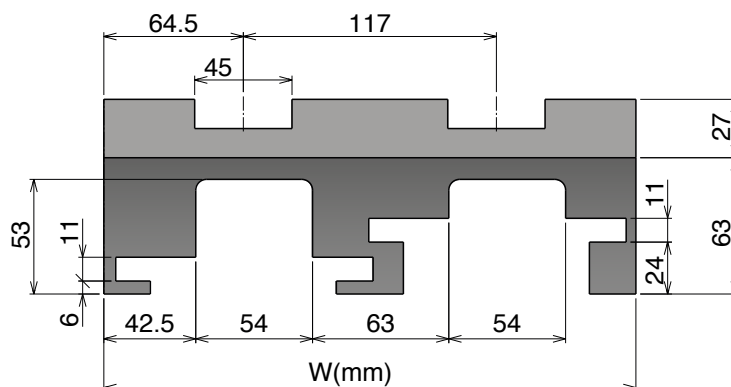

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
734	73411614	1	129	Standard codes on table
734	73411624	2	246	
734	73411634	3	363	add "B" for BluLub®
734	73411644	4	480	



add "C"
 for abrasive

Part	Article-Nr.	Tracks	W	Material
734	73411614RS	1	129	RS add "RS" for RS-version
734	73411624RS	2	246	
734	73411634RS	3	363	
734	73411644RS	4	480	

260 M K450 MB27 Series



Chain Reference

260 M - K450


Curva Larghezza Base = 129 mm; Passo = 117 mm

Curve Basic Width = 129 mm; Pitch = 117 mm

Kurve Basisbreite = 129 mm; Teilung = 117 mm

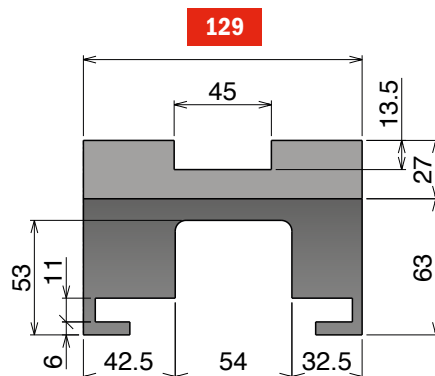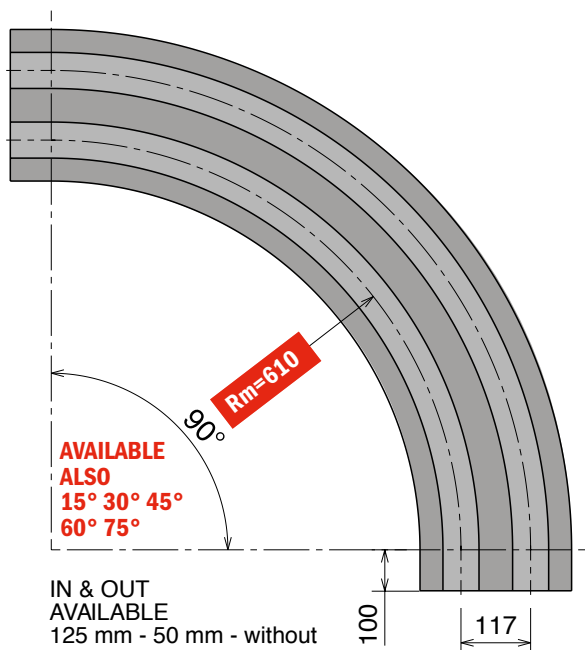


SINGLE TRACK

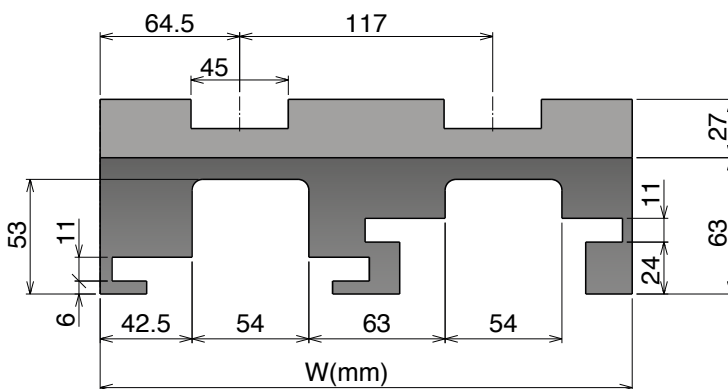

MULTI TRACK



Available in
BluLub®

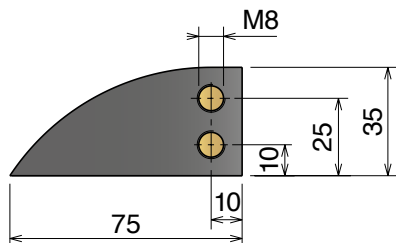

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
734	73413614	1	129	Standard codes on table
734	73413624	2	246	
734	73413634	3	363	add "B" for BluLub®
734	73413644	4	480	



Part	Article-Nr.	Tracks	W	Material
734	73413614RS	1	129	add "RS" for RS-version
734	73413624RS	2	246	
734	73413634RS	3	363	
734	73413644RS	4	480	



261 M MC7 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

261 M MC7 Series


Chain Reference

261 M - K330

Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm



Kurve Basisbreite = 100 mm; Teilung = 85 mm

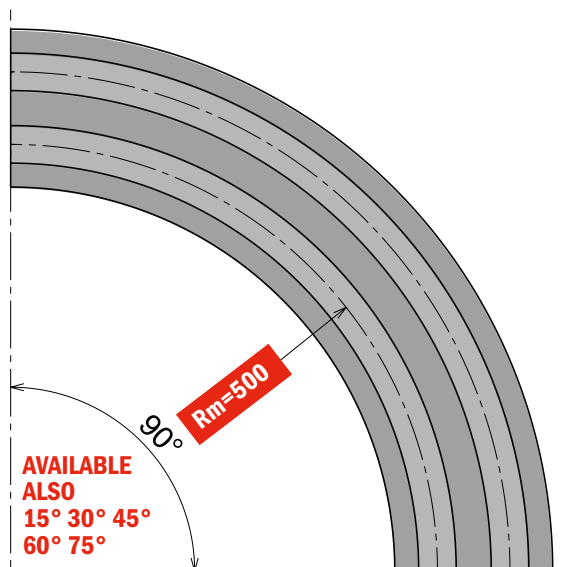


IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm



Available in
BluLub®

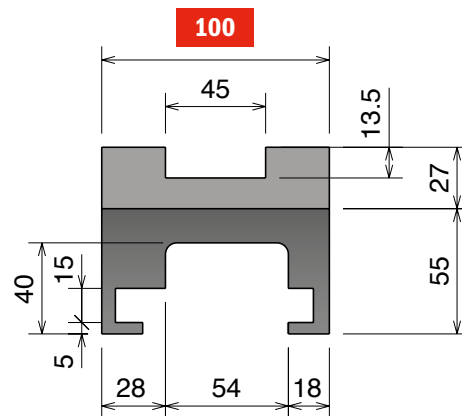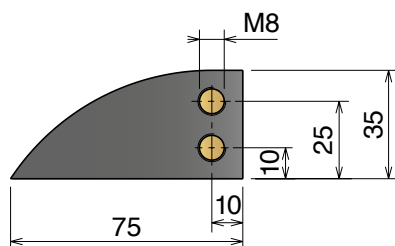

SINGLE TRACK

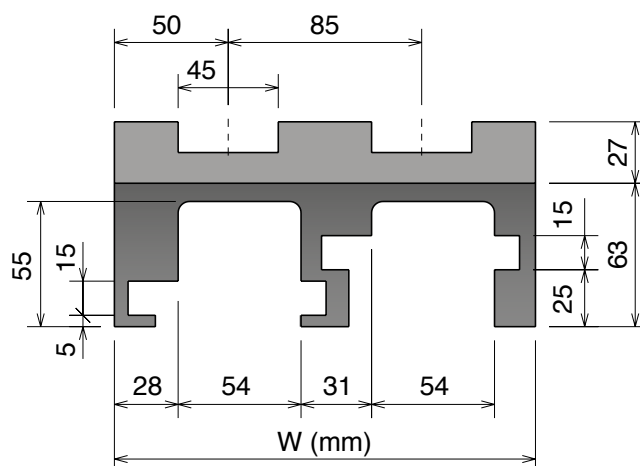

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
706	70611610	1	100	Standard codes on table
706	70611620	2	185	
706	70611630	3	270	
706	70611640	4	355	add "B" for BluLub®
706	70611650	5	440	
706	70611660	6	525	
706	70611670	7	610	add "C" for abrasive
706	70611680	8	695	

Part	Article-Nr.	Tracks	W	Material
706	70611610RS	1	100	RS add "RS" for RS-version
706	70611620RS	2	185	
706	70611630RS	3	270	
706	70611640RS	4	355	
706	70611650RS	5	440	
706	70611660RS	6	525	
706	70611670RS	7	610	
706	70611680RS	8	695	

Movex®

261 M MC6 Series


Chain Reference

261 M - K330



Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm


Kurve Basisbreite = 100 mm; Teilung = 85 mm

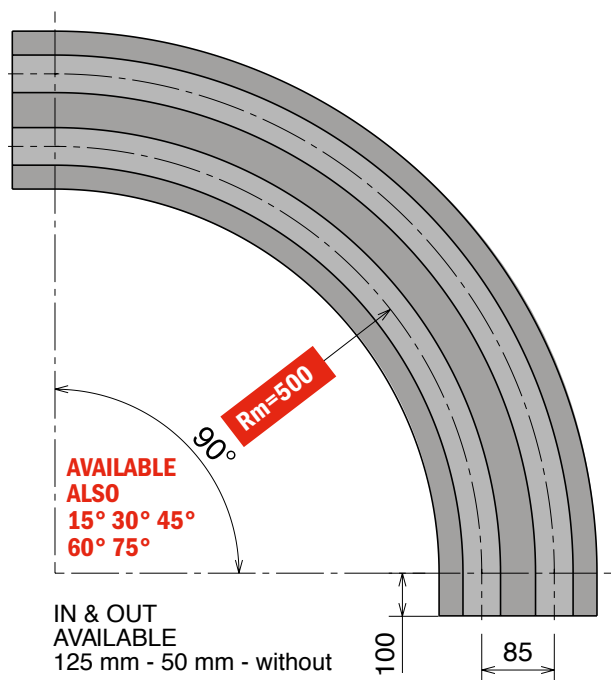

Available in
BluLub®

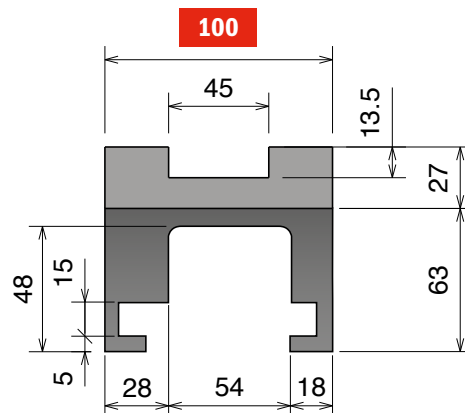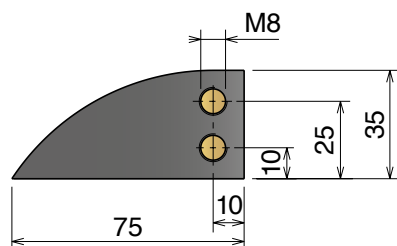

SINGLE TRACK

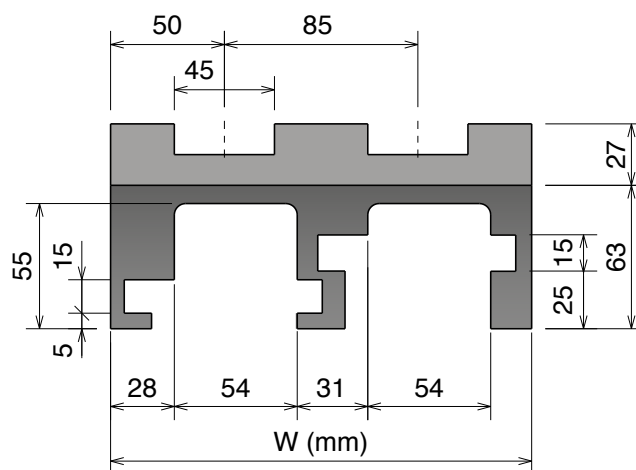

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
706	70611614	1	100	Standard codes on table
706	70611624	2	185	
706	70611634	3	270	
706	70611644	4	355	add " B " for BluLub®
706	70611654	5	440	
706	70611664	6	525	
706	70611674	7	610	add " C " for abrasive
706	70611684	8	695	

Part	Article-Nr.	Tracks	W	Material
706	70611614RS	1	100	RS add " RS " for RS-version
706	70611624RS	2	185	
706	70611634RS	3	270	
706	70611644RS	4	355	
706	70611654RS	5	440	
706	70611664RS	6	525	
706	70611674RS	7	610	
706	70611684RS	8	695	

261 M MC4 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

261 M MC4 Series


Chain Reference

261 M - K330



Curva Larghezza Base = 111 mm; Passo = 85 mm

Curve Basic Width = 111 mm; Pitch = 85 mm


Kurve Basisbreite = 111 mm; Teilung = 85 mm

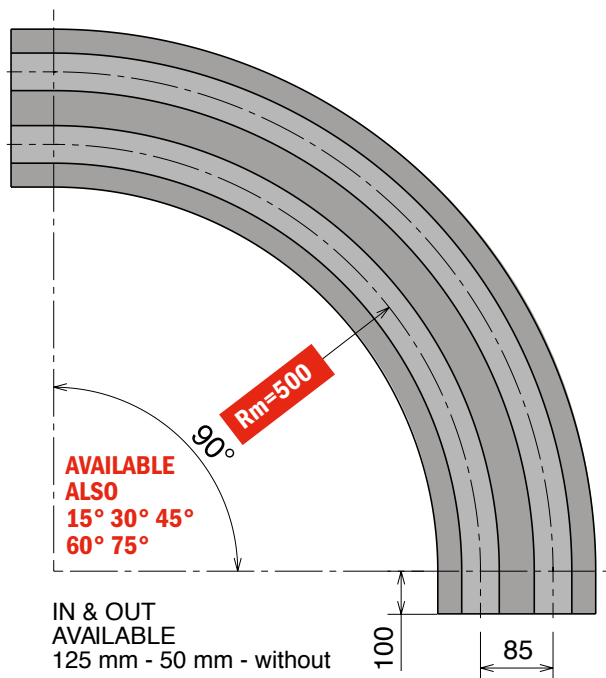

Available in
BluLub®

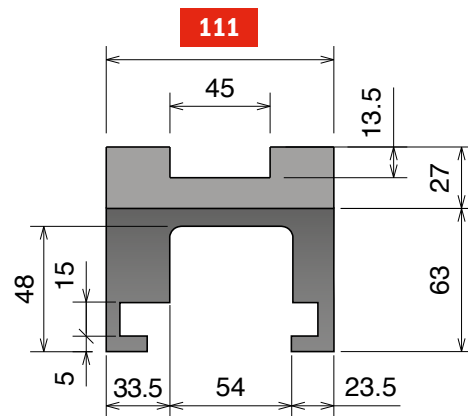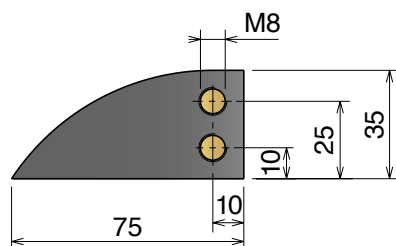

SINGLE TRACK

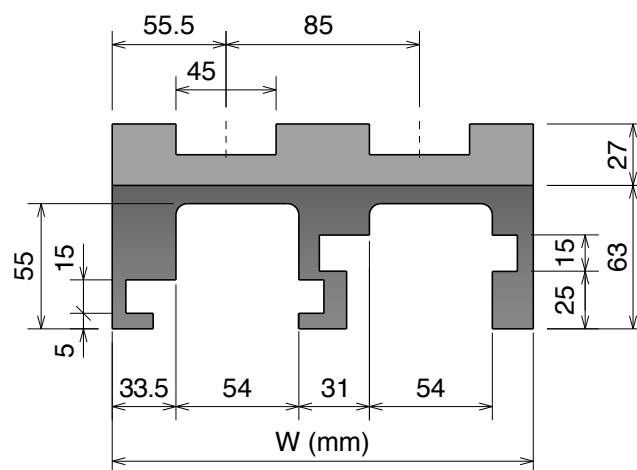

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
735	73511614	1	111	Standard codes on table
735	73511624	2	196	
735	73511634	3	281	
735	73511644	4	366	add "B" for BluLub®
735	73511654	5	451	
735	73511664	6	536	
735	73511674	7	621	add "C" for abrasive
735	73511684	8	706	

Part	Article-Nr.	Tracks	W	Material
735	73511614RS	1	111	RS add "RS" for RS-version
735	73511624RS	2	196	
735	73511634RS	3	281	
735	73511644RS	4	366	
735	73511654RS	5	451	
735	73511664RS	6	536	
735	73511674RS	7	621	
735	73511684RS	8	706	

Movex®

261 M MC8 Series


Chain Reference

261 M - K330



Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm


Kurve Basisbreite = 100 mm; Teilung = 85 mm

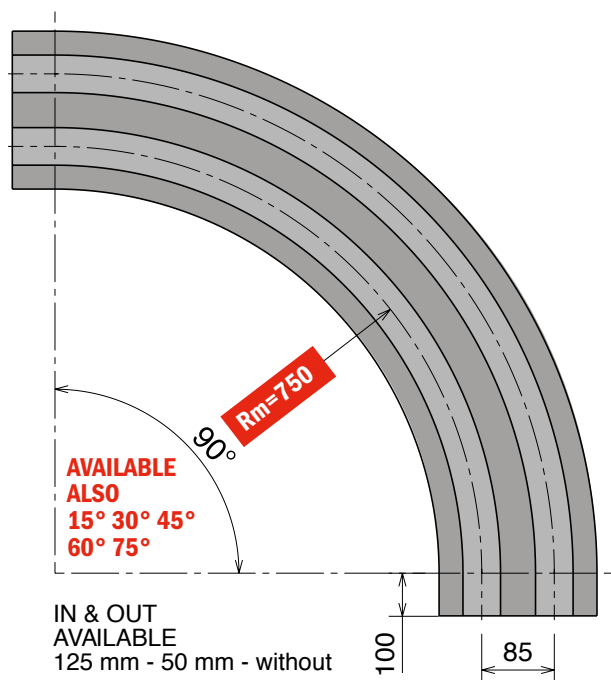

Available in
BluLub®

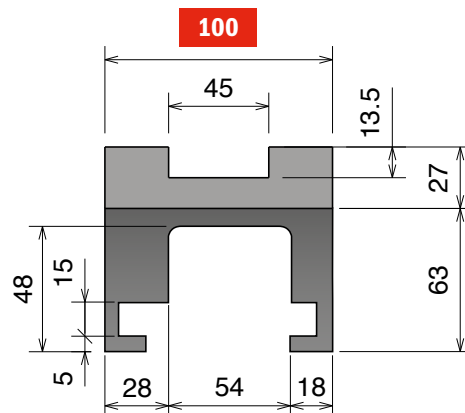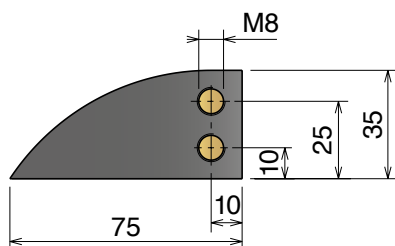

SINGLE TRACK

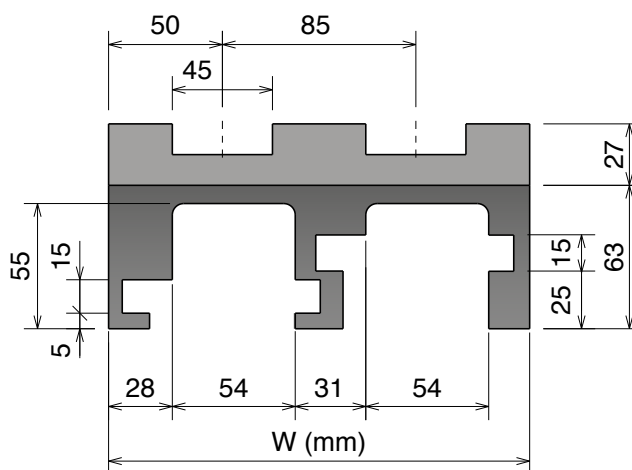

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
706	70616614	1	100	Standard codes on table
706	70616624	2	185	
706	70616634	3	270	
706	70616644	4	355	add "B" for BluLub®
706	70616654	5	440	
706	70616664	6	525	
706	70616674	7	610	add "C" for abrasive
706	70616684	8	695	

Part	Article-Nr.	Tracks	W	Material
706	70616614RS	1	100	RS add "RS" for RS-version
706	70616624RS	2	185	
706	70616634RS	3	270	
706	70616644RS	4	355	
706	70616654RS	5	440	
706	70616664RS	6	525	
706	70616674RS	7	610	
706	70616684RS	8	695	

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

261 M MC5D Series


Chain Reference

261 M - K330

Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm



Kurve Basisbreite = 100 mm; Teilung = 85 mm

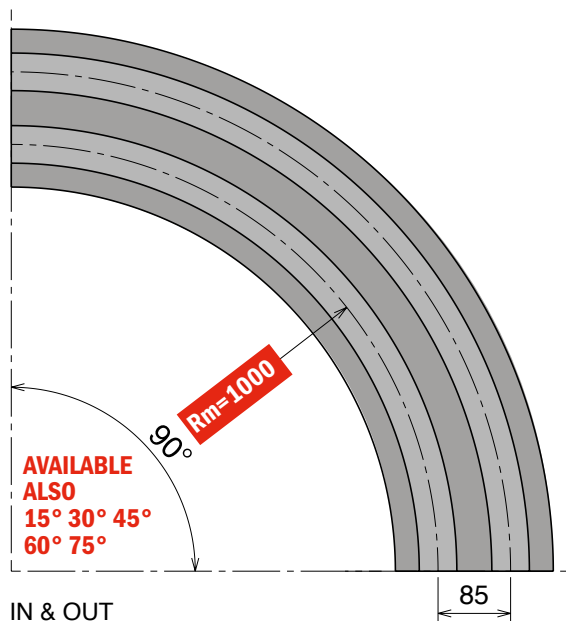


IN & OUT
AVAILABLE
125 mm - 100 mm - 50 mm



Available in
BluLub®

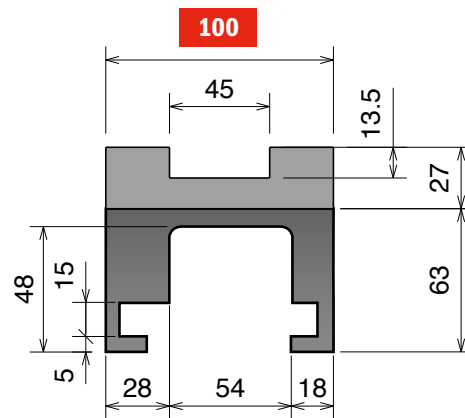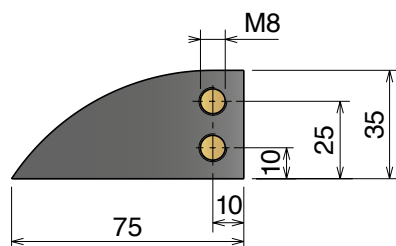

SINGLE TRACK

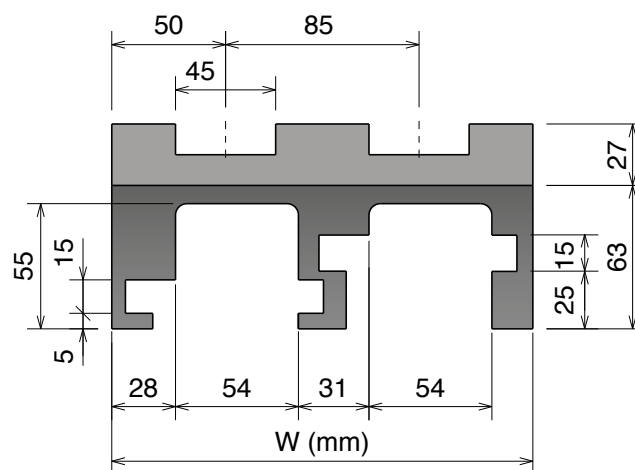

MULTI TRACK

Upper part available, on request,
also in **BluLub**®
and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material	
706	70619610	1	100		Standard codes on table
706	70619620	2	185		
706	70619630	3	270		
706	70619640	4	355		add " B " for <i>BluLub®</i>
706	70619650	5	440		
706	70619660	6	525		
706	70619670	7	610		add " C " for abrasive
706	70619680	8	695		

Part	Article-Nr.	Tracks	W	Material
706	70619610RS	1	100	 add “RS” for RS-version
706	70619620RS	2	185	
706	70619630RS	3	270	
706	70619640RS	4	355	
706	70619650RS	5	440	
706	70619660RS	6	525	
706	70619670RS	7	610	
706	70619680RS	8	695	

Movex®

261 M K450 MC22 Series


Chain Reference

261 M - K450



Curva Larghezza Base = 129 mm; Passo = 117 mm

Curve Basic Width = 129 mm; Pitch = 117 mm


Kurve Basisbreite = 129 mm; Teilung = 117 mm

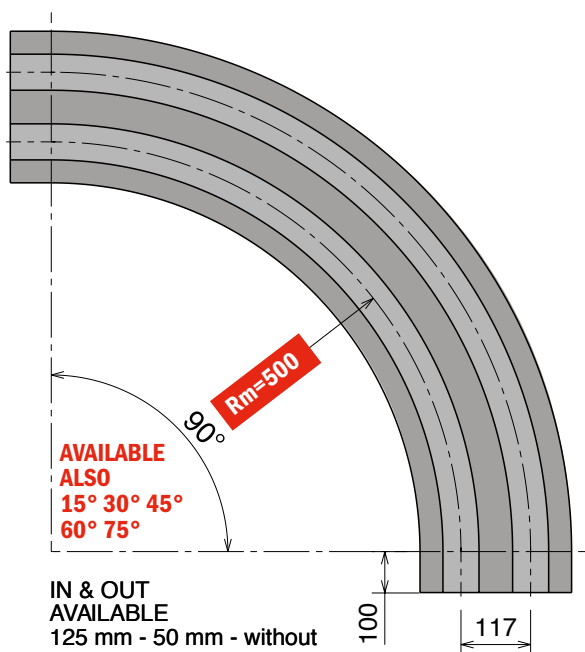

Available in
BluLub®

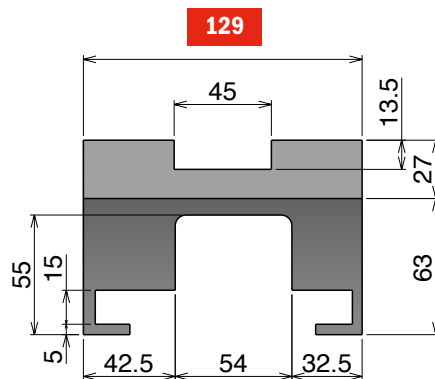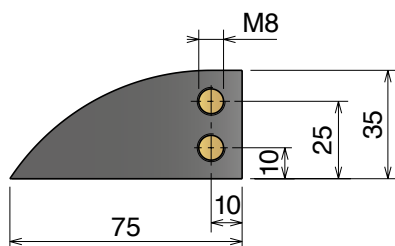

SINGLE TRACK

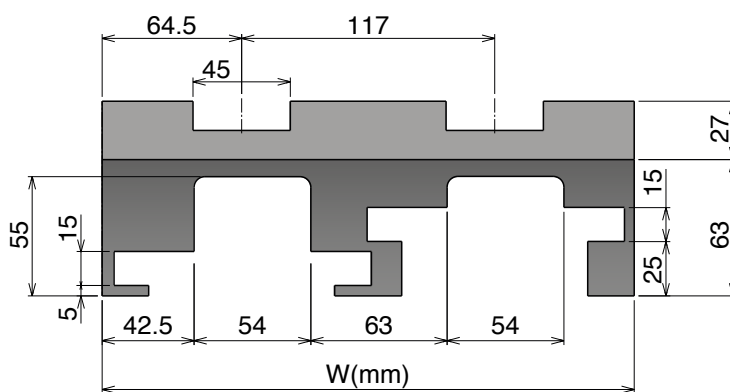

MULTI TRACK

MAGNETIC SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	Article-Nr.	Tracks	W	Material
736	73611614	1	129	Standard codes on table
736	73611624	2	246	
736	73611634	3	363	add "B" for BluLub®
736	73611644	4	480	



add "C" for abrasive

Part	Article-Nr.	Tracks	W	Material
736	73611614RS	1	129	RS add "RS" for RS-version
736	73611624RS	2	246	
736	73611634RS	3	363	
736	73611644RS	4	480	

261 M K450 MC27 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

261 M K450 MC27 Series


Chain Reference

261 M - K450



Curva Larghezza Base = 129 mm; Passo = 117 mm

Curve Basic Width = 129 mm; Pitch = 117 mm


Kurve Basisbreite = 129 mm; Teilung = 117 mm

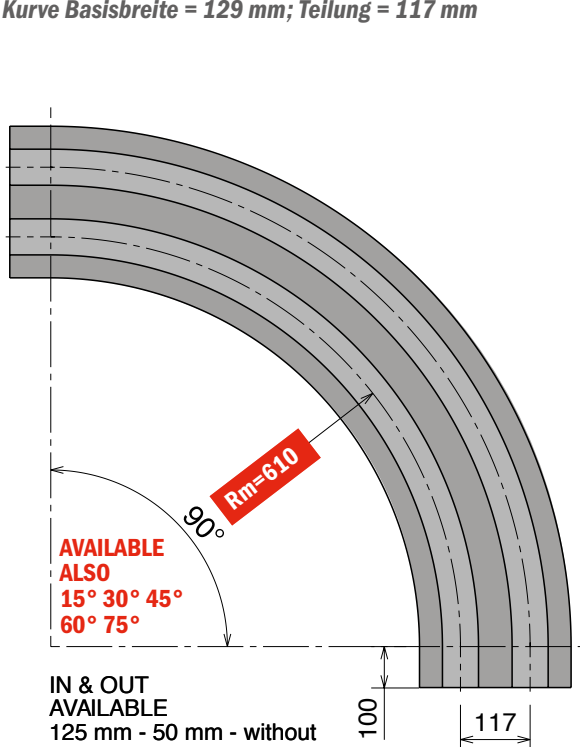

Available in
BluLub®

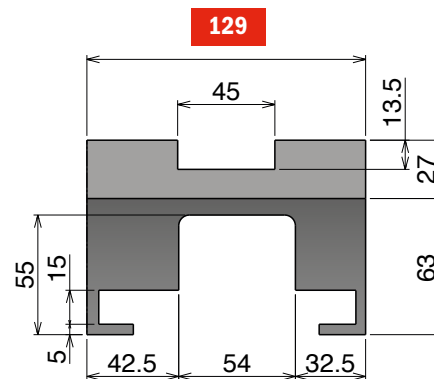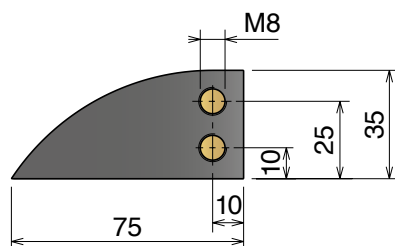

SINGLE TRACK

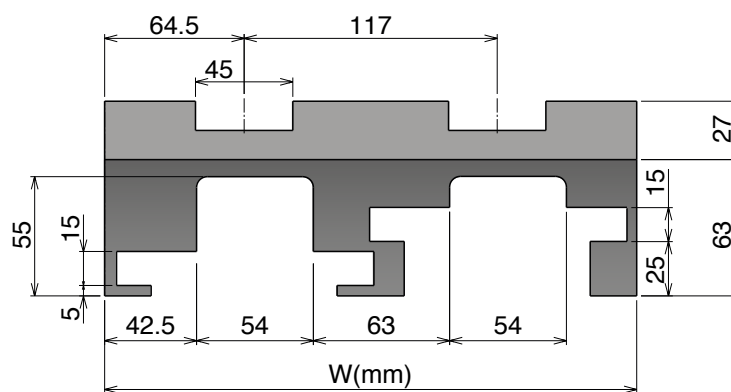

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
736	73613614	1	129	Standard codes on table
736	73613624	2	246	
736	73613634	3	363	add "B" for BluLub®
736	73613644	4	480	



add "C" for abrasive

Part	Article-Nr.	Tracks	W	Material
736	73613614RS	1	129	RS add "RS" for RS-version
736	73613624RS	2	246	
736	73613634RS	3	363	
736	73613644RS	4	480	

520 M MA7 Series


Chain Reference

520 M - K330

Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm



Kurve Basisbreite = 100 mm; Teilung = 85 mm

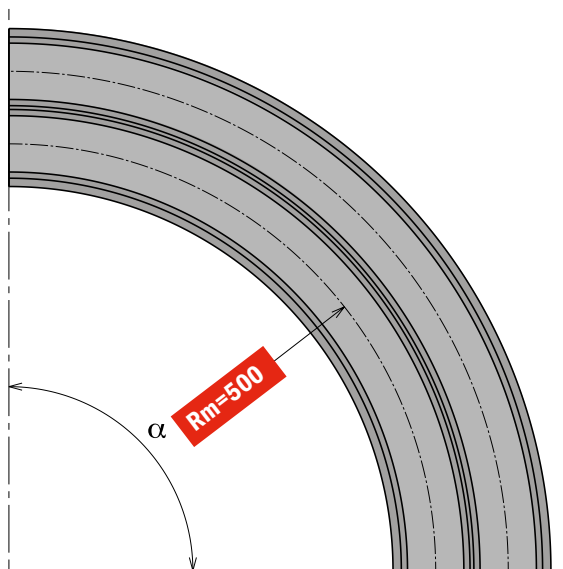


IN & OUT
 AVAILABLE ALSO
 125 mm - 100 mm - 50 mm



Available in
BluLub®

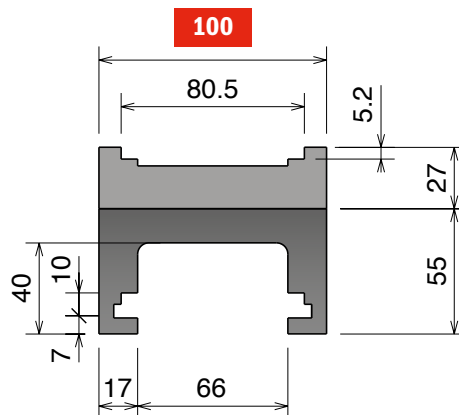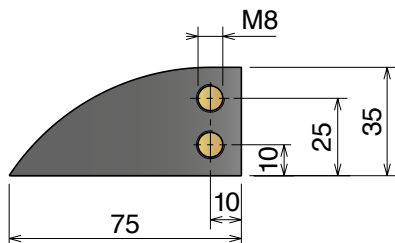

SINGLE TRACK

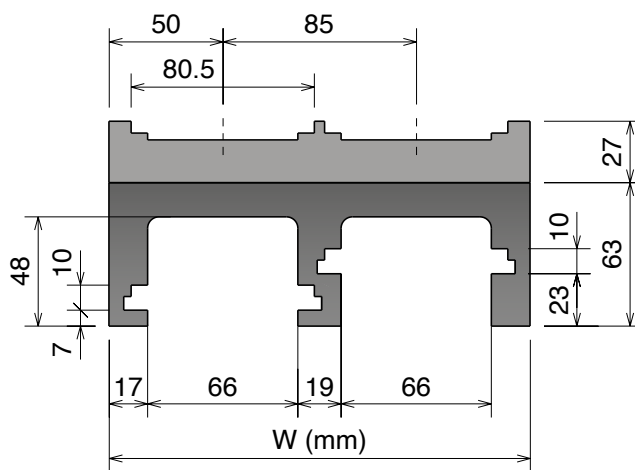

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
750	75011110	75011210	75011310	75011410	75011510	75011610	1	100	Standard codes on table
750	75011120	75011220	75011320	75011420	75011520	75011620	2	185	
750	75011130	75011230	75011330	75011430	75011530	75011630	3	270	add "B" for BluLub®
750	75011140	75011240	75011340	75011440	75011540	75011640	4	355	
750	75011150	75011250	75011350	75011450	75011550	75011650	5	440	add "C" for abrasive
750	75011160	75011260	75011360	75011460	75011560	75011660	6	525	
750	75011170	75011270	75011370	75011470	75011570	75011670	7	610	add "C" for abrasive
750	75011180	75011280	75011380	75011480	75011580	75011680	8	695	

520 M MA6 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

520 M MA6 Series


Chain Reference

520 M - K330

Curva Larghezza Base = 100 mm; Passo = 85 mm



Curve Basic Width = 100 mm; Pitch = 85 mm

Kurve Basisbreite = 100 mm; Teilung = 85 mm

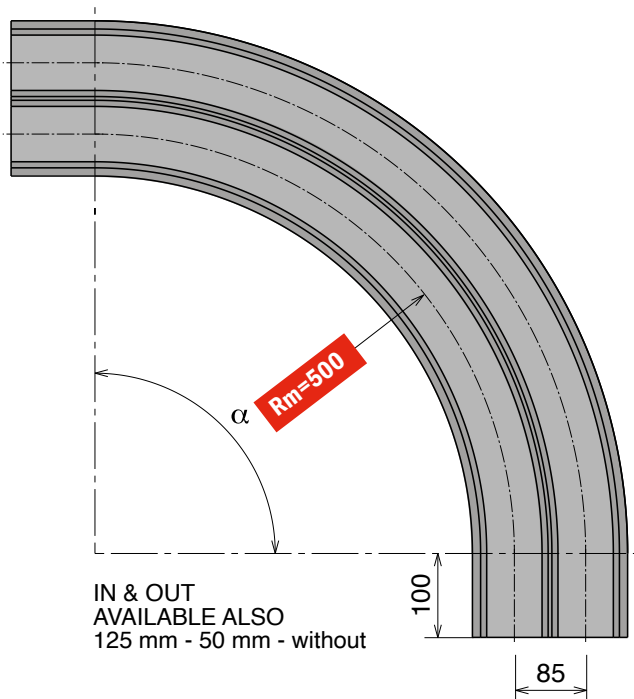

Available in

BluLub®

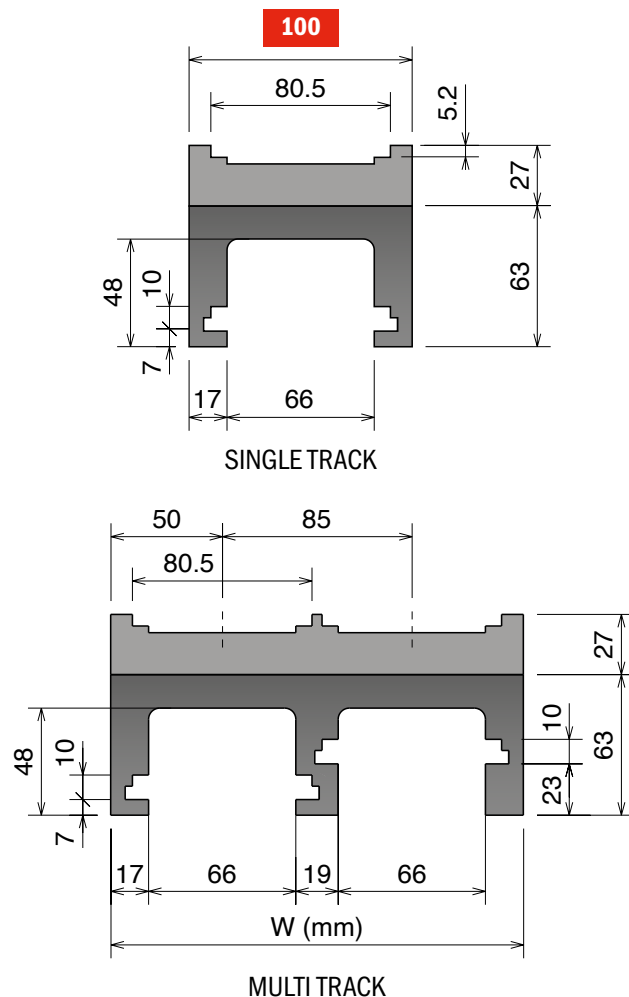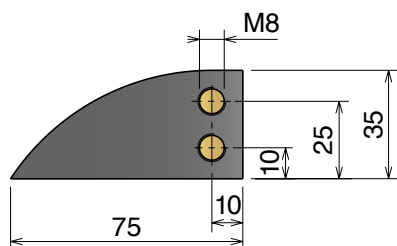

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
750	75011114	75011214	75011314	75011414	75011514	75011614	1	100	 Standard codes on table
750	75011124	75011224	75011324	75011424	75011524	75011624	2	185	
750	75011134	75011234	75011334	75011434	75011534	75011634	3	270	 add "B" for BluLub®
750	75011144	75011244	75011344	75011444	75011544	75011644	4	355	
750	75011154	75011254	75011354	75011454	75011554	75011654	5	440	 add "C" for abrasive
750	75011164	75011264	75011364	75011464	75011564	75011664	6	525	
750	75011174	75011274	75011374	75011474	75011574	75011674	7	610	
750	75011184	75011284	75011384	75011484	75011584	75011684	8	695	

520 M MA4 Series


Chain Reference

520 M - K330



Curva Larghezza Base = 111mm; Passo = 85 mm

Curve Basic Width = 111 mm; Pitch = 85 mm


Kurve Basisbreite = 111 mm; Teilung = 85 mm

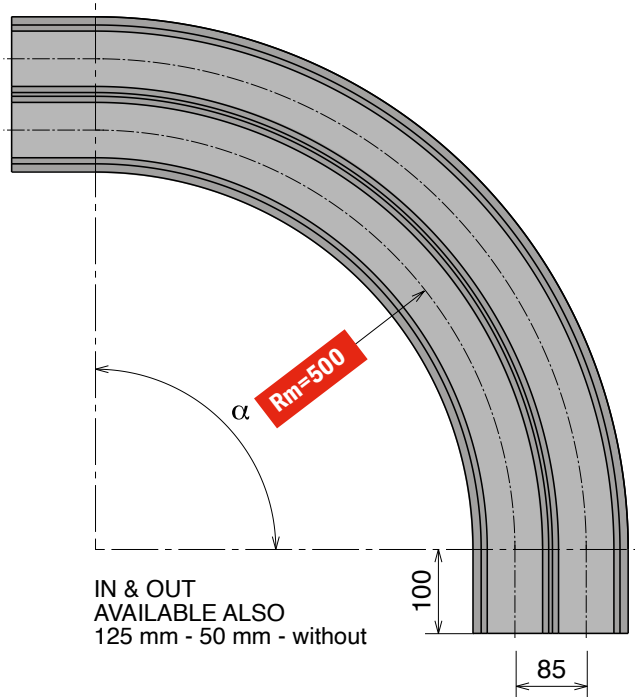

Available in
BluLub®

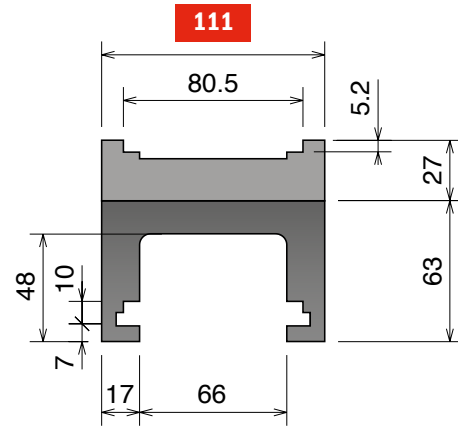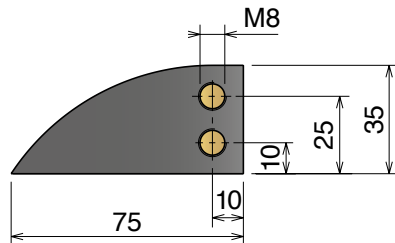

SINGLE TRACK

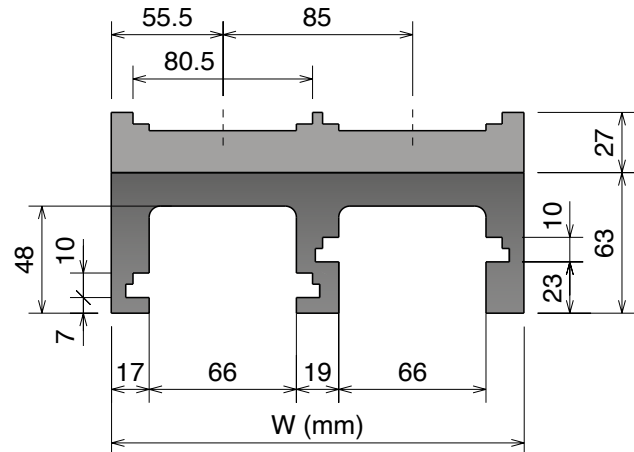

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Tracks	W	Material
751	75111114	75111214	75111314	75111414	75111514	75111614	1	111	Standard codes on table
751	75111124	75111224	75111324	75111424	75111524	75111624	2	196	
751	75111134	75111234	75111334	75111434	75111534	75111634	3	281	add "B" for BluLub®
751	75111144	75111244	75111344	75111444	75111544	75111644	4	366	
751	75111154	75111254	75111354	75111454	75111554	75111654	5	451	add "C" for abrasive
751	75111164	75111264	75111364	75111464	75111564	75111664	6	536	
751	75111174	75111274	75111374	75111474	75111574	75111674	7	621	add "C" for abrasive
751	75111184	75111284	75111384	75111484	75111584	75111684	8	706	

520 M MA8 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

520 M MA8 Series


Chain Reference

520 M - K330



Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm

Kurve Basisbreite = 100 mm; Teilung = 85 mm

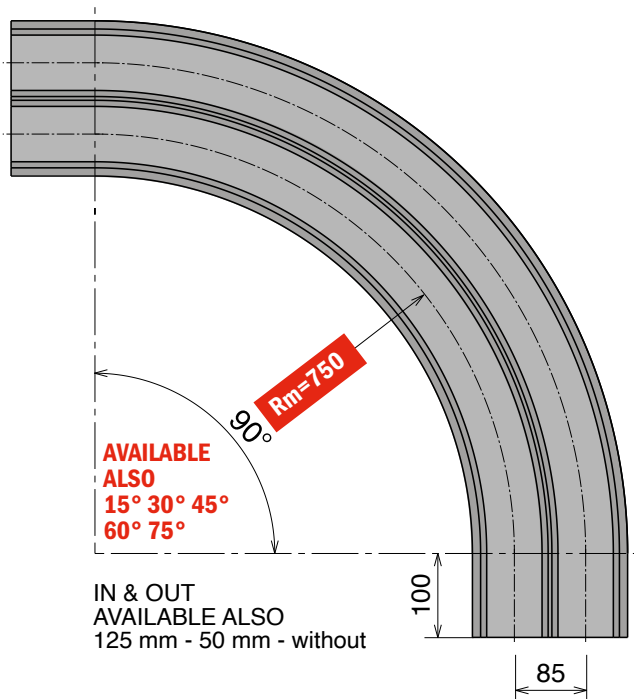

Available in
BluLub®

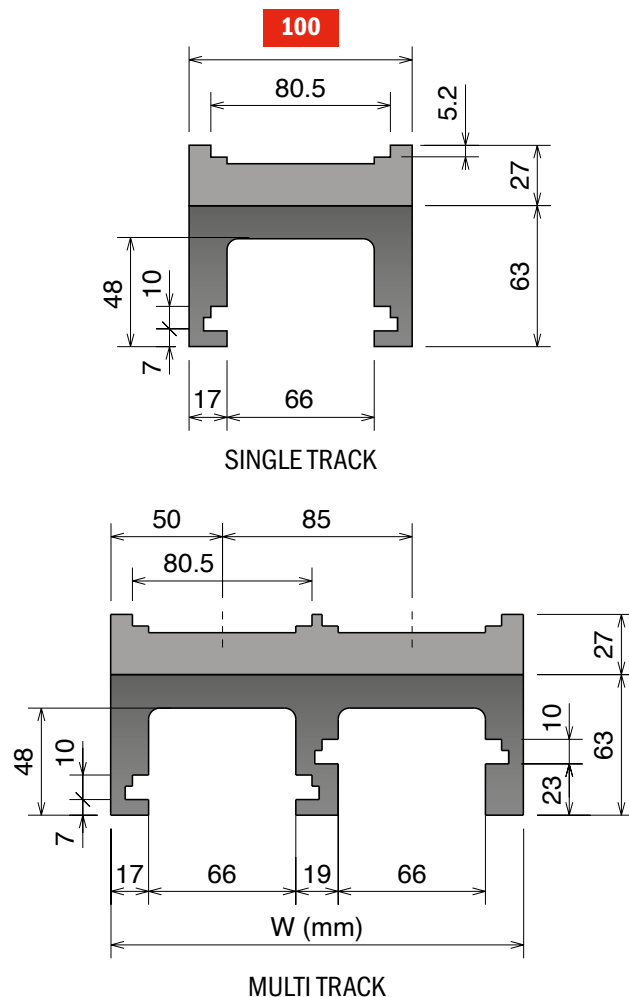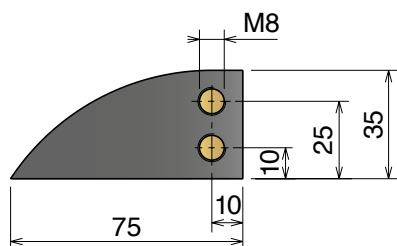

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
750	75016614	1	100	Standard codes on table
750	75016624	2	185	
750	75016634	3	270	add "B" for BluLub®
750	75016644	4	355	
750	75016654	5	440	add "C" for abrasive
750	75016664	6	525	
750	75016674	7	610	
750	75016684	8	695	

520 M MA42 Series


Chain Reference

520 M - K330



Curva Larghezza Base = 111 mm; Passo = 85 mm

Curve Basic Width = 111 mm; Pitch = 85 mm


Kurve Basisbreite = 111 mm; Teilung = 85 mm

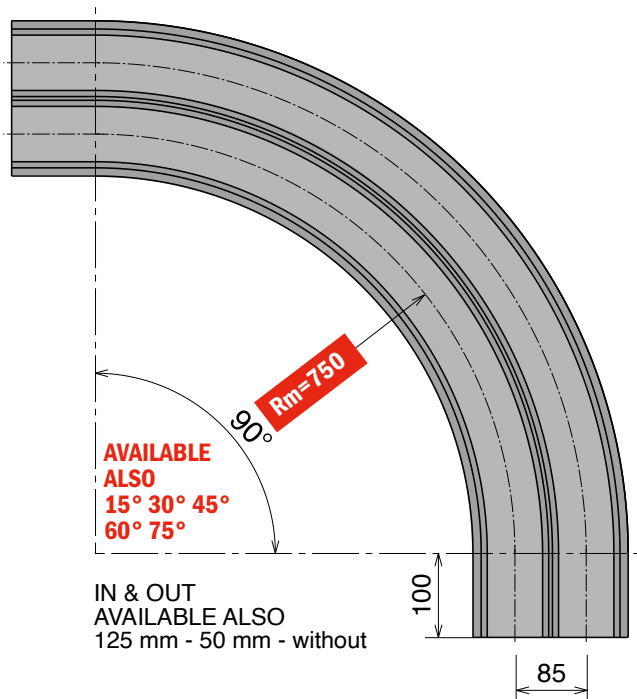

Available in
BluLub®

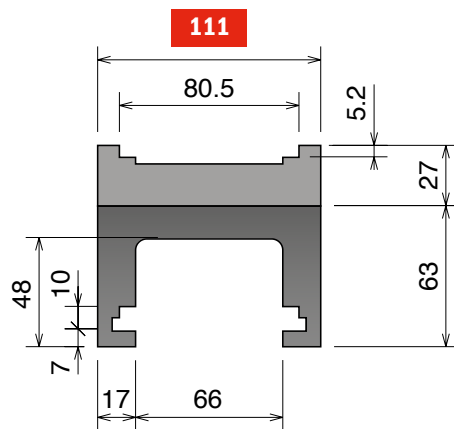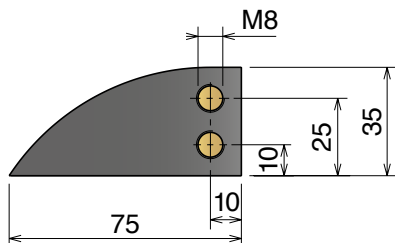

SINGLE TRACK

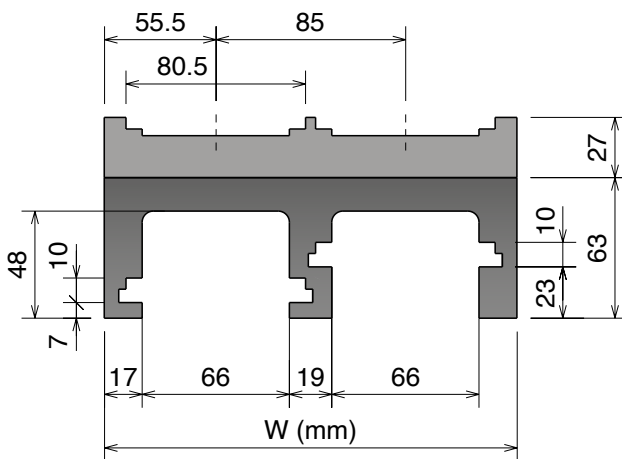

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
751	75116614	1	111	 Standard codes on table
751	75116624	2	196	
751	75116634	3	281	 add "B" for BluLub®
751	75116644	4	366	
751	75116654	5	451	 add "C" for abrasive
751	75116664	6	536	
751	75116674	7	621	
751	75116684	8	706	

520 M MA43 Series

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

520 M MA43 Series


Chain Reference

520 M - K330



Curva Larghezza Base = 111 mm; Passo = 85 mm

Curve Basic Width = 111 mm; Pitch = 85 mm

Kurve Basisbreite = 111 mm; Teilung = 85 mm

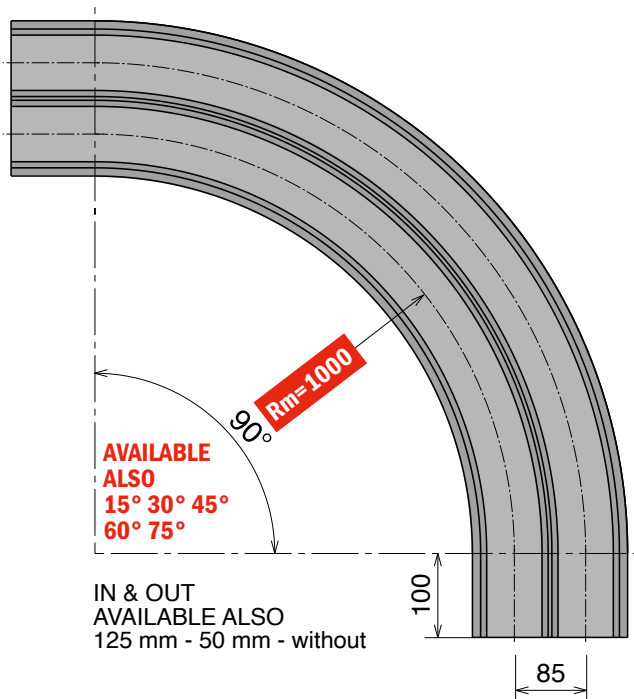

Available in
BluLub®

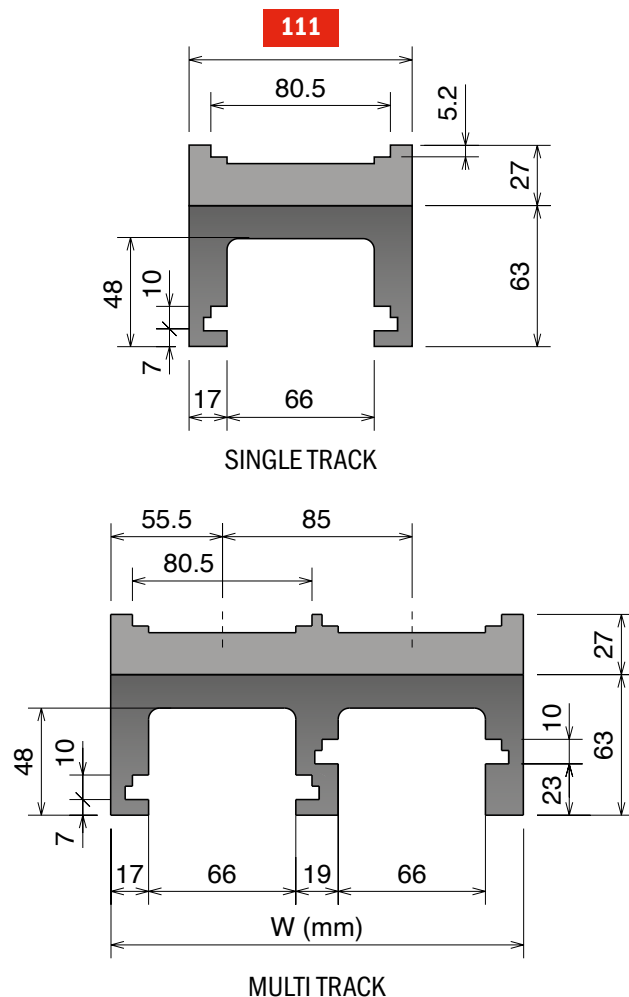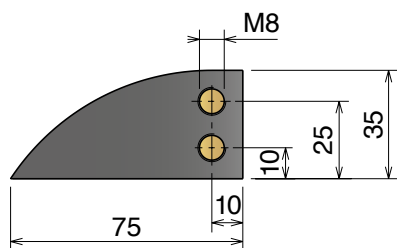

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
751	75119614	1	111	Standard codes on table
751	75119624	2	196	
751	75119634	3	281	add "B" for BluLub®
751	75119644	4	366	
751	75119654	5	451	add "C" for abrasive
751	75119664	6	536	
751	75119674	7	621	
751	75119684	8	706	

520 M MA5D Series


Chain Reference

520 M - K330

Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm

Kurve Basisbreite = 100 mm; Teilung = 85 mm


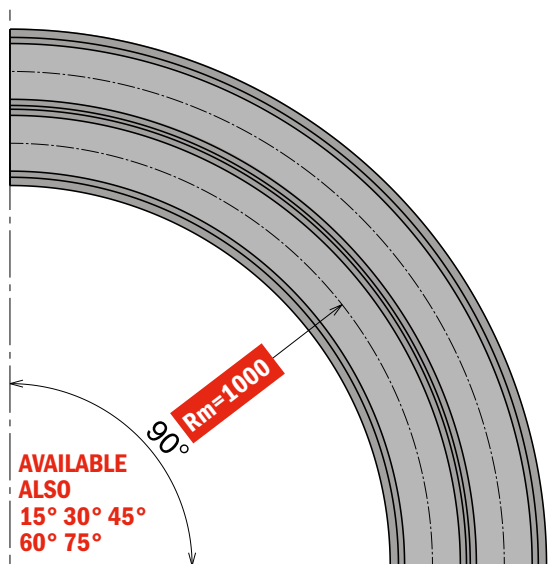


AVAILABLE
ALSO
15° 30° 45°
60° 75°


IN & OUT
AVAILABLE ALSO
125 mm - 100 mm - 50 mm



Available in
BluLub®

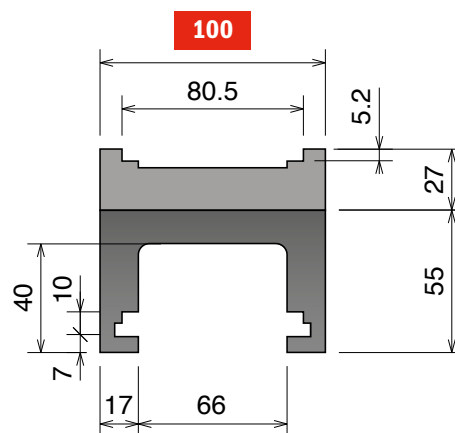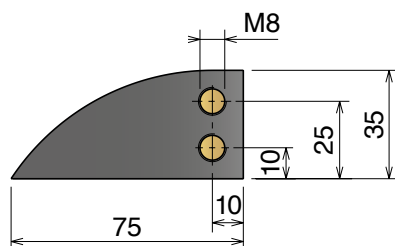

SINGLE TRACK

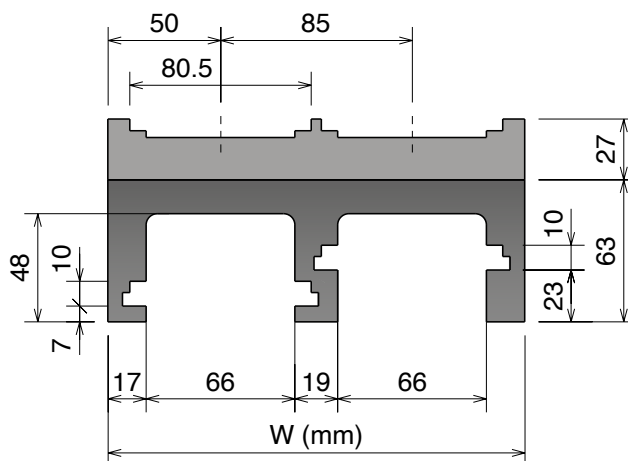

MULTI TRACK

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

MAGNETIC SYSTEM

Part	Article-Nr.	Tracks	W	Material
750	75019610	1	100	 Standard codes on table
750	75019620	2	185	
750	75019630	3	270	 add "B" for BluLub®
750	75019640	4	355	
750	75019650	5	440	 add "C" for abrasive
750	75019660	6	525	
750	75019670	7	610	
750	75019680	8	695	

550 PRO M

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE


550 PRO M

Chain Reference 550 PRO M - K330



Curva Larghezza Base = 100 mm; Passo = 85 mm

Curve Basic Width = 100 mm; Pitch = 85 mm


Kurve Basisbreite = 100 mm; Teilung = 85 mm

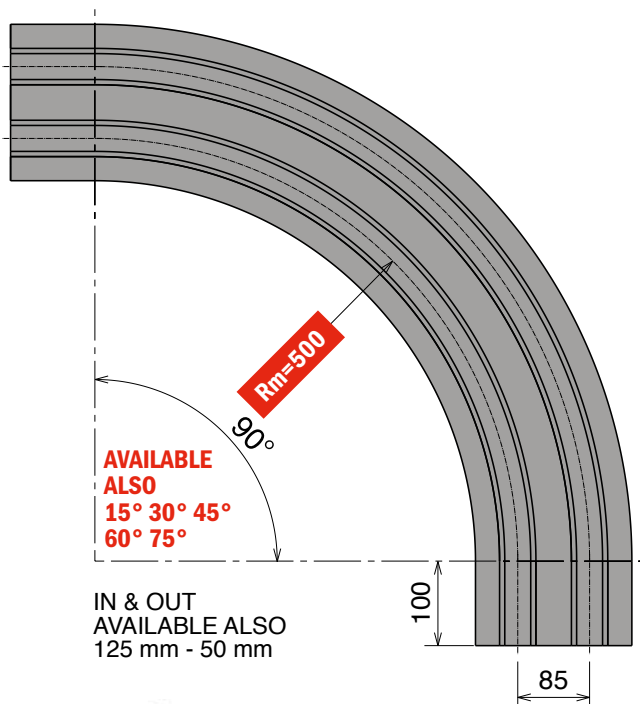

Available in
BluLub®

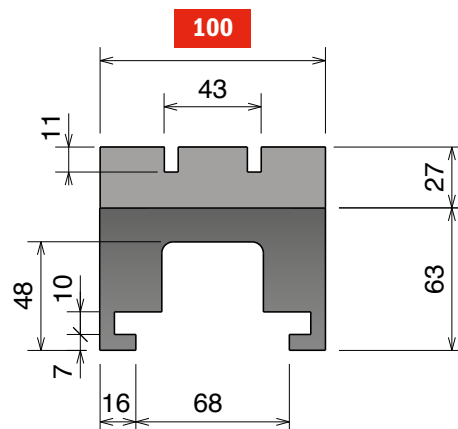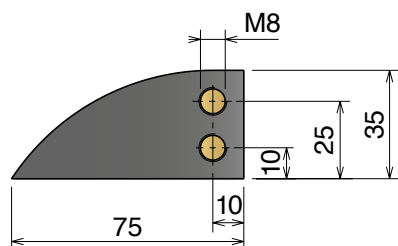

SINGLE TRACK

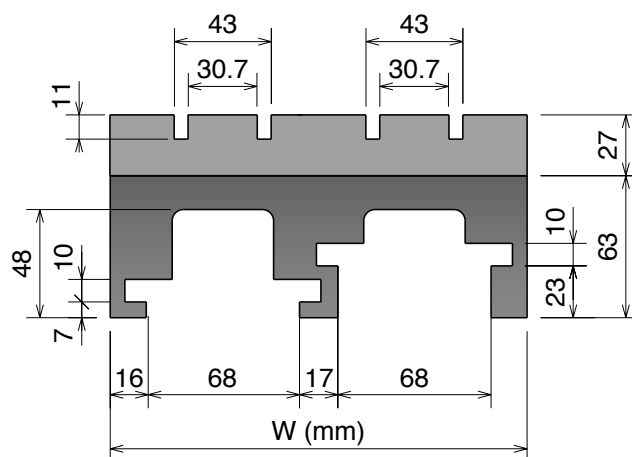

MULTI TRACK

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

MAGNETIC SYSTEM

Part	α 90°	Tracks	W	Material
752	75211614	1	100	Standard codes on table
752	75211624	2	185	
752	75211634	3	270	add "B" for BluLub®
752	75211644	4	355	
752	75211654	5	440	add "C" for abrasive
752	75211664	6	525	
752	75211674	7	610	
752	75211684	8	695	


Part	α 90°	Tracks	W	Material
752	75211614RS	1	100	RS add "RS" for RS-version
752	75211624RS	2	185	
752	75211634RS	3	270	
752	75211644RS	4	355	
752	75211654RS	5	440	
752	75211664RS	6	525	
752	75211674RS	7	610	
752	75211684RS	8	695	

Movex®

878-879-880-881-888-260-261 TAB

Chain Reference 878-879 TAB - K325/K450 880-881 TAB - K325/K450/K750 8881 TAB - K325/K330/K450/K750 888 TAB - W80/140/200 260-261 TAB - K330/K450

Supply: Set of 2 pieces (upper & return)

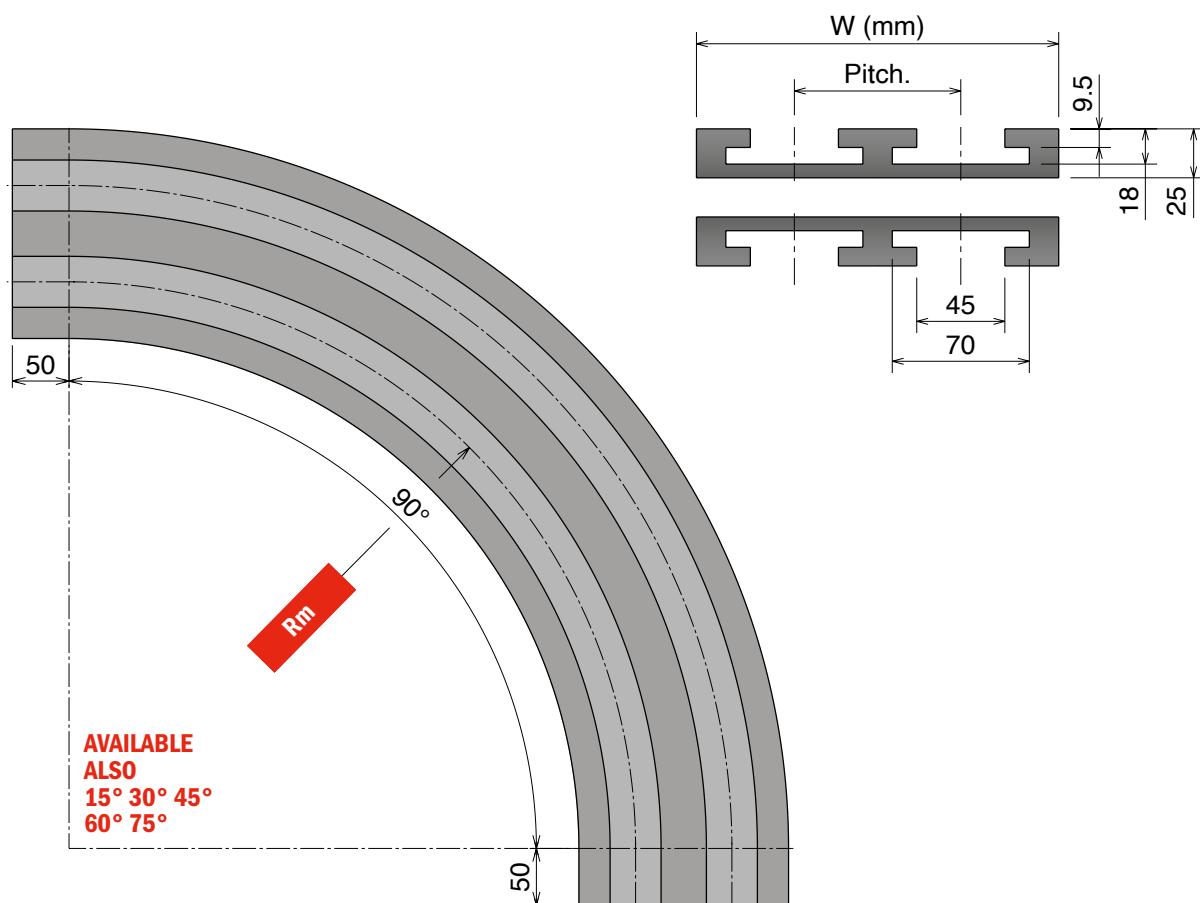

AVAILABLE
 ALSO
 15° 30° 45°
 60° 75°

TAB SYSTEM

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

Part	Rm 500	Rm 610	Rm 800	Rm 1000	Tracks	W	Pitch	Material
K325								 Standard codes on table Upper part:  add “ B ” for <i>BluLub®</i>  add “ C ” for abrasive Upper and return part:  add “ BB ” for <i>BluLub®</i>  add “ CC ” for abrasive
720	72021612	72023612	72027612	72029612	1	100	85	
720	72021622	72023622	72027622	72029622	2	185		
720	72021632	72023632	72027632	72029632	3	270		
720	72021642	72023642	72027642	72029642	4	355		
720	72021652	72023652	72027652	72029652	5	440		
720	72021662	72023662	72027662	72029662	6	525		
K450								
721	72121612	72123612	72127612	72129612	1	130	120	
721	72121622	72123622	72127622	72129622	2	250		
721	72121632	72123632	72127632	72129632	3	370		
721	72121642	72123642	72127642	72129642	4	490		
721	72121652	72123652	72127652	72129652	5	610		
721	72121662	72123662	72127662	72129662	6	730		
K750								
722	72221612	72223612	72227612	72229612	1	200	195	
722	72221622	72223622	72227622	72229622	2	395		
722	72221632	72223632	72227632	72229632	3	590		
722	72221642	72223642	72227642	72229642	4	785		

878 TAB-880 TAB BO

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

NEW 878 TAB - 880 TAB BO

Chain Reference



878 TAB - K325/K450

880 TAB BO - K325/K450

Supply: Set of 2 pieces (upper & return)



pg. 103

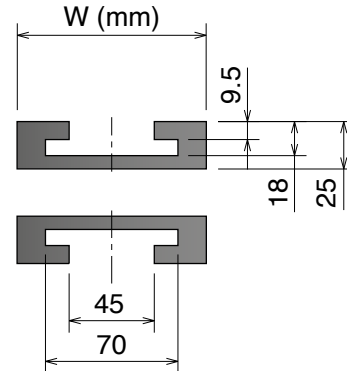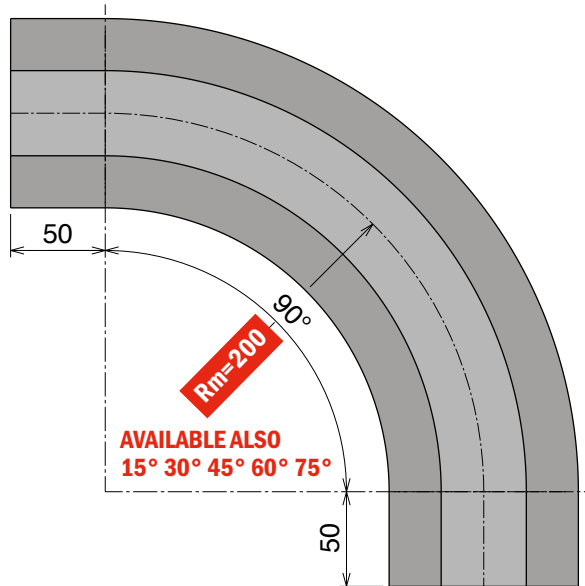

BluLub®
 Strongly recommended

TAB SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	Rm 200	Tracks	W	Material
K325				
744	74420612	1	100	
K450				
745	74520612	1	130	



Standard codes
 on table

Upper part:



add "**B**" for
BluLub®



add "**C**"
 for abrasive

Upper and return part:



add "**BB**" for
BluLub®



add "**CC**"
 for abrasive


NEW

888 TAB

Chain Reference **888 TAB - W80/140/200**

Delivery: **Easy** **Standard**

Supply: Set of 2 pieces (upper & return)

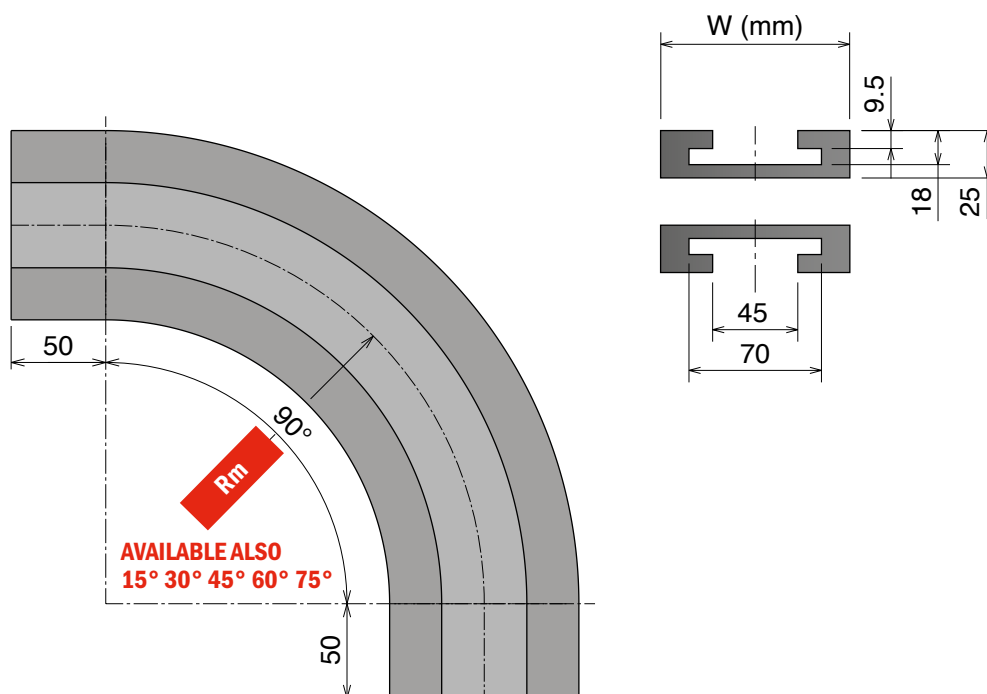

TAB SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.



BluLub®
 Strongly recommended

Part	Rm 200	Rm 500	Tracks	W	Material
W80					
744	74420612	72021612	1	100	
W140					
746	-	74621612	1	155	
W200					
747	-	74721612	1	215	



Standard codes
 on table

Upper part:



add **"B"** for
BluLub®



add **"C"**
 for abrasive

Upper and return part:



add **"BB"** for
BluLub®



add **"CC"**
 for abrasive

882 TAB

Chain Reference


882 TAB - K450/K750/K1000/K1200

Delivery:

Easy

Standard

Supply: Set of 2 pieces (upper & return)

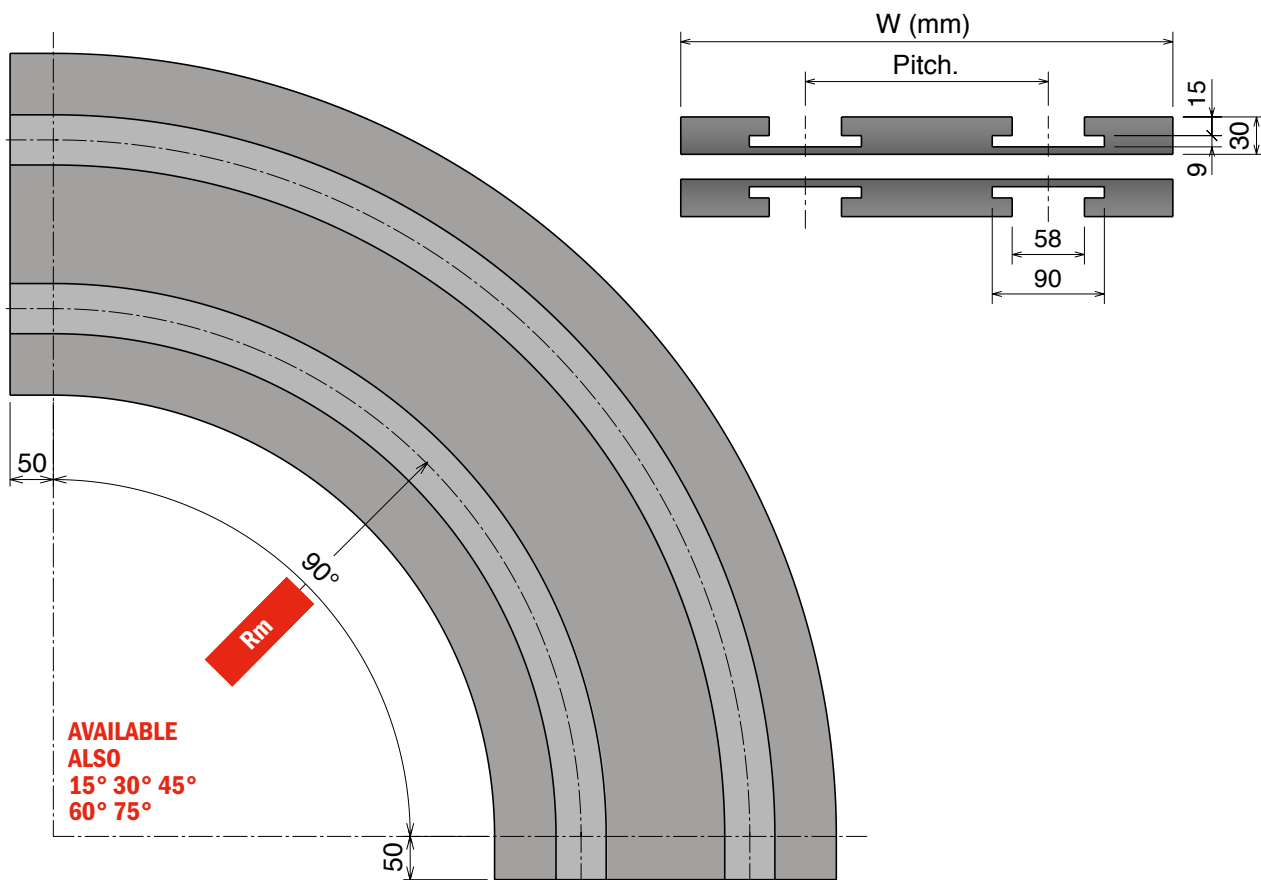

TAB SYSTEM


Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	Rm 610	Rm 800	Rm 1000	Tracks	W	Pitch	Material
K450							 Standard codes on table
727	72723612	72727612	72729612	1	130	120	
727	72723622	72727622	72729622	2	250		
727	72723632	72727632	72729632	3	370		
727	72723642	72727642	72729642	4	490		
K750							 Upper part: add “ B ” for <i>BluLub®</i>  add “ C ” for abrasive
723	72323612	72327612	72329612	1	200	195	
723	72323622	72327622	72329622	2	395		
723	72323632	72327632	72329632	3	590		
723	72323642	72327642	72329642	4	785		
K1000							Upper and return part:  add “ BB ” for <i>BluLub®</i>  add “ CC ” for abrasive
724	72423612	72427612	72429612	1	270	260	
724	72423622	72427622	72429622	2	530		
724	72423632	72427632	72429632	3	790		
724	72423642	72427642	72429642	4	1050		
K1200							
725	72523612	72527612	72529612	1	320	310	
725	72523622	72527622	72529622	2	630		
725	72523632	72527632	72529632	3	940		
725	72523642	72527642	72529642	4	1250		

1873-1874 TAB

Chain Reference 1873 TAB-1874 TAB - K325/K450/K600/K750/K1000/K1200

Supply: Set of 2 pieces (upper & return)

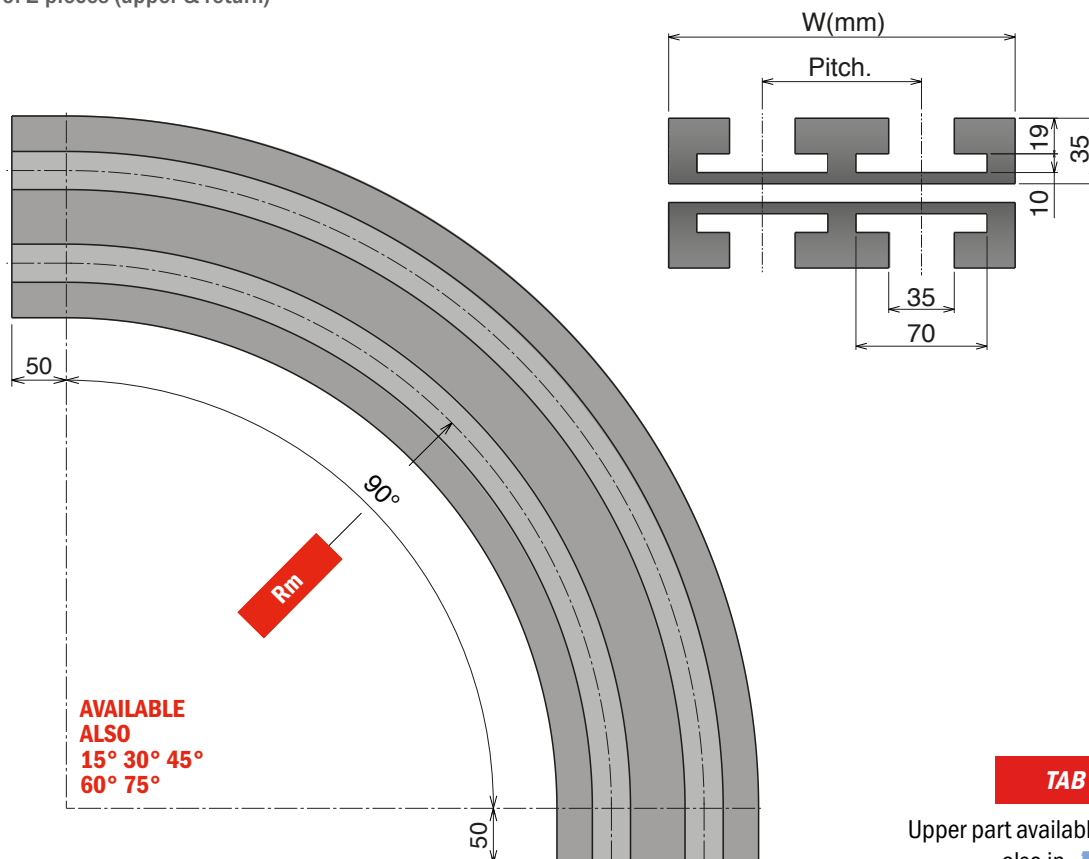

TAB SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	Rm 500	Rm 610	Rm 800	Rm 1000	Tracks	W	Pitch	Material
K325								 Standard codes on table
726	72621612	72623612	72627612	72629612	1	100	85	
726	72621622	72623622	72627622	72629622	2	185		
726	72621632	72623632	72627632	72629632	3	270		
726	72621642	72623642	72627642	72629642	4	355		
K450								 Upper part: add “ B ” for <i>BluLub®</i>  add “ C ” for abrasive
728	72821612	72823612	72827612	72829612	1	130	120	
728	72821622	72823622	72827622	72829622	2	250		
728	72821632	72823632	72827632	72829632	3	370		
728	72821642	72823642	72827642	72829642	4	490		
K600								Upper and return part:  add “ BB ” for <i>BluLub®</i>  add “ CC ” for abrasive
729	72921612	72923612	72927612	72929612	1	170	160	
729	72921622	72923622	72927622	72929622	2	330		
729	72921632	72923632	72927632	72929632	3	490		
729	72921642	72923642	72927642	72929642	4	650		
K750								
737	73721612	73723612	73727612	73729612	1	200	195	
737	73721622	73723622	73727622	73729622	2	395		
737	73721632	73723632	73727632	73729632	3	590		
737	73721642	73723642	73727642	73729642	4	785		
K1000								
738	73821612	73823612	73827612	73829612	1	270	260	
738	73821622	73823622	73827622	73829622	2	530		
K1200								
739	73921612	73923612	73927612	73929612	1	320	310	
739	73921622	73923622	73927622	73929622	2	630		

1843 TAB

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version


Material / Material / Materialien:
 Polietilene UHMW-PE
 Polyethylene UHMW-PE
 Polyäthylen UHMW-PE

1843 TAB

Chain Reference

1843 TAB - K125/K200

Supply: Set of 2 pieces (upper & return)

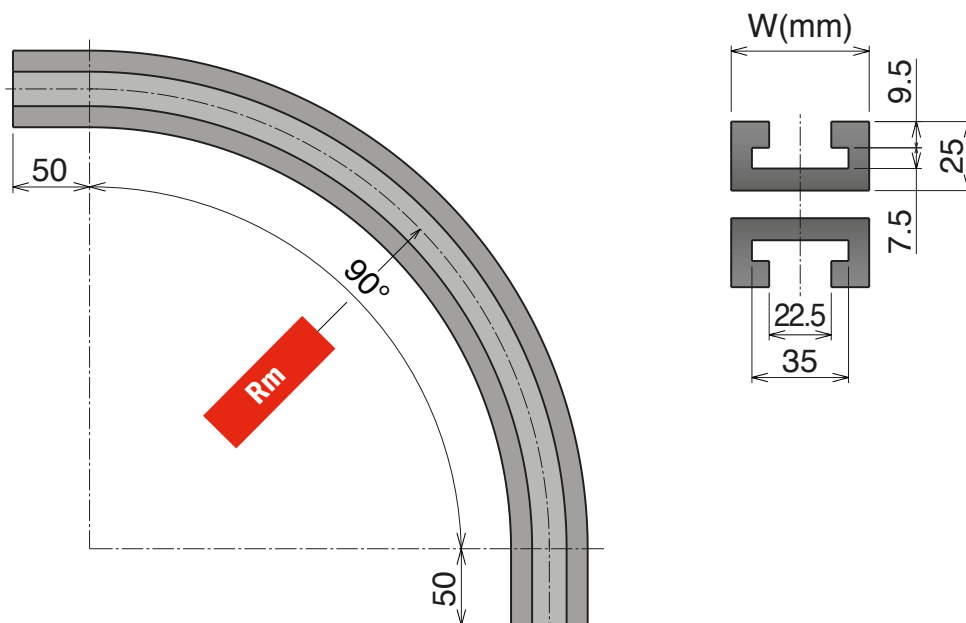

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

TAB SYSTEM

Part	Rm 300	Rm 500	Tracks	W	Material
K125					
740	74020612	74021612	1	50	
K200					
741	74120612	74121612	1	70	



Standard codes
 on table

Upper part:



add "**B**" for
BluLub®



add "**C**"
 for abrasive

Upper and return part:



add "**BB**" for
BluLub®




add "**CC**"
 for abrasive

1701 TAB-1706 TAB



Chain Reference

1701 TAB - 1701 TAB OP - 1701 TAB OPF - 1706 TAB - K55

Supply: Set of 2 pieces (upper & return)



pg. 104/105

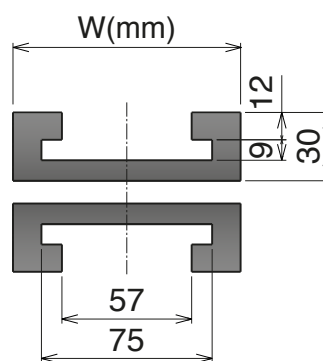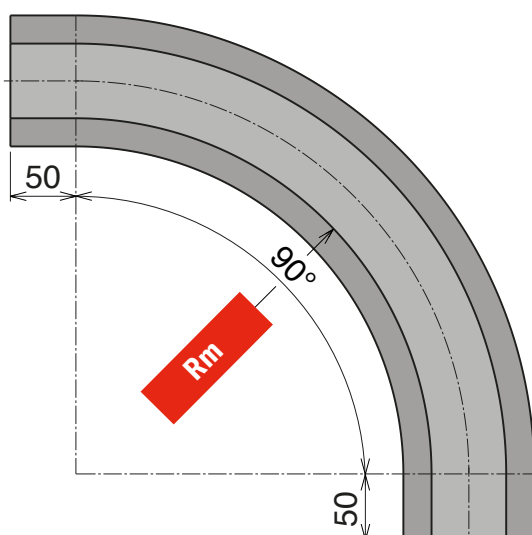

TAB SYSTEM

Upper part available, on request,
 also in **BluLub®**
 and for abrasive applications.

Part	Rm 250	Rm 500	Tracks	W	Material
K55					
742	74220612	74221612	1	100	



Standard codes
 on table

Upper part:



add "**B**" for
BluLub®



add "**C**"
 for abrasive

Upper and return part:



add "**BB**" for
BluLub®



add "**CC**"
 for abrasive

600 Standard and Small radius

Tratti rettilinei / Straight track section / Gerade Schienen

Materiale / Material / Materialien:

Poliethylene UHMW-PE

Polyethylene UHMW-PE

Polyäthylen UHMW-PE


NEW 600 Standard and Small radius

Belt Reference

600 Standard

600 Small radius

Supply: Set of 2 pieces (upper & return)

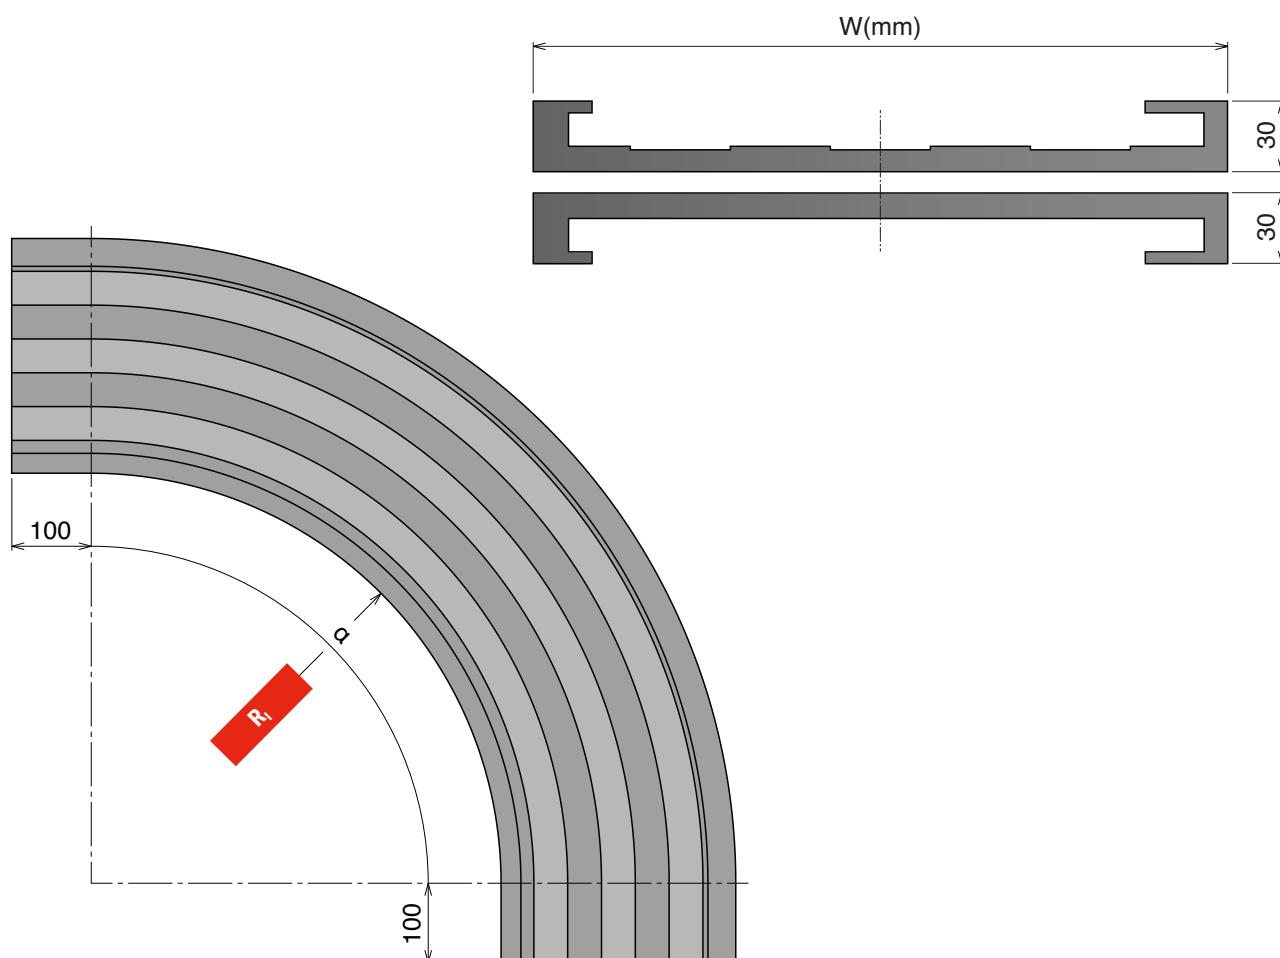

Upper part available, on request,

also in **BluLub**®

add "B" at the end of the code

600 Standard

Part	$\alpha 15^\circ$	$\alpha 30^\circ$	$\alpha 45^\circ$	$\alpha 60^\circ$	$\alpha 75^\circ$	$\alpha 90^\circ$	Curve radius R_1	Curve width W	Min. belt radius R_B	Belt width W_B
760	76041114	76041214	76041314	76041414	76041514	76041614	515	295	510	255
760	76042124	76042224	76042324	76042424	76042524	76042624	685	380	680	340
760	76043134	76043234	76043334	76043434	76043534	76043634	855	465	850	425
760	76044144	76044244	76044344	76044444	76044544	76044644	1025	550	1020	510
760	76045154	76045254	76045354	76045454	76045554	76045654	1195	635	1190	595
760	76046164	76046264	76046364	76046464	76046564	76046664	1365	720	1360	680
760	76047174	76047274	76047374	76047474	76047574	76047674	1535	805	1530	765
760	76048184	76048284	76048384	76048484	76048584	76048684	1705	890	1700	850

600 Small radius

Part	$\alpha 15^\circ$	$\alpha 30^\circ$	$\alpha 45^\circ$	$\alpha 60^\circ$	$\alpha 75^\circ$	$\alpha 90^\circ$	Curve radius R_1	Curve width W	Min. belt radius R_B	Belt width W_B
760	76051124	76051224	76051324	76051424	76051524	76051624	405	380	400	340
760	76052134	76052234	76052334	76052434	76052534	76052634	505	465	500	425
760	76053144	76053244	76053344	76053444	76053544	76053644	605	550	600	510
760	76054154	76054254	76054354	76054454	76054554	76054654	725	635	720	595
760	76055164	76055264	76055364	76055464	76055564	76055664	885	720	880	680
760	76056174	76056274	76056374	76056474	76056574	76056674	1045	805	1040	765
760	76057184	76057284	76057384	76057484	76057584	76057684	1205	890	1200	850

NEW


600 Standard and Small radius - TAB Version

Belt Reference

600 Standard - TAB / Reverse TAB / TAB reverse TAB

600 Small radius - TAB / Reverse TAB / TAB reverse TAB

Supply: Set of 2 pieces (upper & return)

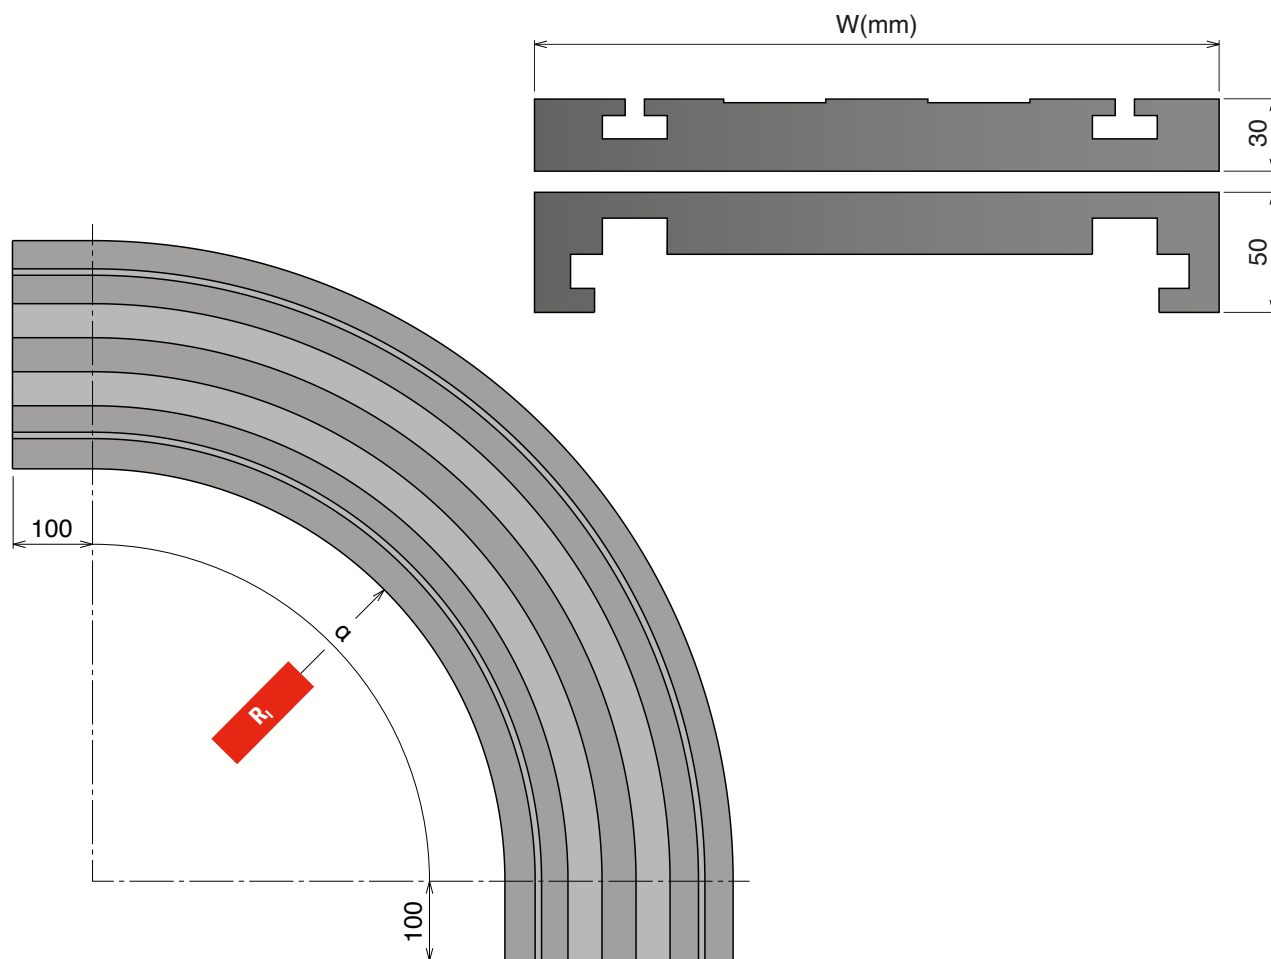

Upper part available, on request,

also in **BluLub**®

add "B" at the end of the code

600 Standard - TAB / Reverse TAB / TAB reverse TAB

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Curve radius R _I	Curve width W	Min. belt radius R _B	Belt width W _B
761	76141114	76141214	76141314	76141414	76141514	76141614	515	285	510	255
761	76142124	76142224	76142324	76142424	76142524	76142624	685	370	680	340
761	76143134	76143234	76143334	76143434	76143534	76143634	855	455	850	425
761	76144144	76144244	76144344	76144444	76144544	76144644	1025	540	1020	510
761	76145154	76145254	76145354	76145454	76145554	76145654	1195	625	1190	595
761	76146164	76146264	76146364	76146464	76146564	76146664	1365	710	1360	680
761	76147174	76147274	76147374	76147474	76147574	76147674	1535	795	1530	765
761	76148184	76148284	76148384	76148484	76148584	76148684	1705	880	1700	850

600 Small radius - TAB / Reverse TAB / TAB reverse TAB

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Curve radius R _I	Curve width W	Min. belt radius R _B	Belt width W _B
761	76151124	76151224	76151324	76151424	76151524	76151624	405	370	400	340
761	76152134	76152234	76152334	76152434	76152534	76152634	505	455	500	425
761	76153144	76153244	76153344	76153444	76153544	76153644	605	540	600	510
761	76154154	76154254	76154354	76154454	76154554	76154654	725	625	720	595
761	76155164	76155264	76155364	76155464	76155564	76155664	885	710	880	680
761	76156174	76156274	76156374	76156474	76156574	76156674	1045	795	1040	765
761	76157184	76157284	76157384	76157484	76157584	76157684	1205	880	1200	850

600 Heavy duty and Heavy duty/Small radius

Tratti rettilinei / Straight track section / Gerade Schienen

Materiale / Material / Materialien:
 Polietilene UHMW-PE / **BluLub**
 Polyethylene UHMW-PE / **BluLub**
 Polyäthylen UHMW-PE / **BluLub**


NEW 600 Heavy duty and Heavy duty/Small radius

Belt Reference

600 Heavy duty

600 Heavy duty / Small radius

Supply: Set of 2 pieces (upper & return)

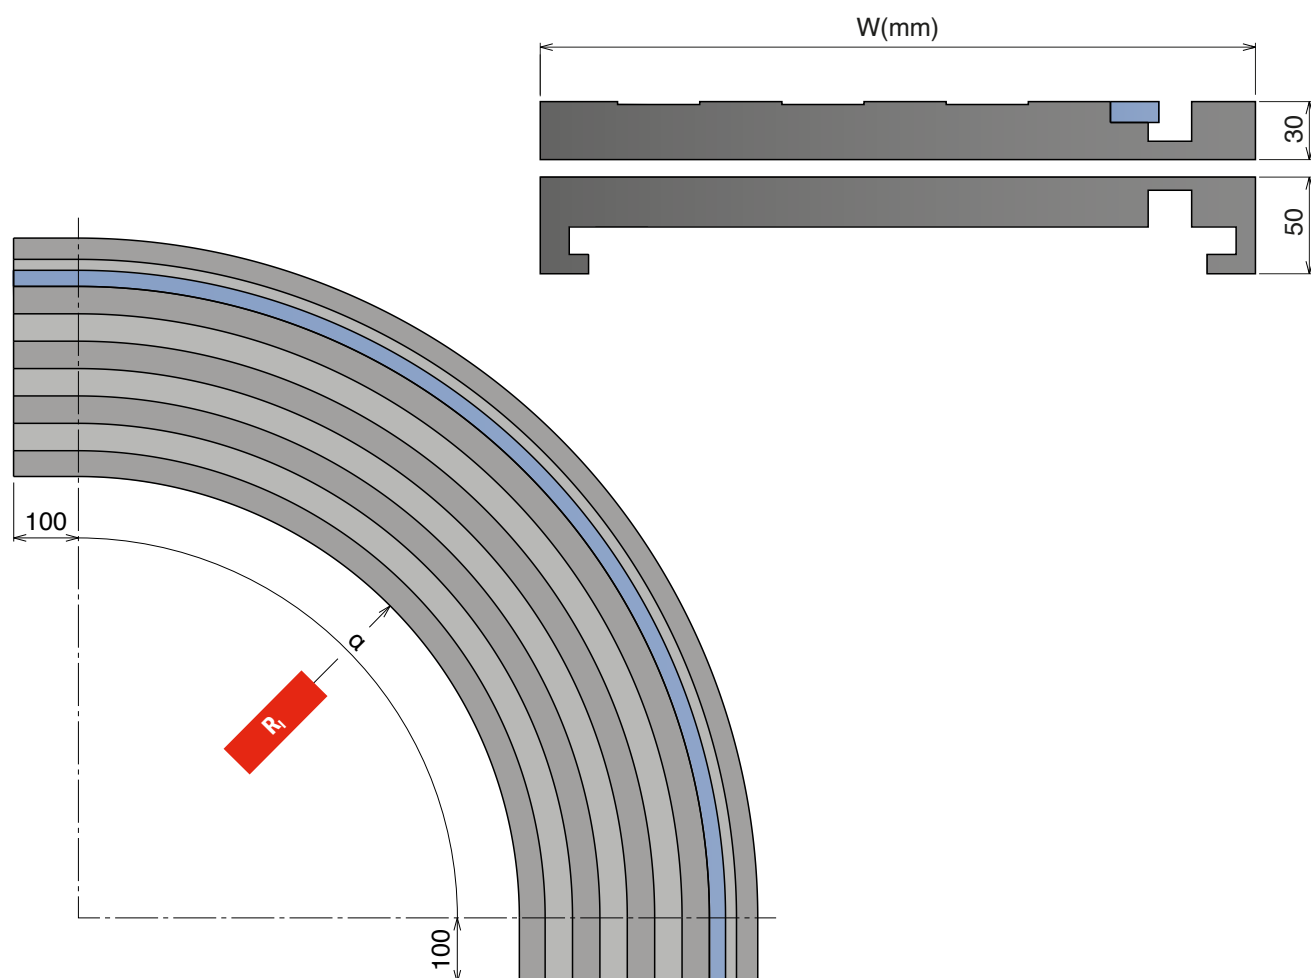

600 Heavy duty

Standard with **BluLub**® strip for minimized friction

Part	$\alpha 15^\circ$	$\alpha 30^\circ$	$\alpha 45^\circ$	$\alpha 60^\circ$	$\alpha 75^\circ$	$\alpha 90^\circ$	Curve radius R_1	Curve width W	Min. belt radius R_B	Belt width W_B
762	76241114	76241214	76241314	76241414	76241514	76241614	515	285	510	255
762	76242124	76242224	76242324	76242424	76242524	76242624	685	370	680	340
762	76243134	76243234	76243334	76243434	76243534	76243634	855	455	850	425
762	76244144	76244244	76244344	76244444	76244544	76244644	1025	540	1020	510
762	76245154	76245254	76245354	76245454	76245554	76245654	1195	625	1190	595
762	76246164	76246264	76246364	76246464	76246564	76246664	1365	710	1360	680
762	76247174	76247274	76247374	76247474	76247574	76247674	1535	795	1530	765
762	76248184	76248284	76248384	76248484	76248584	76248684	1705	880	1700	850

600 Heavy duty/Small radius

Part	$\alpha 15^\circ$	$\alpha 30^\circ$	$\alpha 45^\circ$	$\alpha 60^\circ$	$\alpha 75^\circ$	$\alpha 90^\circ$	Curve radius R_1	Curve width W	Min. belt radius R_B	Belt width W_B
762	76250114	76250214	76250314	76250414	76250514	76250614	395	285	390	255
762	76251124	76251224	76251324	76251424	76251524	76251624	425	370	420	340
762	76252134	76252234	76252334	76252434	76252534	76252634	505	455	500	425
762	76253144	76253244	76253344	76253444	76253544	76253644	605	540	600	510
762	76254154	76254254	76254354	76254454	76254554	76254654	725	625	720	595
762	76255164	76255264	76255364	76255464	76255564	76255664	885	710	880	680
762	76256174	76256274	76256374	76256474	76256574	76256674	1045	795	1040	765
762	76257184	76257284	76257384	76257484	76257584	76257684	1205	880	1200	850


NEW 600 with Bearings

Belt Reference

600 Heavy duty with Bearings

600 Heavy duty/Small radius with Bearings

Supply: Set of 2 pieces (upper & return)

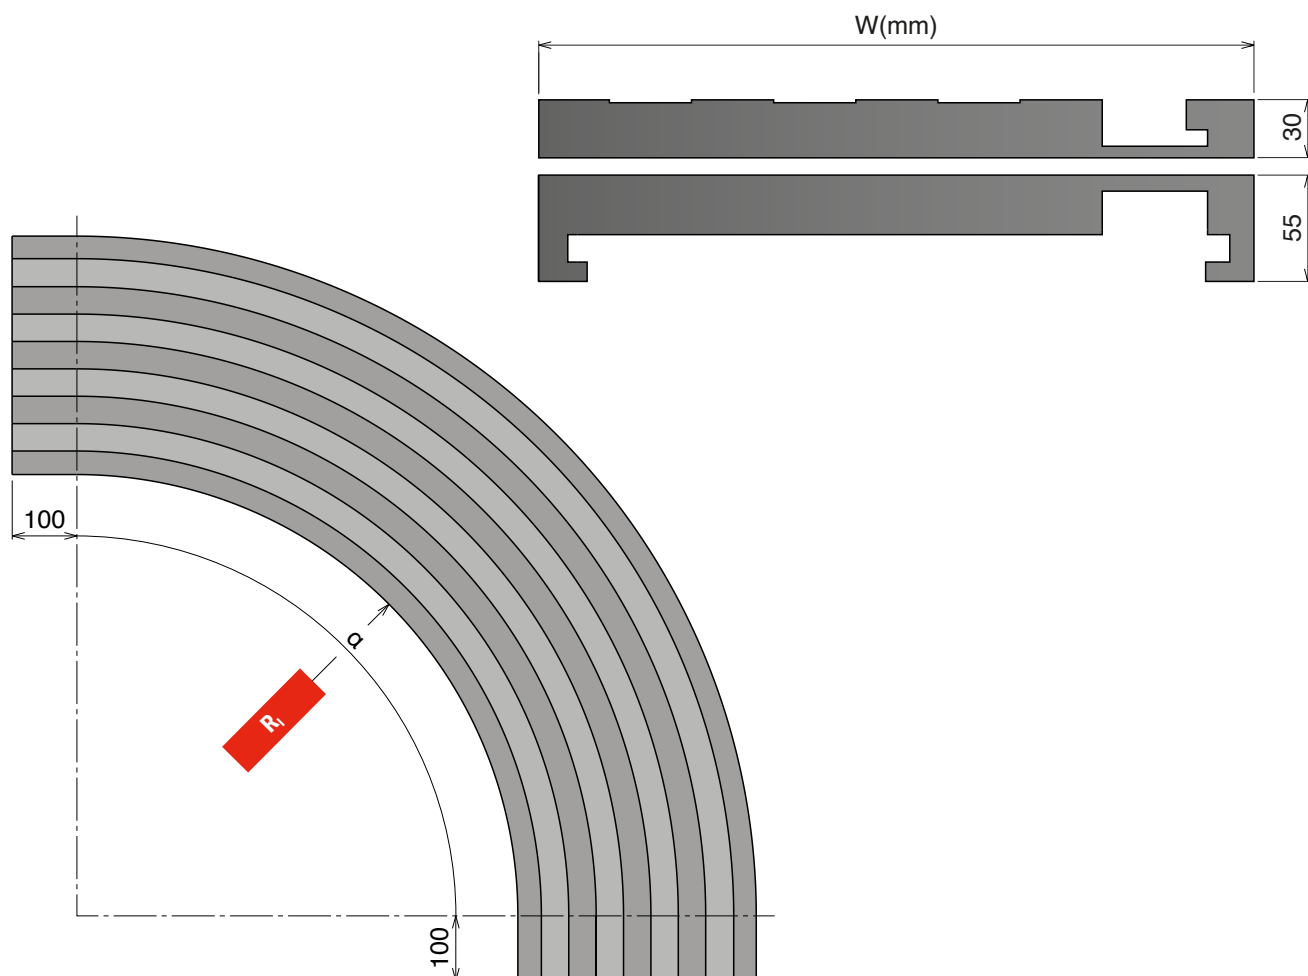

Upper part available, on request,
also in **BluLub®**
add "B" at the end of the code

600 Heavy duty with Bearings

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Curve radius R _I	Curve width W	Min. belt radius R _B	Belt width W _B
763	76341114	76341214	76341314	76341414	76341514	76341614	515	285	510	255
763	76342124	76342224	76342324	76342424	76342524	76342624	685	370	680	340
763	76343134	76343234	76343334	76343434	76343534	76343634	855	455	850	425
763	76344144	76344244	76344344	76344444	76344544	76344644	1025	540	1020	510
763	76345154	76345254	76345354	76345454	76345554	76345654	1195	625	1190	595
763	76346164	76346264	76346364	76346464	76346564	76346664	1365	710	1360	680
763	76347174	76347274	76347374	76347474	76347574	76347674	1535	795	1530	765
763	76348184	76348284	76348384	76348484	76348584	76348684	1705	880	1700	850

600 Heavy duty/Small radius with Bearings

Part	α 15°	α 30°	α 45°	α 60°	α 75°	α 90°	Curve radius R _i	Curve width W	Min. belt radius R _B	Belt width W _B
763	76350114	76350214	76350314	76350414	76350514	76350614	395	285	390	255
763	76351124	76351224	76351324	76351424	76351524	76351624	425	370	420	340
763	76352134	76352234	76352334	76352434	76352534	76352634	505	455	500	425
763	76353144	76353244	76353344	76353444	76353544	76353644	605	540	600	510
763	76354154	76354254	76354354	76354454	76354554	76354654	725	625	720	595
763	76355164	76355264	76355364	76355464	76355564	76355664	885	710	880	680
763	76356174	76356274	76356374	76356474	76356574	76356674	1045	795	1040	765
763	76357184	76357284	76357384	76357484	76357584	76357684	1205	880	1200	850

880-881-8811 B

Curve magnetiche, Tab & Bevel / Magnetic, Tab & Bevel corner tracks / Kurvenführungen Magnet, Tab & Bevel Version

Materiale / Material / Materialien:
Polietilene UHMW-PE
Polyethylene UHMW-PE
Polyäthylen UHMW-PE

880-881-8881 B


Chain Reference

880 B - K325

881 B - K325

8881 B - K325

Supply: Set of 3 pieces (upper, return & plate)

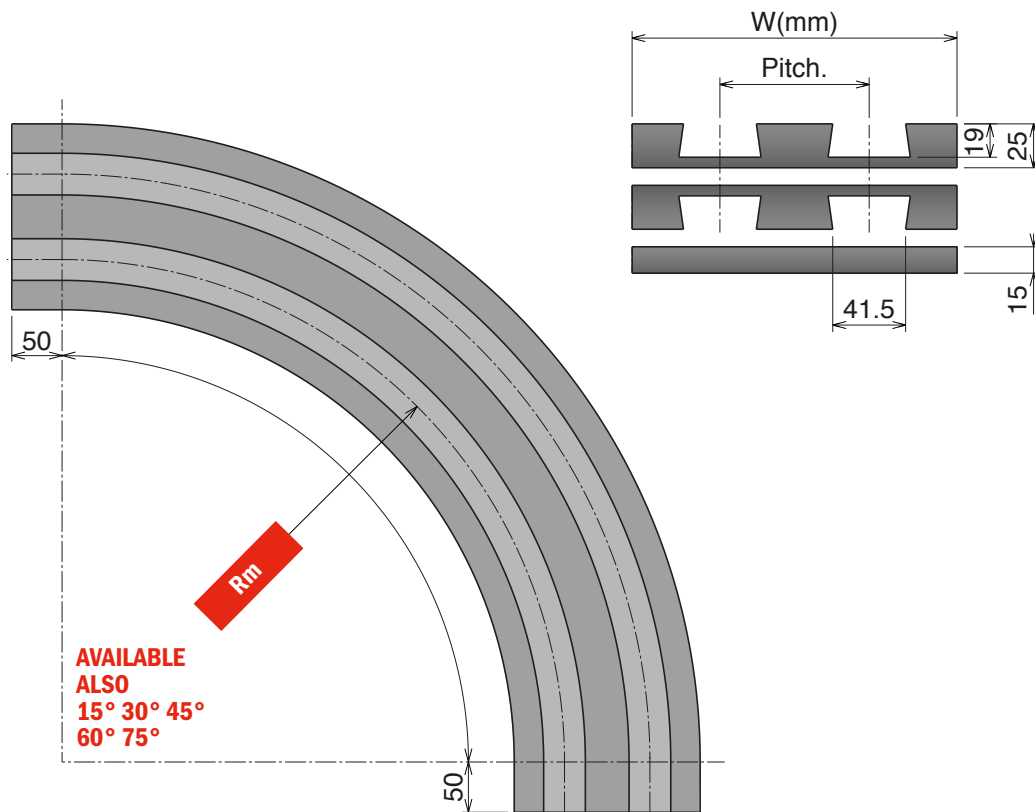

BEVEL SYSTEM

Upper part available, on request,
also in **BluLub®**
and for abrasive applications.

Part	Rm 500	Rm 610	Rm 800	Rm 1000	Tracks	W	Pitch	Material
K325								
770	77031612	77033612	77037612	77039612	1	100	85	
770	77031622	77033622	77037622	77039622	2	185		
770	77031632	77033632	77037632	77039632	3	270		
770	77031642	77033642	77037642	77039642	4	355		
770	77031652	77033652	77037652	77039652	5	440		
770	77031662	77033662	77037662	77039662	6	525		



Standard codes
on table

Upper part:



add **"B"** for
BluLub®



add **"C"**
for abrasive



Upper and return part:

add **"BB"** for
BluLub®



add **"CC"**
for abrasive

878-879-880-881-888-260-261 TAB

Chain Reference 878-879 TAB - K325/K450


880-881-8811 TAB - K325/K450/K750

888 TAB - W80/140/200

260-261 TAB - K330/K450

Supply: 1 pieces

Straight track section

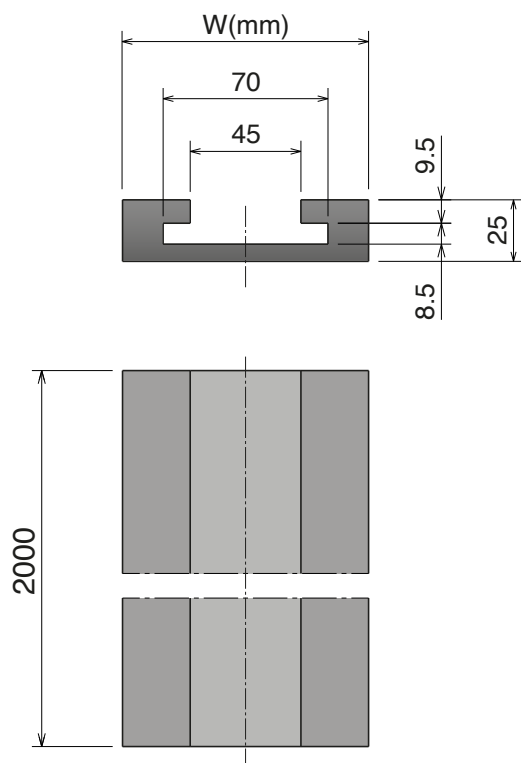

Straight track available, on request,
 also in **BluLub®**
 and for abrasive applications.

TAB SYSTEM


Part	Article-Nr.	W	Length	Material
K325/W80				 Standard codes on table
790	79023010	100	2000	
K450				 add “ B ” for <i>BluLub®</i>
790	79024010	130	2000	
W140				 add “ C ” for abrasive
796	79620110	155	2000	
K750				
790	79026010	200	2000	
W200				
796	79622110	215	2000	

882 TAB Straight track section

Chain Reference 882 TAB - K450/K750/K1000/K1200

Delivery: Easy Standard

Supply: 1 pieces

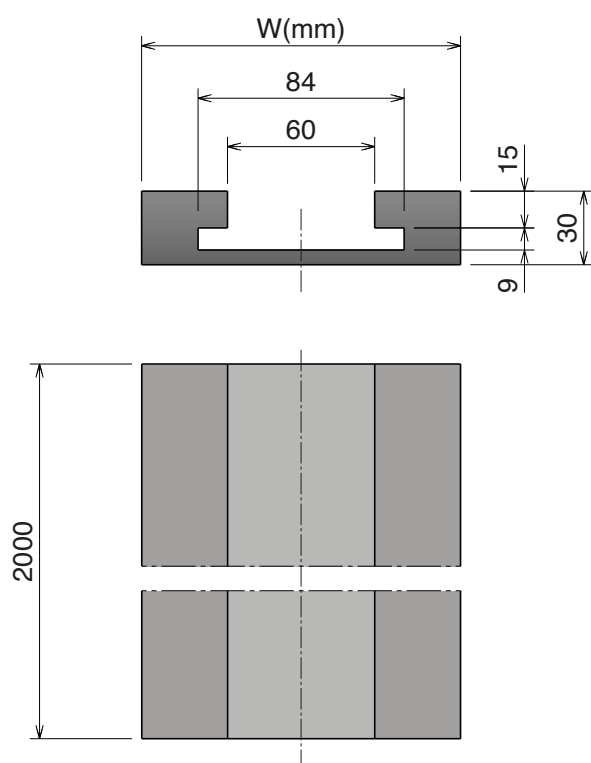

Straight track available, on request,
 also in **BluLub®**
 and for abrasive applications.

TAB SYSTEM

Part	Article-Nr.	W	Length	Material
K450				 Standard codes on table
791	79124010	130	2000	
K750				 add " B " for <i>BluLub®</i>
791	79126010	200	2000	
K1000				 add " C " for abrasive
791	79127010	270	2000	
K1200				
791	79128010	320	2000	

1873-1874 TAB Straight track section

Chain Reference


1873 TAB-1874 TAB - K325/K450/K600/K750/K1000/K1200

Delivery:

Easy

Standard

Supply: 1 pieces

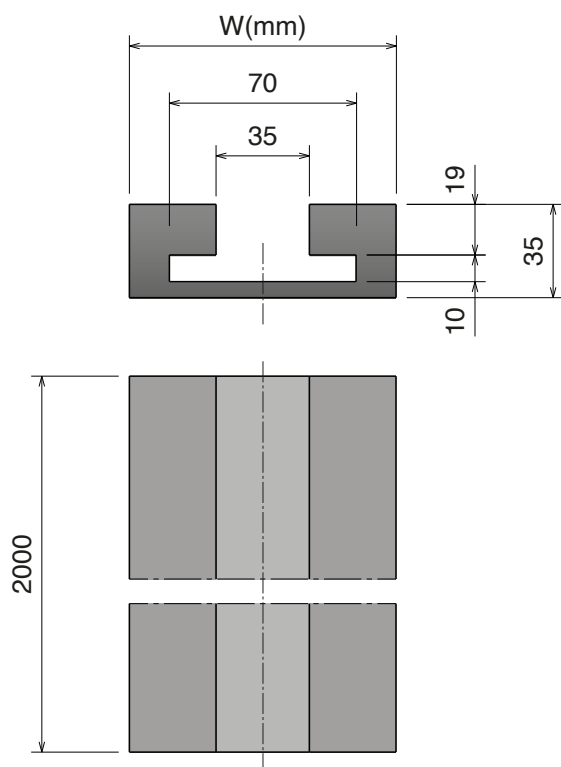

Straight track available, on request,
also in **BluLub®**
and for abrasive applications.

TAB SYSTEM


Part	Article-Nr.	W	Length	Material
K325				 Standard codes on table
792	79223010	100	2000	
K450				 add "B" for <i>BluLub®</i>
792	79224010	130	2000	
K600				 add "C" for abrasive
792	79225010	170	2000	
K750				
792	79226010	200	2000	
K1000				
792	79227010	270	2000	
K1200				
792	79228010	320	2000	

1843 TAB Straight track section

Chain Reference

1843 TAB - K125/K200

Supply: 1 pieces

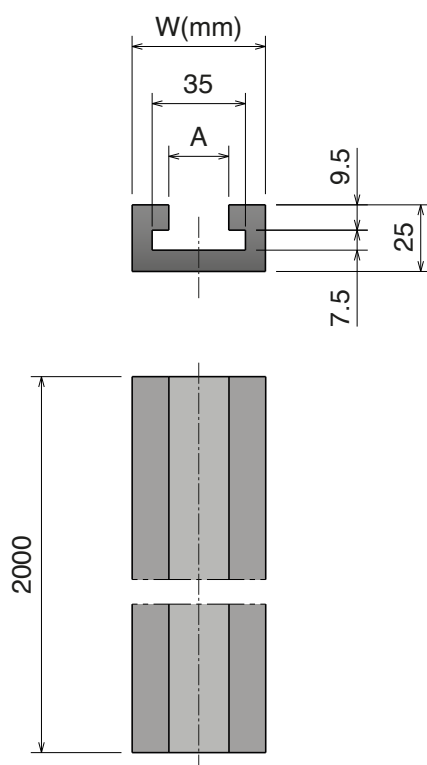

Straight track available, on request,
also in **BluLub®**
and for abrasive applications.

TAB SYSTEM


Part	Article-Nr.	W	A	Length	Material
K125					Standard codes on table
793	79321010	50	22,5	2000	
K200					add "B" for BluLub®
793	79322010	70	22,3	2000	
					add "C" for abrasive

1701 TAB-1706 TAB *Straight track section*

Chain Reference

1701 TAB - 1701 TAB OP- 1706 TAB - K55

Supply: 1 pieces

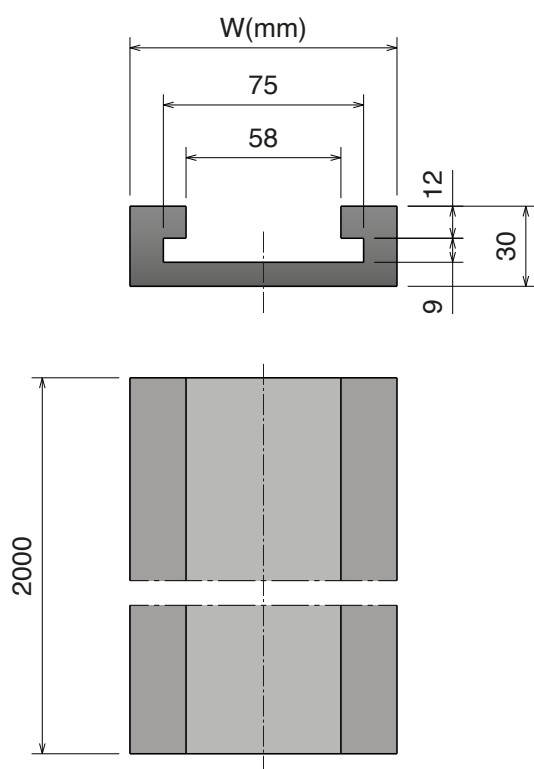

Straight track available, on request,
also in **BluLub®**
and for abrasive applications.

TAB SYSTEM

Part	Article-Nr.	W	Length	Material
K55				
794	79420010	100	2000	



Standard codes
on table



add "**B**" for
BluLub®



add "**C**"
for abrasive

PFX is the plastic material specifically developed for chains and belts in order to run with limited lubrication or in dry applications where the demands are extreme concerning speed, performance & efficiency.


Realizing the many advantages and the versatility of our plastic compound, a growing number of companies are implementing **PFX** into their production lines with excellent results. Contact us, and request a free quotation!

Modular belts available:

Other different types of product in PFX are on request.



520 FT



520 HD FT



520 PRO LBP




520 M



525 HD FT



525 HD FG



530 PRO LBP



**550 FT &
One track belt**



**550 FG &
One track belt**



550 PRO FT



550 PRO M



551 FT



551 PRO LBP



260 M FT



260 M FG



260 TAB



261 M FT



261 TAB



Low friction

Developed to reduce friction between chain and product, and chain and wearstrip.



High performance

Longer wear life lead to excellent and long enduring product handling features.



Minimal dusting

Developed to avoid dusting under extreme circumstances.



Control of cost

Better control of total cost & sustainable conveyor technology.



Food contact Certified

PFX material is suitable in food application.



Patented material

PFX is an exclusive product of Movex.

Energy saving


Low friction

High efficiency

High visibility


FDA APPROVAL

For belt sprockets position refers to Movex engineering manual available on our website.

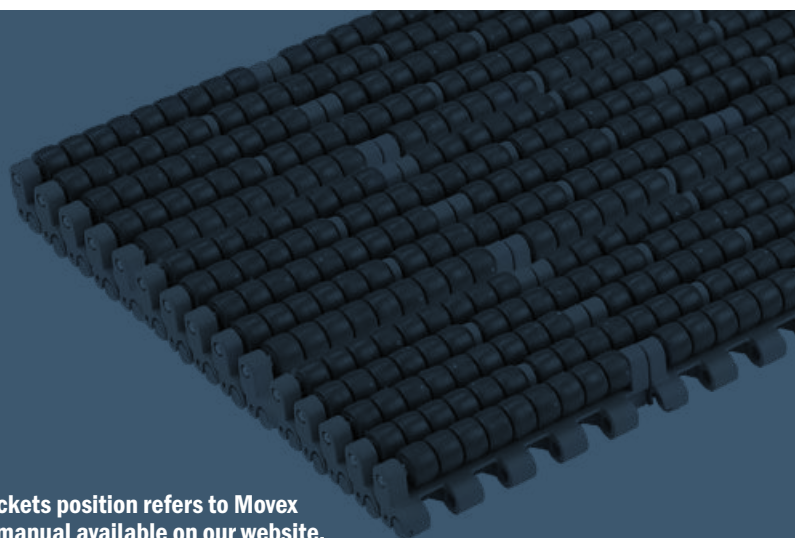

Modular belts


510



510 FT

Pag 182

522



522 HD FT

Pag 194

522 HD One track Belt

Pag 195

530



530 FT

Pag 208

530 FTT

Pag 209

530 GT

Pag 210

530 GT Side indent

Pag 211


530 LBP

Pag 212

530 PRO LBP

Pag 213

551



551 FT

Pag 227

551 FTT

Pag 228

551 GT

Pag 229

551 GT Side indent

Pag 230


551 LBP

Pag 231

551 PRO LBP

Pag 232


553



553 FLEX TOP

Pag 242/243

556




556 FT

Pag 245

556 GT

Pag 246

520



520 FT

Pag 184

520 HD FT

Pag 185

520 FTT

Pag 186

520 FG

Pag 187

520 GT

Pag 188

520 LBP

Pag 189


520 PRO LBP

Pag 190

520 M

Pag 191

590



590 FT

Pag 197


590 FT One track Belt

Pag 198

590 FTT

Pag 199

525



525 HD FT

Pag 201

525 HD FT + RIB

Pag 202

525 FTT

Pag 203

525 HD FG

Pag 204

525 HD GT

Pag 205

525 HD GT Side indent

Pag 206

550



550 FT

Pag 215

550 FT One track Belt

Pag 216

550 FTT

Pag 217

550 FG

Pag 218

550 FG One track Belt

Pag 219

550 GT

Pag 220

550 GT Side indent

Pag 221

550 FLIGHT TOP

Pag 222/223


550 PRO FT

Pag 224

550 PRO M

Pag 225

552



552 FT

Pag 234

552 FT One track Belt

Pag 235

552 FTT

Pag 236

552 PT

Pag 237

552 PT One track Belt

Pag 238


552 GT

Pag 239

552 GT Side indent

Pag 240

600



600 Standard

Pag 248

600 Heavy duty

Pag 249

600 Heavy duty with Bearings

Pag 250

600 Small radius

Pag 251

600 Heavy duty/ Small radius

Pag 252

600 Heavy duty/ Small radius with Bearings


Pag 253

600 with pusher

Pag 254


1047 Heavy duty guide

Pag 254



500 RR
Pag 256


500 RR with Positioner
Pag 257



389 Combs
Pag 258



ZERO CONTACT
Pag 260/261



ZERO CONTACT PRO
Pag 262/263



260 M FT
Pag 265


260 M FG
Pag 266

260 TAB
Pag 267




261 M FT
Pag 268

261 TAB
Pag 269

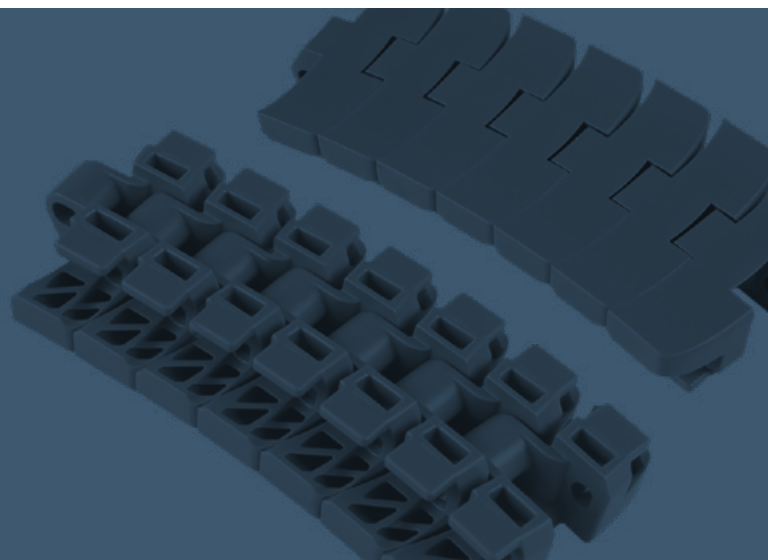

NoseBars Standard

for Modular belt:



510 Series
Pag 273

520 Series
Pag 273

525 Series
Pag 273

521 Series
Pag 274

522 HD Series
Pag 274

530 Series
(LBP excluded) Pag 275

530 LBP
Pag 275

530 PRO LBP
Pag 276

NoseBars with Bearings

for Modular belt:



520 Series
Pag 277

525 Series
Pag 277

521 Series
Pag 277

522 HD Series
Pag 278


530 Series
(LBP excluded) Pag 278

530 LBP
Pag 279

530 PRO LBP
Pag 279

NoseBars with Rollers

for Modular belt:



520 Series
Pag 280

525 Series
Pag 280

521 Series
Pag 280

522 HD Series
Pag 281

530 Series
(LBP excluded) Pag 281

One piece

Custom made NoseBar, supplied in a single piece.

One piece is the system patented by Movex that greatly reduces the time necessary for the conveyor maintenance: being a single piece, of the required size, it is quick to install and easy to clean.

Standard

for Modular belt:



520 Series
Pag 282

525 Series
Pag 282

522 HD Series
Pag 282

530 Series
Pag 282

with Bearings

for Modular belt:



520 Series
Pag 283

525 Series
Pag 283

522 HD Series
Pag 283

530 Series
Pag 283

with Rollers

for Modular belt:



520 Series
Pag 284

525 Series
Pag 284

522 HD Series
Pag 284

530 Series
Pag 284

510 Series

510

Pitch 8 mm
H= 6 mm

Imperial Size



510 FT

Movex®

510 FT

Tappeto Modulare 510 FT, H=6 M=3"

Modular Belt Series 510 FT, H=6 M=3" / Modulare Mattenkette 510 FT, H=6 M=3"

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 7.5 mm

5331	01	0012	A
Series	*Material	Width	Version

pg. 312	pg. 273	pg. 296/298	pg. 651>661

SAMPLE BOX

Art.-Nr. 5331018888A

Pin Sphere®
AUTO LOCK

- Easier installation
- Quicker maintenance

8 mm
PITCH

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 3000 N/m
 Weight: 5,8 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT grey

MX - Code 03

Performance PBT


Max w. load: 2700 N/m
 Weight: 5,5 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

LFB - Code 23

Low friction Acetal


Max w. load: 3000 N/m
 Weight: 5,8 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT grey

Version A - Standard

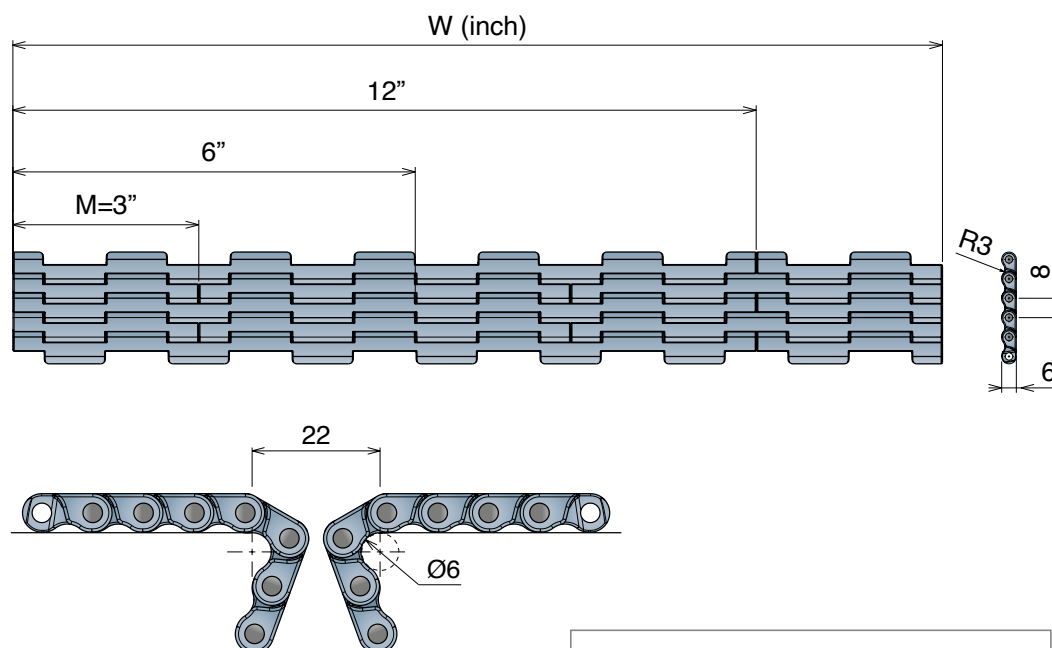

Version A - Standard

Series	Material	Width	Version
5331	*	0003	A
5331	*	0006	A
5331	*	0009	A
5331	*	0012	A
5331	*	0015	A
5331	*	0018	A
5331	*	0021	A
5331	*	0024	A
5331	*	0027	A
5331	*	0030	A
5331	*	0033	A
5331	*	0036	A
5331	*	0039	A
5331	*	0042	A
5331	*	0045	A
5331	*	0048	A

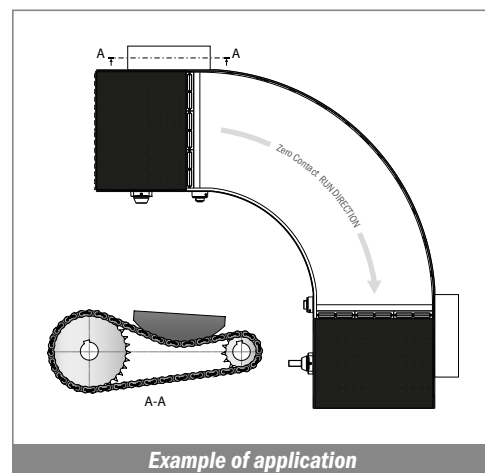

NEW

510 FT
MOVEX TOOL

Developed to facilitate belt assembly and disassembly.



Article Nr. 29969

Movex tools are made with 3D printer, the color may vary due to availability of the material.

Movex®



520

Pitch 12,7 mm
H= 8,7 mm



Metric Size

520 FT
520 HD FT
520 FTT
520 FG
520 GT
520 LBP

520 PRO LBP
520 M

520 FT



Tappeto Modulare 520 FT, H=8,7 M=85

Modular Belt Series 520 FT, H=8,7 M=85 / Modulare Mattenkette 520 FT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 10 mm

5201	01	0085	A
Series	*Material	Width	Version




SAMPLE BOX

Art.-Nr. 5201018888A



REINFORCED POSITIONER

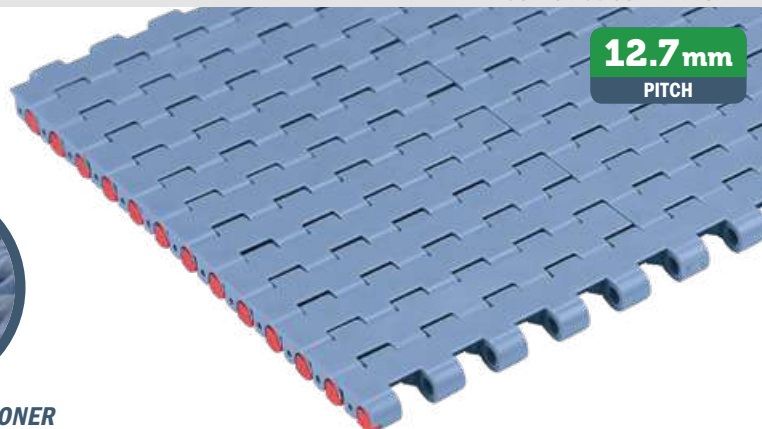

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 21500 N/m
Weight: 7,8 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

PP - Code 02

Polypropylene

Max w. load: 13000 N/m
Weight: 7,5 kg/m²
Temp. range dry: 4÷104 °C
Temp. range wet: 4÷104 °C
Pin material: PP blue

MX - Code 03

Performance PBT

Max w. load: 17500 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

LFB - Code 23

Low friction Acetal

Max w. load: 21500 N/m
Weight: 7,8 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

MPX - Code 25

Lubricated Acetal

Max w. load: 21500 N/m
Weight: 7,8 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white


PFX - Code 30

Extra performance PBT


Max w. load: 17500 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS


Version A - Standard

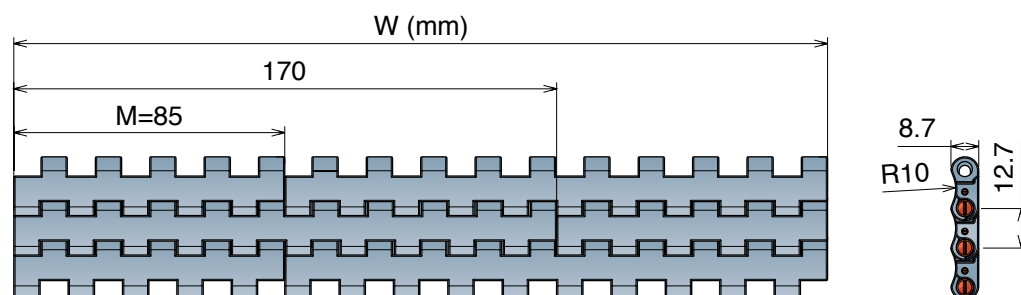

Version B - With 1 Positioner

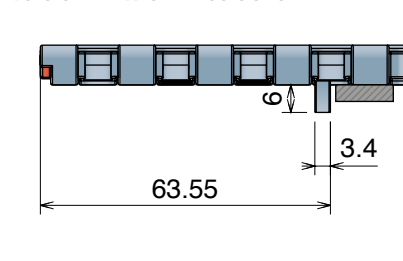

Version C - With 2 Positioners

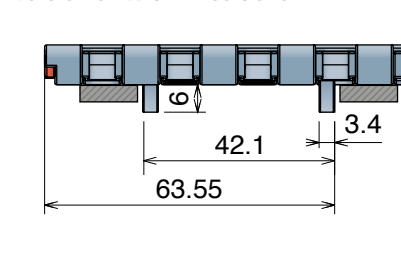

Version A - Standard

Series	Material	Width	Version
5201	*	0085	A
5201	*	0170	A
5201	*	0255	A
5201	*	0340	A
5201	*	0425	A
5201	*	0510	A
5201	*	0595	A
5201	*	0680	A
5201	*	0765	A
5201	*	0850	A
5201	*	0935	A
5201	*	1020	A
5201	*	1105	A
5201	*	1190	A
5201	*	1275	A
5201	*	1360	A
5201	*	1445	A
5201	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5201	*	0085	B
5201	*	0170	B
5201	*	0255	B
5201	*	0340	B
5201	*	0425	B
5201	*	0510	B
5201	*	0595	B
5201	*	0680	B
5201	*	0765	B
5201	*	0850	B
5201	*	0935	B
5201	*	1020	B
5201	*	1105	B
5201	*	1190	B
5201	*	1275	B
5201	*	1360	B
5201	*	1445	B
5201	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5201	*	0085	C
5201	*	0170	C
5201	*	0255	C
5201	*	0340	C
5201	*	0425	C
5201	*	0510	C
5201	*	0595	C
5201	*	0680	C
5201	*	0765	C
5201	*	0850	C
5201	*	0935	C
5201	*	1020	C
5201	*	1105	C
5201	*	1190	C
5201	*	1275	C
5201	*	1360	C
5201	*	1445	C
5201	*	1530	C

520 HD FT

Tappeto Modulare 520 HD, H=8,7 M=85
Modular Belt Series 520 HD, H=8,7 M=85 / Modulare Mattenkette 520 HD, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 10 mm

5211	01	0085	A
Series	*Material	Width	Version

		
pg. 313-314	273/277/280	pg. 651>661

SAMPLE BOX

Art.-Nr. **5211018888A**



12.7mm
PITCH

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 25500 N/m
Weight: 7,8 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 20000 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

MPX - Code 25

Lubricated Acetal

Max w. load: 25000 N/m
Weight: 7,8 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white


PFX - Code 30

Extra performance PBT


Max w. load: 20000 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

**THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS**


Version A - Standard

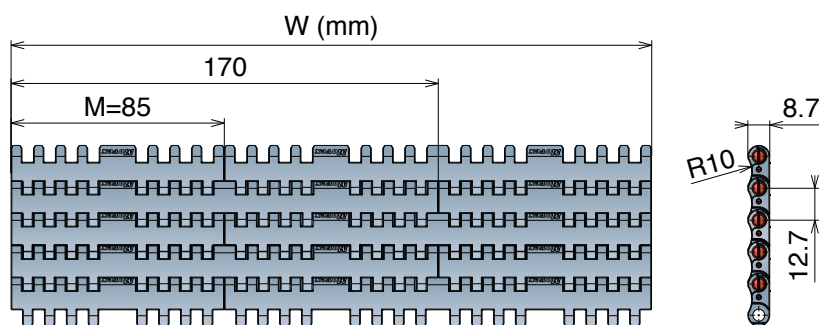

Version B - With 1 Positioner

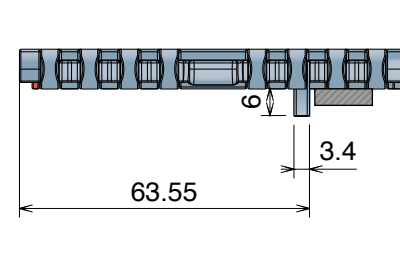

Version C - With 2 Positioner

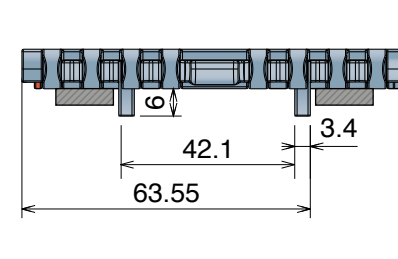

Version A - Standard

Series	Material	Width	Version
5211	*	0085	A
5211	*	0170	A
5211	*	0255	A
5211	*	0340	A
5211	*	0425	A
5211	*	0510	A
5211	*	0595	A
5211	*	0680	A

Version B - With 1 Positioner

Series	Material	Width	Version
5211	*	0085	B
5211	*	0170	B
5211	*	0255	B
5211	*	0340	B
5211	*	0425	B
5211	*	0510	B
5211	*	0595	B
5211	*	0680	B

Version C - With 2 Positioners

Series	Material	Width	Version
5211	*	0085	C
5211	*	0170	C
5211	*	0255	C
5211	*	0340	C
5211	*	0425	C
5211	*	0510	C
5211	*	0595	C
5211	*	0680	C



Advantages:

- Improved working load
- Easy installation
- Rigidity
- Product stability

520 FTT

Tappeto Modulare 520 FTT, H=8,7 M=85

Modular Belt Series 520 FTT, H=8,7 M=85 / Modulare Mattenkette 520 FTT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 10 mm

5206	01	0085	C
Series	*Material	Width	Version


		
pg. 315-316	273/277/280	pg. 651>661

*Material


LFA - Code 01	MX - Code 03
Low friction Acetal	Performance PBT
Max w. load: 21500 N/m	Max w. load: 17500 N/m
Weight: 7,8 kg/m ²	Weight: 7,5 kg/m ²
Temp. range dry: -40÷80 °C	Temp. range dry: -40÷120 °C
Temp. range wet: -40÷65 °C	Temp. range wet: 40÷60 °C
Pin material: PBT white	Pin material: POM grey

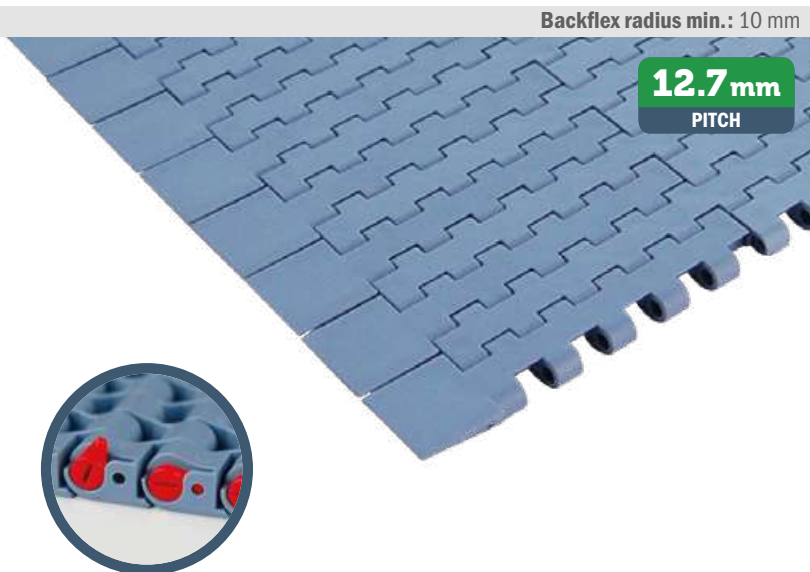

12.7mm
PITCH

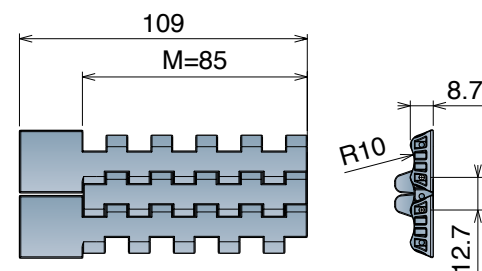

Version C




Version C


Series	Material	Width	Version
5206	*	0085	C

Max working load (N)

Width	85
LFA	1850
MX	1500

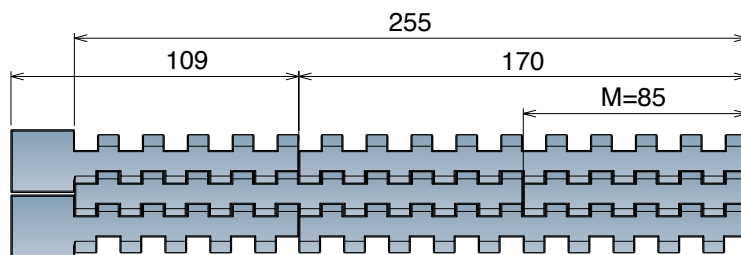

Version CN - Near

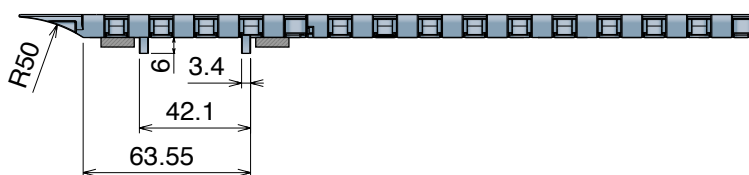

Version C0 - Opposite



Version CN - Near

Series	Material	Width	Version
5206	*	0170	CN
5206	*	0255	CN

Version C0 - Opposite

Series	Material	Width	Version
5206	*	0170	C0
5206	*	0255	C0

520 FG

Open Surface 25%

Tappeto Modulare 520 FG, H=8,7 M=85
Modular Belt Series 520 FG, H=8,7 M=85 / Modulare Mattenkette 520 FG, H=8,7 M=85

Metric Size

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 10 mm

5202	01	0085	A
Series	*Material	Width	Version

		
pg. 315-316	273/277/280	pg. 651>661

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 21500 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PP - Code 02

Polypropylene

Max w. load: 13000 N/m
Weight: 7,5 kg/m²
Temp. range dry: 4÷104 °C
Temp. range wet: 4÷104 °C
Pin material: PP blue

MX - Code 03

Performance PBT

Max w. load: 17500 N/m
Weight: 7,2 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

DKM - Code 16

Aramid Reinforced Acetal

Max w. load: 21500 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MWX - Code 17

Polyamide Composite

Max w. load: 21500 N/m
Weight: 7,8 kg/m²
Temp. range dry: -40÷104 °C
Temp. range wet: NR
Pin material: PBT white

LFB - Code 23



Low friction Acetal

Max w. load: 21500 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white


MPX - Code 25

Lubricated Acetal


Max w. load: 21500 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

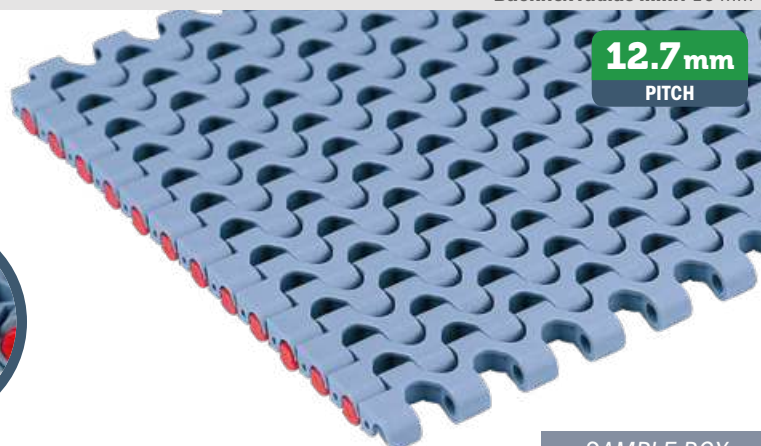
12.7mm
PITCH



Version A - Standard

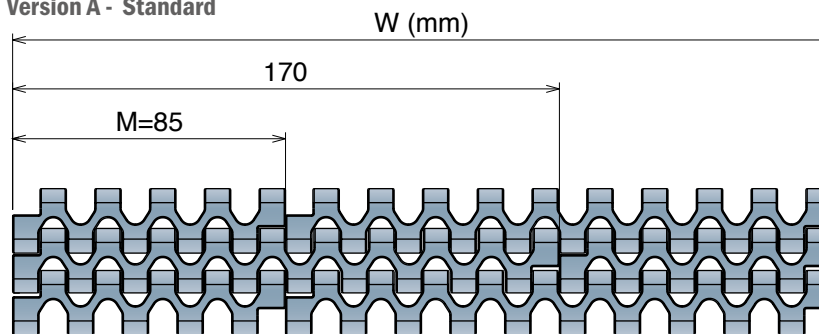

Version B - With 1 Positioner

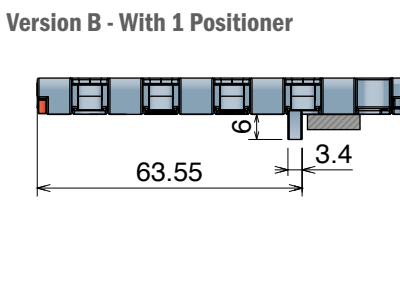

Version C - With 2 Positioners

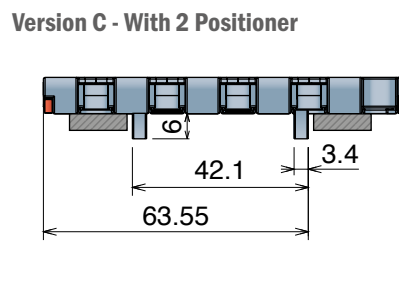

Version A - Standard

Series	Material	Width	Version
5202	*	0085	A
5202	*	0170	A
5202	*	0255	A
5202	*	0340	A
5202	*	0425	A
5202	*	0510	A
5202	*	0595	A
5202	*	0680	A
5202	*	0765	A
5202	*	0850	A
5202	*	0935	A
5202	*	1020	A
5202	*	1105	A
5202	*	1190	A
5202	*	1275	A
5202	*	1360	A
5202	*	1445	A
5202	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5202	*	0085	B
5202	*	0170	B
5202	*	0255	B
5202	*	0340	B
5202	*	0425	B
5202	*	0510	B
5202	*	0595	B
5202	*	0680	B
5202	*	0765	B
5202	*	0850	B
5202	*	0935	B
5202	*	1020	B
5202	*	1105	B
5202	*	1190	B
5202	*	1275	B
5202	*	1360	B
5202	*	1445	B
5202	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5202	*	0085	C
5202	*	0170	C
5202	*	0255	C
5202	*	0340	C
5202	*	0425	C
5202	*	0510	C
5202	*	0595	C
5202	*	0680	C
5202	*	0765	C
5202	*	0850	C
5202	*	0935	C
5202	*	1020	C
5202	*	1105	C
5202	*	1190	C
5202	*	1275	C
5202	*	1360	C
5202	*	1445	C
5202	*	1530	C

520 GT

Tappeto Modulare 520 GT, H=8,7 M=85

Modular Belt Series 520 GT, H=8,7 M=85 / Modulare Mattenkette 520 GT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 20 mm

5203	01	0085	A
Series	*Material	Width	Version



pg. 315-316





273/277/280



pg. 651>661

SAMPLE BOX

Art.-Nr. 5203018888A

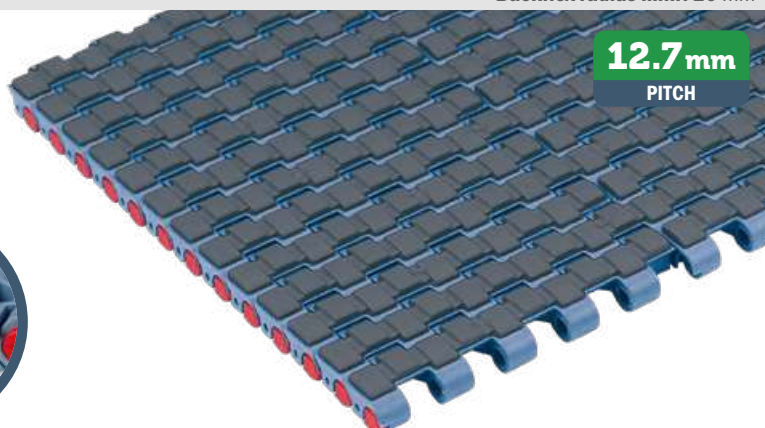12.7mm
PITCH

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 21500 N/m
 Weight: 9,0 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white
 Top rubber: 50 ShA-Dark grey

PP - Code 02

Polypropylene


Max w. load: 13000 N/m
 Weight: 7,5 kg/m²
 Temp. range dry: 4÷80 °C
 Temp. range wet: 4÷80 °C
 Pin material: PP blu
 Top rubber: 50 ShA-Pigeon blue

MX - Code 03


Performance PBT

Max w. load: 17500 N/m
 Weight: 9,3 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey
 Top rubber: 50 ShA-Dark grey


Version A - Standard

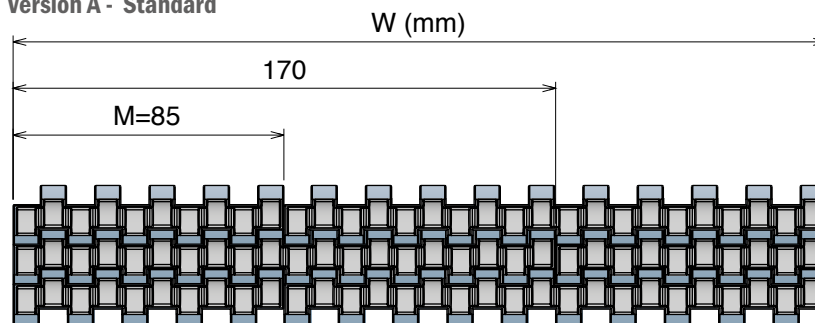

Version B - With 1 Positioner



Version C - With 2 Positioner

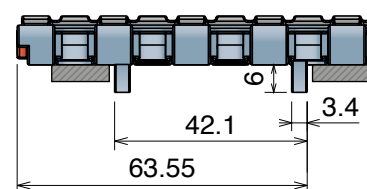

Version A - Standard

Series	Material	Width	Version
5203	*	0085	A
5203	*	0170	A
5203	*	0255	A
5203	*	0340	A
5203	*	0425	A
5203	*	0510	A
5203	*	0595	A
5203	*	0680	A
5203	*	0765	A
5203	*	0850	A
5203	*	0935	A
5203	*	1020	A
5203	*	1105	A
5203	*	1190	A
5203	*	1275	A
5203	*	1360	A
5203	*	1445	A
5203	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5203	*	0085	B
5203	*	0170	B
5203	*	0255	B
5203	*	0340	B
5203	*	0425	B
5203	*	0510	B
5203	*	0595	B
5203	*	0680	B
5203	*	0765	B
5203	*	0850	B
5203	*	0935	B
5203	*	1020	B
5203	*	1105	B
5203	*	1190	B
5203	*	1275	B
5203	*	1360	B
5203	*	1445	B
5203	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5203	*	0085	C
5203	*	0170	C
5203	*	0255	C
5203	*	0340	C
5203	*	0425	C
5203	*	0510	C
5203	*	0595	C
5203	*	0680	C
5203	*	0765	C
5203	*	0850	C
5203	*	0935	C
5203	*	1020	C
5203	*	1105	C
5203	*	1190	C
5203	*	1275	C
5203	*	1360	C
5203	*	1445	C
5203	*	1530	C

520 LBP

Tappeto Modulare 520 LBP, H=8,7 M=85

Modular Belt Series 520 LBP, H=8,7 M=85 / Modulare Mattenkette 520 LBP, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)



Backflex radius min.: 65 mm

5204	01	0085	A
Series	*Material	Width	Version

		
pg. 315-316	273/277/280	pg. 651>661


SAMPLE BOX

Art.-Nr. 5204010888A

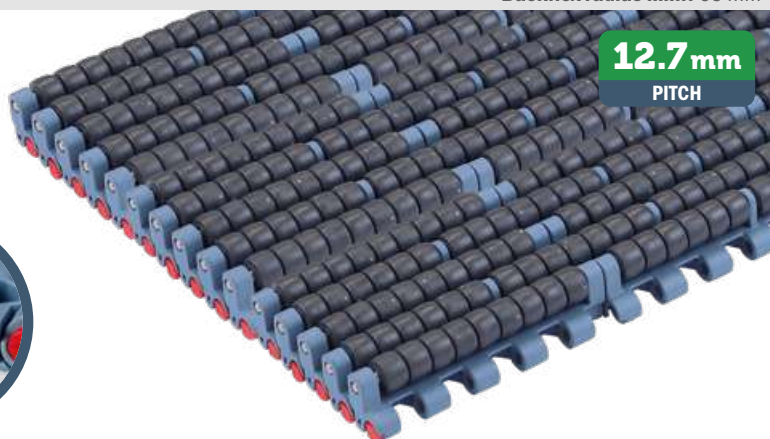12.7mm
PITCH

Metric Size

Version A - Standard

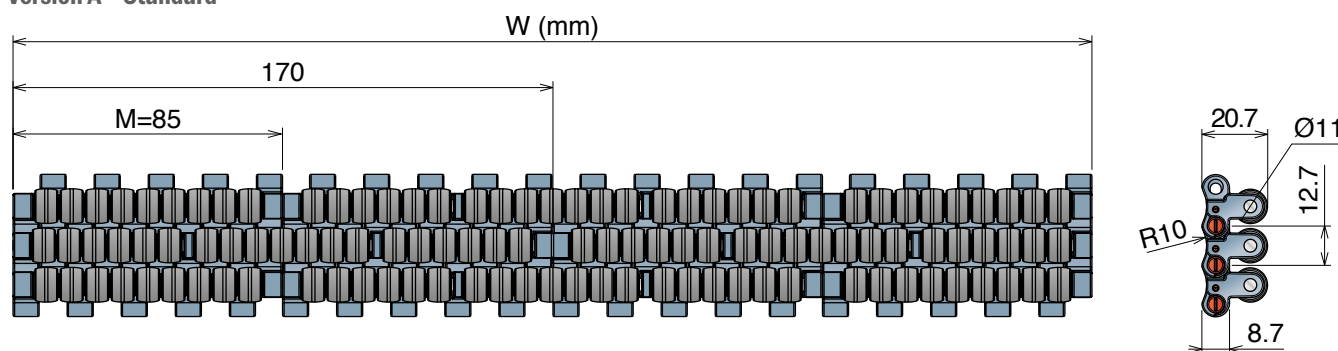


*Material

LFA - Code 01


Low friction Acetal

Max w. load: 21500 N/m
 Weight: 24,0 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: 1÷65 °C
 Pin material: PBT white

Version B - With 1 Positioner

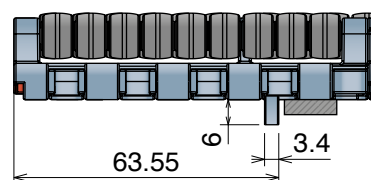

Version C - With 2 Positioner

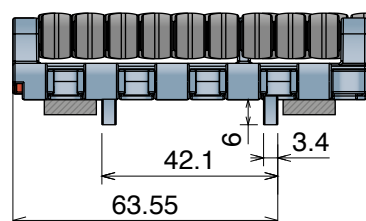

Version A - Standard

Series	Material	Width	Version
5204	01	0085	A
5204	01	0170	A
5204	01	0255	A
5204	01	0340	A
5204	01	0425	A
5204	01	0510	A
5204	01	0595	A
5204	01	0680	A
5204	01	0765	A
5204	01	0850	A
5204	01	0935	A
5204	01	1020	A
5204	01	1105	A
5204	01	1190	A
5204	01	1275	A
5204	01	1360	A
5204	01	1445	A
5204	01	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5204	01	0085	B
5204	01	0170	B
5204	01	0255	B
5204	01	0340	B
5204	01	0425	B
5204	01	0510	B
5204	01	0595	B
5204	01	0680	B
5204	01	0765	B
5204	01	0850	B
5204	01	0935	B
5204	01	1020	B
5204	01	1105	B
5204	01	1190	B
5204	01	1275	B
5204	01	1360	B
5204	01	1445	B
5204	01	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5204	01	0085	C
5204	01	0170	C
5204	01	0255	C
5204	01	0340	C
5204	01	0425	C
5204	01	0510	C
5204	01	0595	C
5204	01	0680	C
5204	01	0765	C
5204	01	0850	C
5204	01	0935	C
5204	01	1020	C
5204	01	1105	C
5204	01	1190	C
5204	01	1275	C
5204	01	1360	C
5204	01	1445	C
5204	01	1530	C

520 PRO LBP

Tappeti modulari / Modular belts / Mattenketten

PATENTED

Belts wider than standard are available with 85 mm increments

520 PRO LBP

Tappeto Modulare 520 PRO LBP, H=8,7 M=85

Modular Belt Series 520 PRO LBP, H=8,7 M=85 / Modulare Mattenkette 520 PRO LBP, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 40 mm

5209	01	0085	A
Series	*Material	Width	Version

		
pg. 315-316	273/277/280	pg. 651-661

SAMPLE BOX

Art.-Nr. **5210018888A**

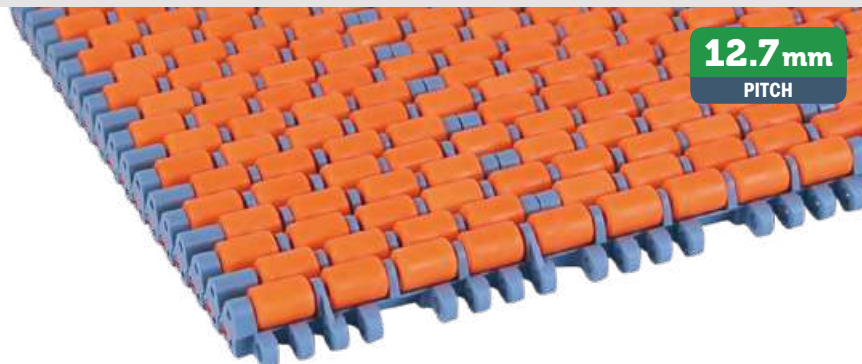

12.7mm
PITCH

Material

LFA - Code 01

Low friction Acetal

Max w. load: 25000 N/m
Weight SS pin: 19,0 kg/m²
Weight Plastic pin: 15,3 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white


PFX Roller

**THE BEST CHOICE TO REACH
THE LOWEST FRICTION**




Bottom view


Version A - Standard

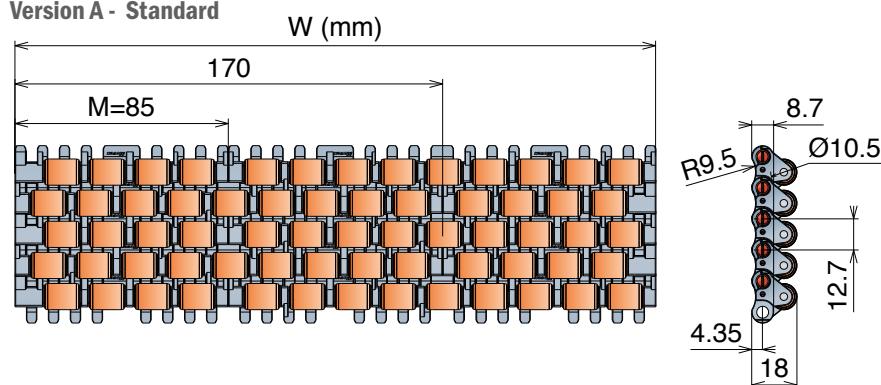

Version B - With 1 Positioner

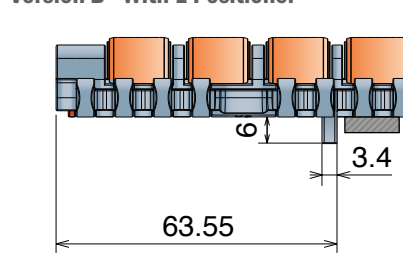

Version C - With 2 Positioner

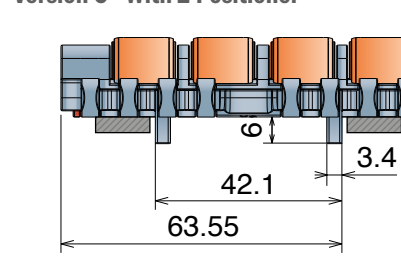

Stainless steel Pin



Plastic Pin

Series	Material	Width	Version
5209	01	0085	*
5209	01	0170	*
5209	01	0255	*
5209	01	0340	*
5209	01	0425	*
5209	01	0510	*
5209	01	0595	*
5209	01	0680	*
5209	01	0765	*
5209	01	0850	*
5209	01	0935	*
5209	01	1020	*
5209	01	1105	*
5209	01	1190	*
5209	01	1275	*
5209	01	1360	*
5209	01	1445	*
5209	01	1530	*

Series	Material	Width	Version
5210	01	0085	*
5210	01	0170	*
5210	01	0255	*
5210	01	0340	*
5210	01	0425	*
5210	01	0510	*
5210	01	0595	*
5210	01	0680	*
5210	01	0765	*
5210	01	0850	*
5210	01	0935	*
5210	01	1020	*
5210	01	1105	*
5210	01	1190	*
5210	01	1275	*
5210	01	1360	*
5210	01	1445	*
5210	01	1530	*

*Version

Standard	Add A
With 1 Positioner	Add B
With 2 Positioners	Add C

520 M

Tappeto Modulare 520 M, H=8,7 K 330

Modular Belt Series 520 M, H=8,7 K 330 / Modulare Mattenkette 520 M, H=8,7 K 330

Part	Article-Nr.	Ref.	Weight	* Material
1193	1195019330	LFA 520 M K330	1,11	LFA
1193	1195039330	MX 520 M K330	1,11	MX
1193	1195309330	PFX 520 M K330	1,11	PFX

Backflex radius min.: 15 mm

12.7mm
PITCH

10 feet 3.048 m		NoseBars		
240 links	pg. 315-316	273/277/280	pg. 155->161	pg. 651->661

SAMPLE BOX

Art.-Nr. 1195018888A

MAGNETIC SYSTEM



- Easier installation • Quicker maintenance
- Interchangeable with previous design

* Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 2500 N
 Weight: 7,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin: Ferritic stainless steel

MX - Code 03

Performance PBT

Max w. load: 2000 N
 Weight: 7,2 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin: Ferritic stainless steel


PFX - Code 30

Extra performance PBT

Max w. load: 2000 N
 Weight: 7,2 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin: Ferritic stainless steel

**THE BEST CHOICE FOR
 DRY RUNNING APPLICATIONS**


Version A - Standard

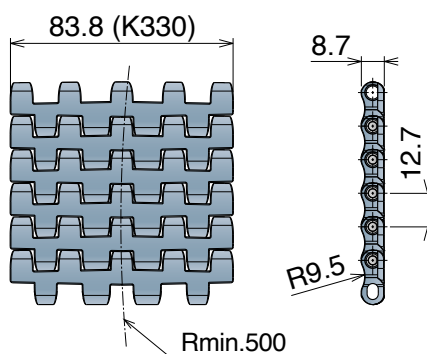


Advantages:

- No conveyor side transfers required
- Space savings
- Less components required
- Less drives required

Coventional layout

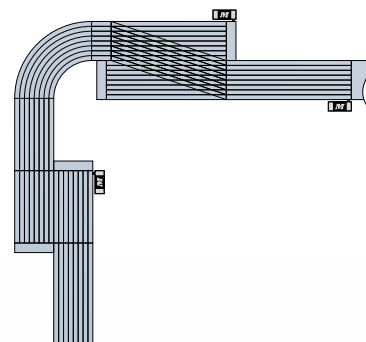

Layout with 520 M K330



NEW

520 M
MOVEX TOOL

The specific tool for 520 M developed
 to facilitate belt assembly and disassembly.



Article Nr. 29968

Movex tools are made with 3D printer, the color may vary due to availability of the material.

Movex

Metric Size

Tappeti modulari / Modular belts / Mattenketten

521/522

Pitch 12,7 mm
H= 8,7 mm



Imperial Size

Metric Size

521 FT

522 HD FT

522 HD FT *One track belt*

521 FT

Tappeto Modulare 521 FT, H=8,7 M=7,5"

Modular Belt Series 521 FT, H=8,7 M=7,5" / Modulare Mattenkette 521 FT, H=8,7 M=7,5"


CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 10 mm

5311	01	9750	A
Series	*Material	Width	Version

12.7mm
PITCH

		
pg. 315-316	274/277/280	pg. 651>661



Imperial Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 4000 N
 Weight: 8,0 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 3300 N
 Weight: 7,8 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

DKM - Code 16

Aramid Reinforced Acetal

Max w. load: 4000 N
 Weight: 8,0 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MWX - Code 17

Polyamide Composite


Max w. load: 4000 N
 Weight: 8,3 kg/m²
 Temp. range dry: -40÷104 °C
 Temp. range wet: NR
 Pin material: PBT white

MPX - Code 25


Lubricated Acetal

Max w. load: 4000 N
 Weight: 8,0 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

Version A - Standard

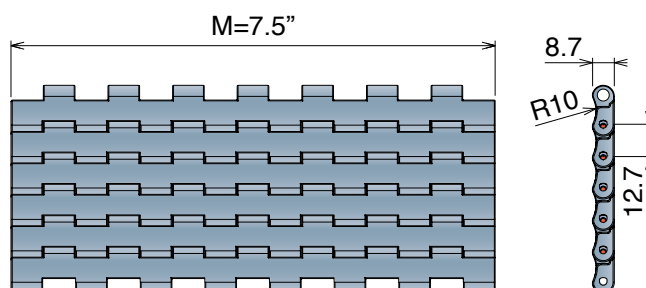

Version C - With 2 Positioner

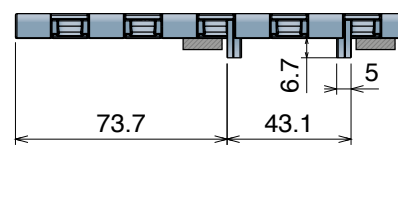

Version A - Standard

Series	Material	Width	Version
5311	*	9750	A

Version C - With 2 Positioners

Series	Material	Width	Version
5311	*	9750	C

NEW 522 HD FT

Tappeto Modulare 522 HD, H=8,7 M=50


Modular Belt Series 522 HD, H=8,7 M=50 / Modulare Mattenkette 522 HD, H=8,7 M=50

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 10 mm

5271	01	0100	A
Series	*Material	Width	Version

		
pg. 313-314	274/278/281	pg. 651-661



12.7mm
PITCH

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 25500 N/m
Weight: 7,8 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 20000 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey


PFX - Code 30

Extra performance PBT


Max w. load: 20000 N/m
Weight: 7,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

**THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS**

Version A - Standard

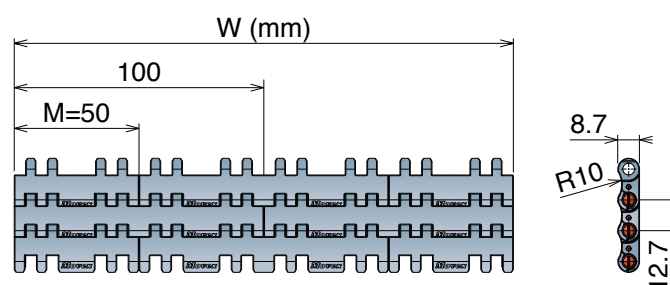

Version C - With 2 Positioner

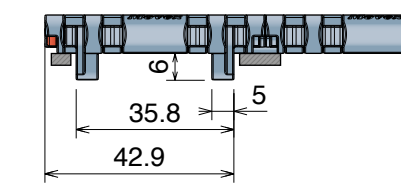

Version A - Standard

Series	Material	Width	Version
5271	*	0100**	A
5271	*	0150	A
5271	*	0200	A
5271	*	0250	A
5271	*	0300	A

Version C - With 2 Positioners

Series	Material	Width	Version
5271	*	0100**	C
5271	*	0150	C
5271	*	0200	C
5271	*	0250	C
5271	*	0300	C

** Belt assembled with Pin Sphere.

NEW

522 HD One track belt MOVEX TOOL

The specific tool for belts developed to facilitate belt assembly and disassembly, perfectly compatible also with all 522 HD One-Track belt versions (See next page).



Article Nr. **29971**

Movex tools are made with 3D printer, the color may vary due to availability of the material.

Movex

NEW



522 HD FT *One track Belt*

Tappeto Modulare 522 HD, H=8,7
Modular Belt Series 522 HD, H=8,7 / Modulare Mattenkette 522 HD, H=8,7

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 10 mm

5271	01	9115	A
Series	*Material	Width	Version



*Material

Easy Delivery

LFA - Code 01
Low friction Acetal

MX - Code 03
Performance PBT

PFX - Code 30
Extra performance PBT

Max w. load: See table below
Weight: 7,8 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

Max w. load: See table below
Weight: 7,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM black

Max w. load: See table below
Weight: 7,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM black






Pin Sphere®
AUTOLOCK

- Easier installation
- Quicker maintenance
- High strength

Width 29 mm

Version C - With 2 Positioner

Version A - Standard






Series	Material	Width	Version
5271	*	9115	A
5271	*	9115	C

Width 34 mm

Version C - With 2 Positioner

Version A - Standard






Series	Material	Width	Version
5271	*	9134	A
5271	*	9134	C

Width 37 mm

Version C - With 2 Positioner

Version A - Standard






Series	Material	Width	Version
5271	*	9145	A
5271	*	9145	C

Width 51 mm

Version C - With 2 Positioner

Version A - Standard






Series	Material	Width	Version
5271	*	9200	A
5271	*	9200	C

Width 76 mm

Version C - With 2 Positioner

Version A - Standard

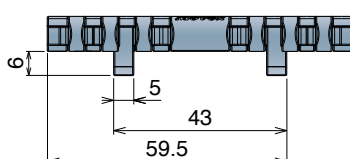

Series	Material	Width	Version
5271	*	9300	A
5271	*	9300	C

Max working load (N)

Width	29	34	37	51	76
LFA	600	870	945	1300	2000
MX	450	680	740	1020	1520
PFX	450	680	740	1020	1520

590

Pitch 19,05 mm
H= 8,7 mm



590 FT
590 FT *One track Belt*
590 FTT

590 FT

Tappeto Modulare 590 FT, H=8,7 M=3"

Modular Belt Series 590 FT, H=8,7 M=3" / Modulare Mattenkette 590 FT, H=8,7 M=3"

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 25 mm

5301	01	0003	A
Series	*Material	Width	Version

pg. 318	pg. 651 > 661

SAMPLE BOX

Art.-Nr. 5301018888A

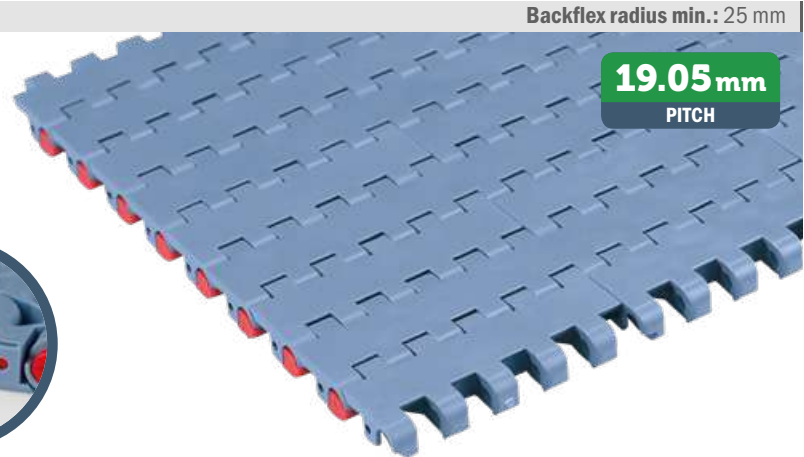

Imperial Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 30000 N/m
 Weight: 7,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MX - Code 03

Performance PBT


Max w. load: 24000 N/m
 Weight: 7,0 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

MPX - Code 25


Lubricated Acetal

Max w. load: 30000 N/m
 Weight: 7,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

Version A - Standard

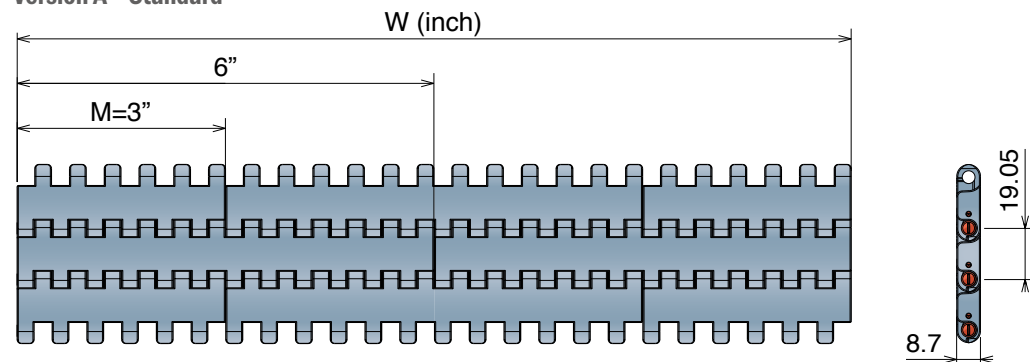

Version C - With 2 Positioner

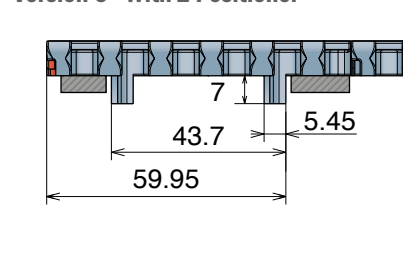

Version A - Standard

Series	Material	Width	Version
5301	*	0003	A
5301	*	0006	A
5301	*	0009	A
5301	*	0012	A
5301	*	0015	A
5301	*	0018	A
5301	*	0021	A
5301	*	0024	A
5301	*	0027	A
5301	*	0030	A
5301	*	0033	A
5301	*	0036	A
5301	*	0039	A
5301	*	0042	A
5301	*	0045	A
5301	*	0048	A
5301	*	0051	A
5301	*	0054	A

Version C - With 2 Positioners

Series	Material	Width	Version
5301	*	0003	C
5301	*	0006	C
5301	*	0009	C
5301	*	0012	C
5301	*	0015	C
5301	*	0018	C
5301	*	0021	C
5301	*	0024	C
5301	*	0027	C
5301	*	0030	C
5301	*	0033	C
5301	*	0036	C
5301	*	0039	C
5301	*	0042	C
5301	*	0045	C
5301	*	0048	C
5301	*	0051	C
5301	*	0054	C

590 FT One track Belt

Tappeti modulari / Modular belts / Mattenketten

Imperial Size

590 FT One track Belt

Tappeto Modulare 590 FT, H=8,7



Modular Belt Series 590 FT, H=8,7 / Modulare Mattenkette 590 FT, H=8,7

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5301	01	9325	A
Series	*Material	Width	Version

pg. 318	pg. 651>661

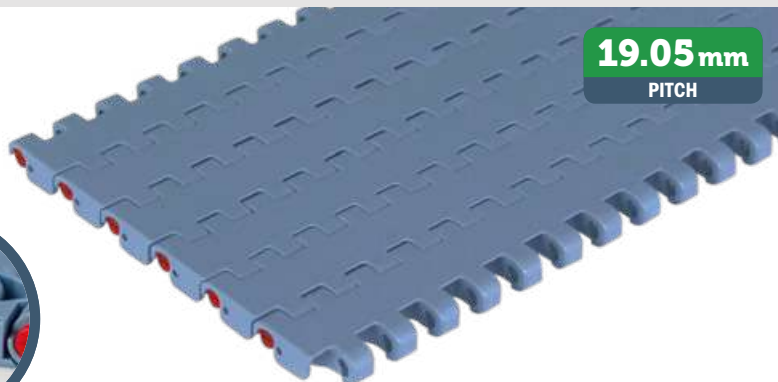

19.05 mm
PITCH

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Weight: 7,2 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Weight: 7,0 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

MPX - Code 25


Lubricated Acetal

Weight: 7,2 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white


Max working load (N)

Width	K325	K450	K750
LFA	2500	3400	5700
MX	2000	2800	4500
MPX	2500	3400	5700

Version A - Standard



Version C - With 2 Positioner

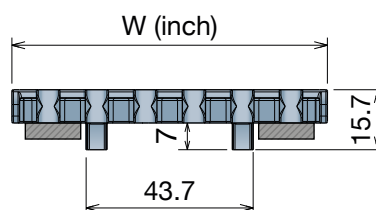


K325 - One track belt

Series	Material	Width	Version
5301	*	9325	A
5301	*	9325	C



K450 - One track belt

Series	Material	Width	Version
5301	*	9450	A
5301	*	9450	C

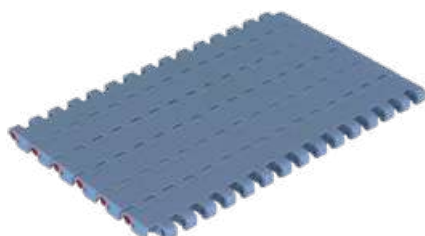

K750 - One track belt

Series	Material	Width	Version
5301	*	9750	A
5301	*	9750	C

590 FTT



Tappeto Modulare 590 FTT, H=8,7

Modular Belt Series 590 FTT, H=8,7 / Modulare Mattenkette 590 FTT, H=8,7

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5306	01	9450	C-R
Series	*Material	Width	Version

19.05mm
PITCH


*Material

LFA - Code 01

Low friction Acetal

Weight: 7,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MX - Code 03

Performance PBT

Weight: 7,0 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

MPX - Code 25


Lubricated Acetal

Weight: 7,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white



Max working load (N)

Width	K450	K750
LFA	3400	5700
MX	2800	4500
MPX	3400	5700


Version 590 FTT DX





W(inch)

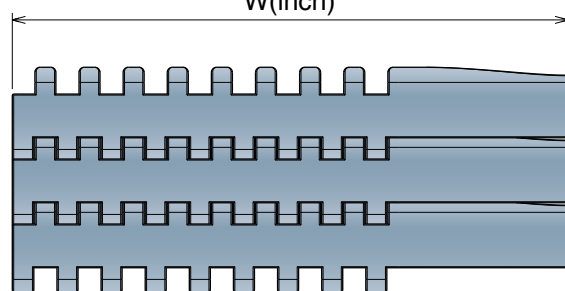

Version 590 FTT SX



W(inch)

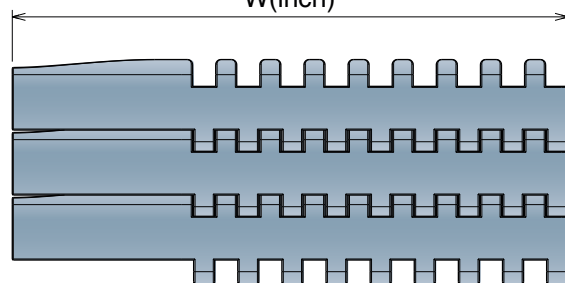

Version 590 FTT DX


Series	Material	Width	Version	Total width
5306	*	9450	C-R	160.0
5306	*	9750	C-R	236.2

Version 590 FTT SX

Series	Material	Width	Version	Total width
5306	*	9450	C-L	160.0
5306	*	9750	C-L	236.2

525

Pitch 15,0 mm
H= 8,7 mm

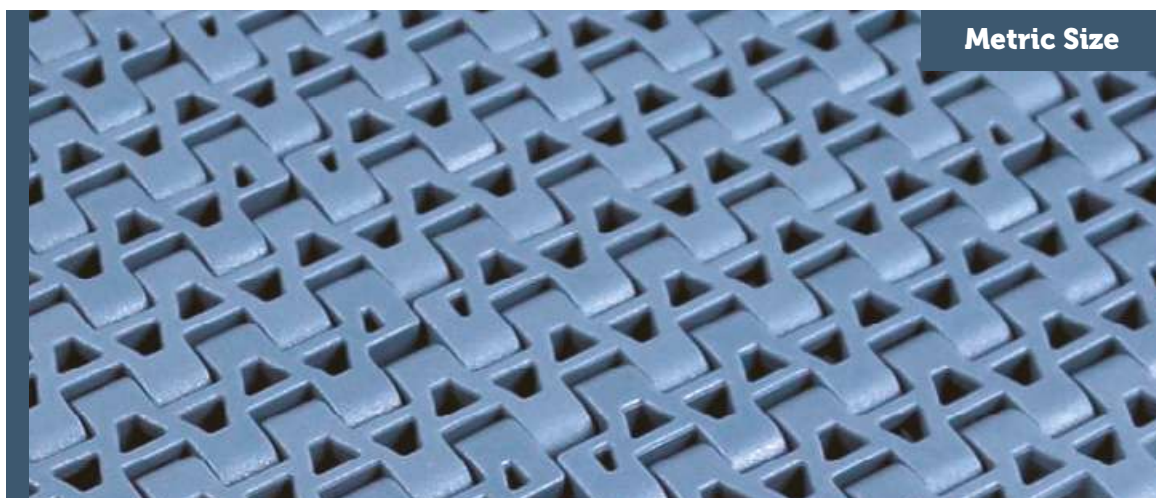

Metric Size

525 HD FT
525 HD FT+RIB
525 FTT
525 HD FG
525 HD GT
525 HD GT *Side Indent*

525 HD FT

Tappeto Modulare 525 HD, H=8,7 M=85

Modular Belt Series 525 HD, H=8,7 M=85 / Modulare Mattenkette 525 HD, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5261	01	0085	A
Series	*Material	Width	Version

		
pg. 317	273/277/280	pg. 651>661

SAMPLE BOX

Art.-Nr. 5261018888A



REINFORCED POSITIONER

15.0mm
PITCH

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 25500 N/m
 Weight: 9,0 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

PP - Code 02

Polypropylene

Max w. load: 15500 N/m
 Weight: 8,7 kg/m²
 Temp. range dry: 4÷104 °C
 Temp. range wet: 4÷104 °C
 Pin material: PP blue

MX - Code 03

Performance PBT

Max w. load: 20500 N/m
 Weight: 8,7 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

LFB - Code 23

Low friction Acetal

Max w. load: 25500 N/m
 Weight: 9,0 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white


PFX - Code 30

Extra performance PBT


Max w. load: 20500 N/m
 Weight: 8,7 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

THE BEST CHOICE FOR
 DRY RUNNING APPLICATIONS


Version A - Standard

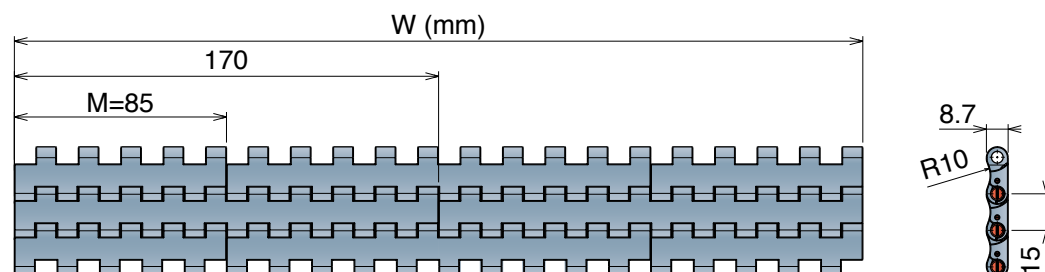

Version B - With 1 Positioner

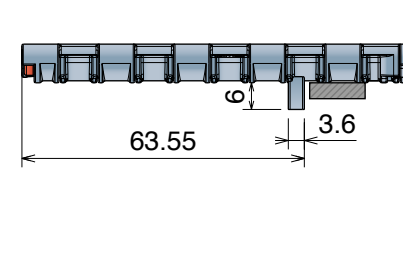

Version C - With 2 Positioner

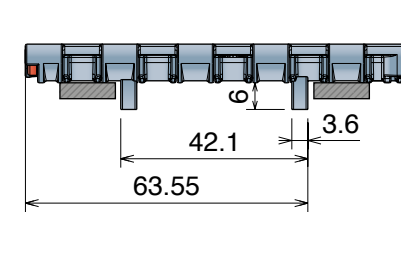

Version A - Standard

Series	Material	Width	Version
5261	*	0085	A
5261	*	0170	A
5261	*	0255	A
5261	*	0340	A
5261	*	0425	A
5261	*	0510	A
5261	*	0595	A
5261	*	0680	A
5261	*	0765	A
5261	*	0850	A
5261	*	0935	A
5261	*	1020	A
5261	*	1105	A
5261	*	1190	A
5261	*	1275	A
5261	*	1360	A
5261	*	1445	A
5261	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5261	*	0085	B
5261	*	0170	B
5261	*	0255	B
5261	*	0340	B
5261	*	0425	B
5261	*	0510	B
5261	*	0595	B
5261	*	0680	B
5261	*	0765	B
5261	*	0850	B
5261	*	0935	B
5261	*	1020	B
5261	*	1105	B
5261	*	1190	B
5261	*	1275	B
5261	*	1360	B
5261	*	1445	B
5261	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5261	*	0085	C
5261	*	0170	C
5261	*	0255	C
5261	*	0340	C
5261	*	0425	C
5261	*	0510	C
5261	*	0595	C
5261	*	0680	C
5261	*	0765	C
5261	*	0850	C
5261	*	0935	C
5261	*	1020	C
5261	*	1105	C
5261	*	1190	C
5261	*	1275	C
5261	*	1360	C
5261	*	1445	C
5261	*	1530	C

525 HD FT + RIB



Tappeto Modulare 525 HD, H=8,7 M=85

Modular Belt Series 525 HD, H=8,7 M=85 / Modulare Mattenkette 525 HD, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5261	01	0085	A	XR3
Series	*Material	Width	Version	RIB



*Material

LFA - Code 01


Low friction Acetal

Max w. load: 25500 N/m
Weight: 9,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03


Performance PBT

Max w. load: 20500 N/m
Weight: 8,7 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

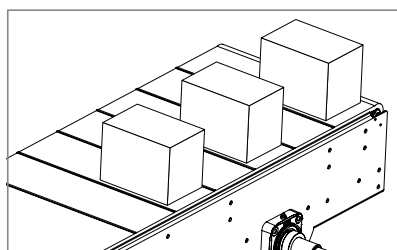


Special application in palletizer


Version A - Standard

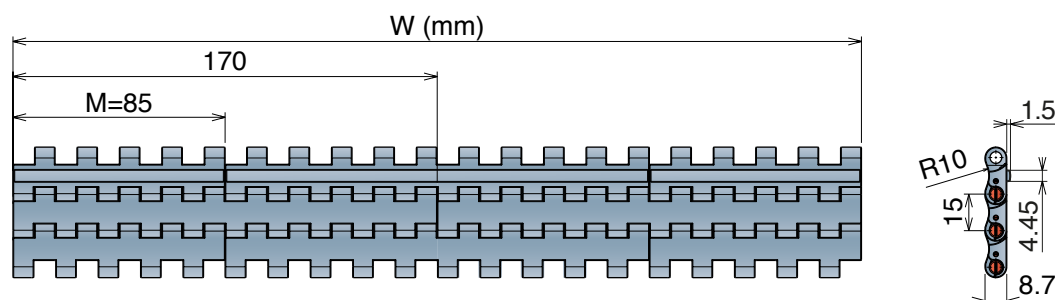

Version B - With 1 Positioner



Version C - With 2 Positioner

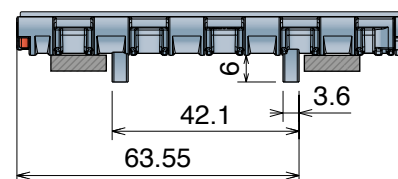

Version A - Standard

Series	Material	Width	Version	RIB
5261	*	0085	A	XR3 or XR5
5261	*	0170	A	XR3 or XR5
5261	*	0255	A	XR3 or XR5
5261	*	0340	A	XR3 or XR5
5261	*	0425	A	XR3 or XR5
5261	*	0510	A	XR3 or XR5
5261	*	0595	A	XR3 or XR5
5261	*	0680	A	XR3 or XR5
5261	*	0765	A	XR3 or XR5
5261	*	0850	A	XR3 or XR5
5261	*	0935	A	XR3 or XR5
5261	*	1020	A	XR3 or XR5
5261	*	1105	A	XR3 or XR5
5261	*	1190	A	XR3 or XR5
5261	*	1275	A	XR3 or XR5
5261	*	1360	A	XR3 or XR5
5261	*	1445	A	XR3 or XR5
5261	*	1530	A	XR3 or XR5

XR3 (RIB every 3 links) | XR5 (RIB every 5 links)

Version B - With 1 Positioner

Series	Material	Width	Version	RIB
5261	*	0085	B	XR3 or XR5
5261	*	0170	B	XR3 or XR5
5261	*	0255	B	XR3 or XR5
5261	*	0340	B	XR3 or XR5
5261	*	0425	B	XR3 or XR5
5261	*	0510	B	XR3 or XR5
5261	*	0595	B	XR3 or XR5
5261	*	0680	B	XR3 or XR5
5261	*	0765	B	XR3 or XR5
5261	*	0850	B	XR3 or XR5
5261	*	0935	B	XR3 or XR5
5261	*	1020	B	XR3 or XR5
5261	*	1105	B	XR3 or XR5
5261	*	1190	B	XR3 or XR5
5261	*	1275	B	XR3 or XR5
5261	*	1360	B	XR3 or XR5
5261	*	1445	B	XR3 or XR5
5261	*	1530	B	XR3 or XR5

XR3 (RIB every 3 links) | XR5 (RIB every 5 links)

Version C - With 2 Positioners

Series	Material	Width	Version	RIB
5261	*	0085	C	XR3 or XR5
5261	*	0170	C	XR3 or XR5
5261	*	0255	C	XR3 or XR5
5261	*	0340	C	XR3 or XR5
5261	*	0425	C	XR3 or XR5
5261	*	0510	C	XR3 or XR5
5261	*	0595	C	XR3 or XR5
5261	*	0680	C	XR3 or XR5
5261	*	0765	C	XR3 or XR5
5261	*	0850	C	XR3 or XR5
5261	*	0935	C	XR3 or XR5
5261	*	1020	C	XR3 or XR5
5261	*	1105	C	XR3 or XR5
5261	*	1190	C	XR3 or XR5
5261	*	1275	C	XR3 or XR5
5261	*	1360	C	XR3 or XR5
5261	*	1445	C	XR3 or XR5
5261	*	1530	C	XR3 or XR5

XR3 (RIB every 3 links) | XR5 (RIB every 5 links)

525 FTT

Tappeto Modulare 525 FTT, H=8,7 M=85

Modular Belt Series 525 FTT, H=8,7 M=85 / Modulare Mattenkette 525 FTT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5256	01	0085	C
Series	*Material	Width	Version

		
pg. 317	273/277/280	pg. 651>661


*Material

LFA - Code 01	MX - Code 03
Low friction Acetal	Performance PBT


Max w. load:	21500 N/m	Max w. load:	17500 N/m
Weight:	7,8 kg/m ²	Weight:	7,5 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey

15.0mm
PITCH

Metric Size

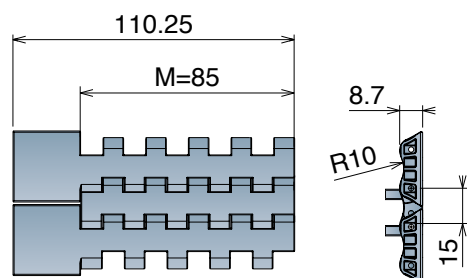

Version C




Version C

Series	Material	Width	Version
5256	*	0085	C

Max working load (N)

Width	85
LFA	1850
MX	1500

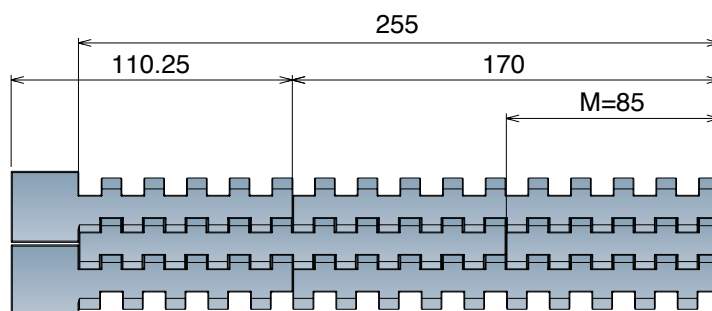

Version CN - Near



Version C0 - Opposite



Version CN - Near

Series	Material	Width	Version
5256	*	0170	CN
5256	*	0255	CN

Version C0 - Opposite

Series	Material	Width	Version
5256	*	0170	C0
5256	*	0255	C0

525 HD FG Open Surface 35%

Tappeto Modulare 525 HD Flush grid, H=8,7 M=85
Modular Belt Series 525 HD Flush grid, H=8,7 M=85 / Modulare Mattenkette 525 HD Flush grid, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 25 mm

5262	01	0085	A
Series	*Material	Width	Version

pg. 317	273/277/280	pg. 651>661

SAMPLE BOX

Art.-Nr. 5262018888A

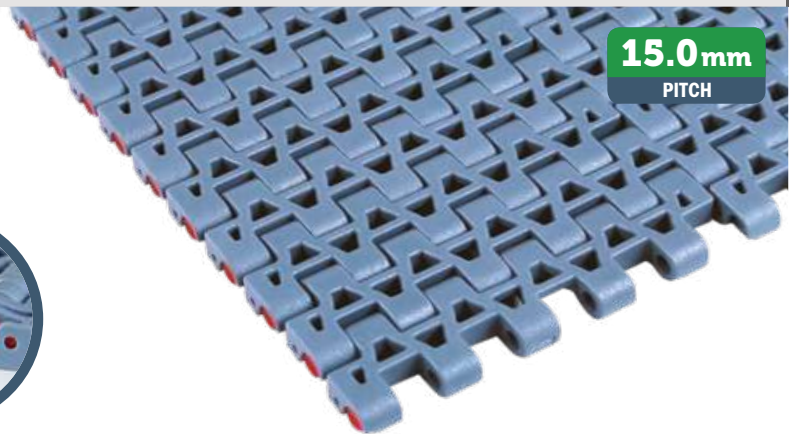15.0mm
PITCH

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 25500 N/m
Weight: 8,1 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 20500 N/m
Weight: 7,8 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

LFB - Code 23

Low friction Acetal

Max w. load: 25500 N/m
Weight: 8,1 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white


PFX - Code 30

Extra performance PBT


Max w. load: 20500 N/m
Weight: 7,8 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

**THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS**


Version A - Standard

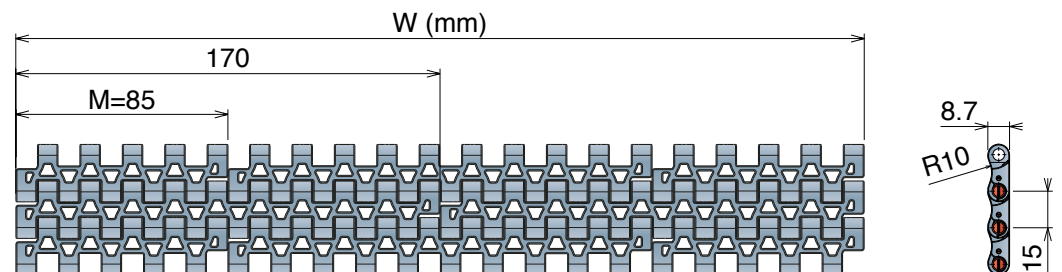

Version B - With 1 Positioner



Version C - With 2 Positioners

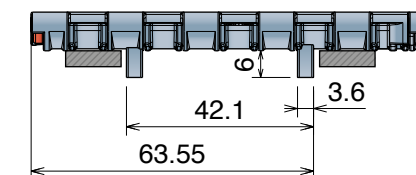

Version A - Standard

Series	Material	Width	Version
5262	*	0085	A
5262	*	0170	A
5262	*	0255	A
5262	*	0340	A
5262	*	0425	A
5262	*	0510	A
5262	*	0595	A
5262	*	0680	A
5262	*	0765	A
5262	*	0850	A
5262	*	0935	A
5262	*	1020	A
5262	*	1105	A
5262	*	1190	A
5262	*	1275	A
5262	*	1360	A
5262	*	1445	A
5262	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5262	*	0085	B
5262	*	0170	B
5262	*	0255	B
5262	*	0340	B
5262	*	0425	B
5262	*	0510	B
5262	*	0595	B
5262	*	0680	B
5262	*	0765	B
5262	*	0850	B
5262	*	0935	B
5262	*	1020	B
5262	*	1105	B
5262	*	1190	B
5262	*	1275	B
5262	*	1360	B
5262	*	1445	B
5262	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5262	*	0085	C
5262	*	0170	C
5262	*	0255	C
5262	*	0340	C
5262	*	0425	C
5262	*	0510	C
5262	*	0595	C
5262	*	0680	C
5262	*	0765	C
5262	*	0850	C
5262	*	0935	C
5262	*	1020	C
5262	*	1105	C
5262	*	1190	C
5262	*	1275	C
5262	*	1360	C
5262	*	1445	C
5262	*	1530	C

525 HD GT

Tappeto Modulare 525 HD GT, H=8,7 M=85
Modular Belt Series 525 HD GT, H=8,7 M=85 / Modulare Mattenkette 525 HD GT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 25 mm

5263	01	0085	A
Series	*Material	Width	Version

		
pg. 317	273/277/280	pg. 651>661

SAMPLE BOX

Art.-Nr. 5263018888A

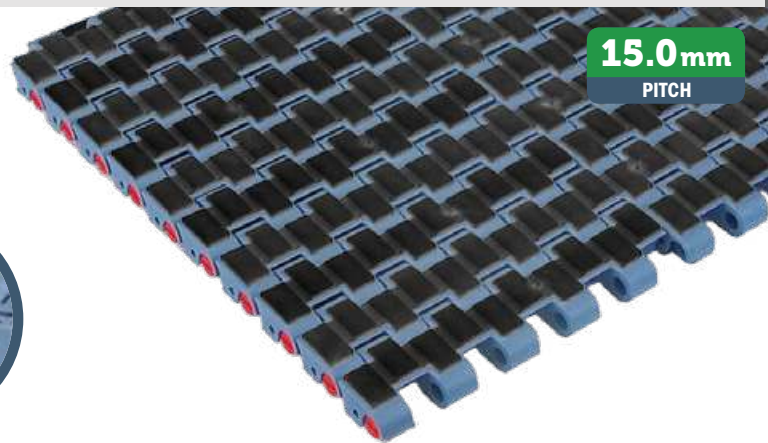

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 25500 N/m
Weight: 10,35 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white
Top rubber: 50 ShA- Dark grey

PP - Code 02

Polypropylene


Max w. load: 15500 N/m
Weight: 8,7 kg/m²
Temp. range dry: 4÷80 °C
Temp. range wet: 4÷80 °C
Pin material: PP blue
Top rubber: 50 ShA- Pigeon blue

MX - Code 03


Performance PBT

Max w. load: 20500 N/m
Weight: 10,35 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey
Top rubber: 50 ShA- Dark grey


Version A - Standard

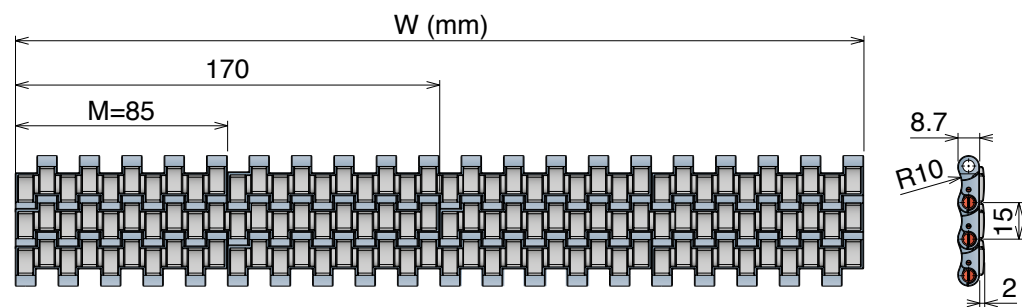

Version B - With 1 Positioner

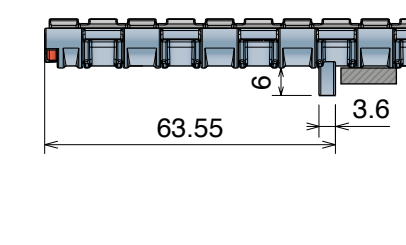

Version C - With 2 Positioner

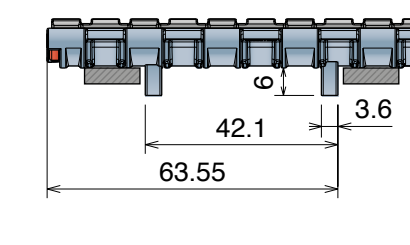

Version A - Standard

Series	Material	Width	Version
5263	*	0085	A
5263	*	0170	A
5263	*	0255	A
5263	*	0340	A
5263	*	0425	A
5263	*	0510	A
5263	*	0595	A
5263	*	0680	A
5263	*	0765	A
5263	*	0850	A
5263	*	0935	A
5263	*	1020	A
5263	*	1105	A
5263	*	1190	A
5263	*	1275	A
5263	*	1360	A
5263	*	1445	A
5263	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5263	*	0085	B
5263	*	0170	B
5263	*	0255	B
5263	*	0340	B
5263	*	0425	B
5263	*	0510	B
5263	*	0595	B
5263	*	0680	B
5263	*	0765	B
5263	*	0850	B
5263	*	0935	B
5263	*	1020	B
5263	*	1105	B
5263	*	1190	B
5263	*	1275	B
5263	*	1360	B
5263	*	1445	B
5263	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5263	*	0085	C
5263	*	0170	C
5263	*	0255	C
5263	*	0340	C
5263	*	0425	C
5263	*	0510	C
5263	*	0595	C
5263	*	0680	C
5263	*	0765	C
5263	*	0850	C
5263	*	0935	C
5263	*	1020	C
5263	*	1105	C
5263	*	1190	C
5263	*	1275	C
5263	*	1360	C
5263	*	1445	C
5263	*	1530	C

525 HD GT Side indent

Tappeti modulari / Modular belts / Mattenketten

Belts wider than standard are available with 85 mm increments

525 HD GT Side Indent

Tappeto Modulare 525 HD GT Side Indent, H=8,7 M=85

Modular Belt Series 525 HD GT Side Indent, H=8,7 M=85 / Modulare Mattenkette 525 HD GT Side Indent, H=8,7 M=85


CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5265	01	0255	A
Series	*Material	Width	Version

		
pg. 317	273/277/280	pg. 651>661

15.0mm
PITCH

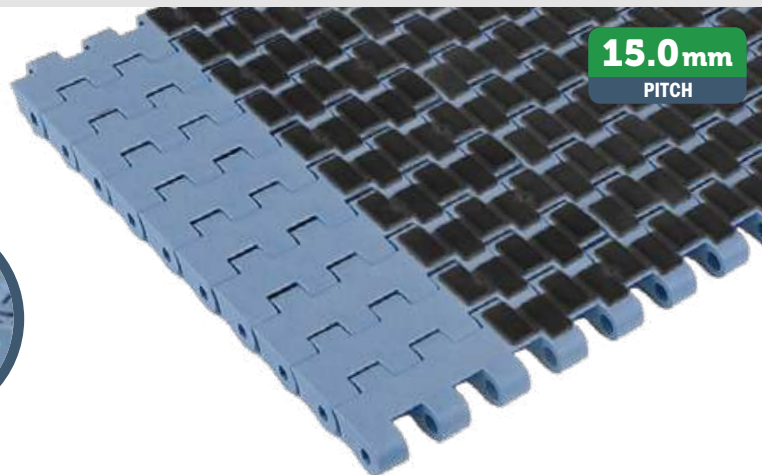

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 25500 N/m
Weight: 10,35 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white
Top rubber: 50 ShA- Dark grey

PP - Code 02

Polypropylene


Max w. load: 15500 N/m
Weight: 8,7 kg/m²
Temp. range dry: 4÷80 °C
Temp. range wet: 4÷80 °C
Pin material: PP blue
Top rubber: 50 ShA- Pigeon blue

MX - Code 03


Performance PBT

Max w. load: 20500 N/m
Weight: 10,35 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey
Top rubber: 50 ShA- Dark grey


Version A - Standard

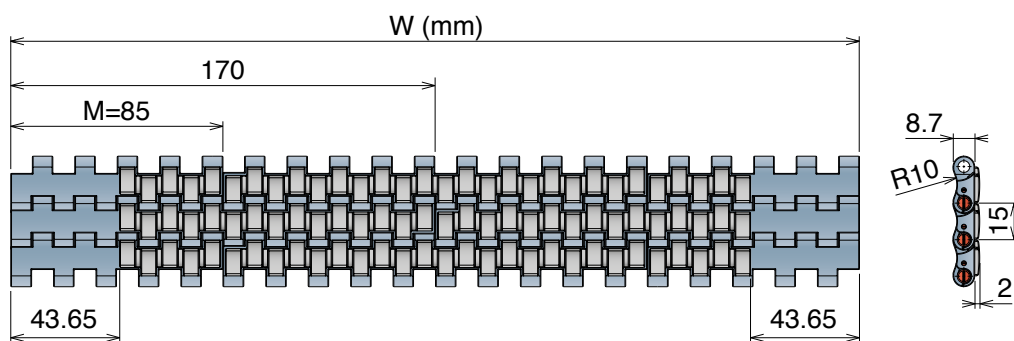

Version B - With 1 Positioner

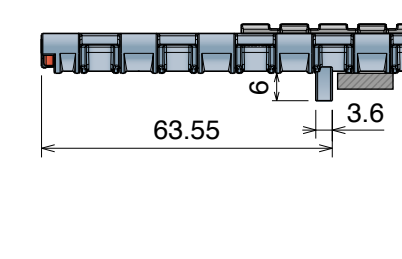

Version C - With 2 Positioner

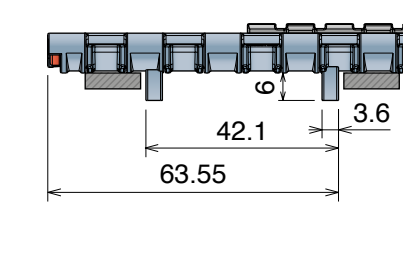

Version A - Standard

Series	Material	Width	Version
5265	*	0255	A
5265	*	0340	A
5265	*	0425	A
5265	*	0510	A
5265	*	0595	A
5265	*	0680	A
5265	*	0765	A
5265	*	0850	A
5265	*	0935	A
5265	*	1020	A
5265	*	1105	A
5265	*	1190	A
5265	*	1275	A
5265	*	1360	A
5265	*	1445	A
5265	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5265	*	0255	B
5265	*	0340	B
5265	*	0425	B
5265	*	0510	B
5265	*	0595	B
5265	*	0680	B
5265	*	0765	B
5265	*	0850	B
5265	*	0935	B
5265	*	1020	B
5265	*	1105	B
5265	*	1190	B
5265	*	1275	B
5265	*	1360	B
5265	*	1445	B
5265	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5265	*	0255	C
5265	*	0340	C
5265	*	0425	C
5265	*	0510	C
5265	*	0595	C
5265	*	0680	C
5265	*	0765	C
5265	*	0850	C
5265	*	0935	C
5265	*	1020	C
5265	*	1105	C
5265	*	1190	C
5265	*	1275	C
5265	*	1360	C
5265	*	1445	C
5265	*	1530	C

530

Pitch 15,0 mm

H= 8,7 mm



530 FT

530 FTT

530 GT

530 GT *Side indent*

530 LBP

530 PRO LBP

530 FT

Tappeto Modulare 530 FT, H=8,7 M=3"

Modular Belt Series 530 FT, H=8,7 M=3" / Modulare Mattenkette 530 FT, H=8,7 M=3"


CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5321	01	0003	A
Series	*Material	Width	Version

		
pg. 317	275/278/281	pg. 651>661

SAMPLE BOX

Art.-Nr. **5321018888A**
15.0mm
PITCH

Imperial Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 26000 N/m
 Weight: 9,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 21000 N/m
 Weight: 9,0 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

DKM - Code 16

Aramide Reinforced Acetal

Max w. load: 26000 N/m
 Weight: 9,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MWX - Code 17

Polyamide Composite


Max w. load: 26000 N/m
 Weight: 9,5 kg/m²
 Temp. range dry: -40÷104 °C
 Temp. range wet: NR
 Pin material: PBT white

MPX - Code 25

Lubricated Acetal

Max w. load: 26000 N/m
 Weight: 9,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

Version A - Standard

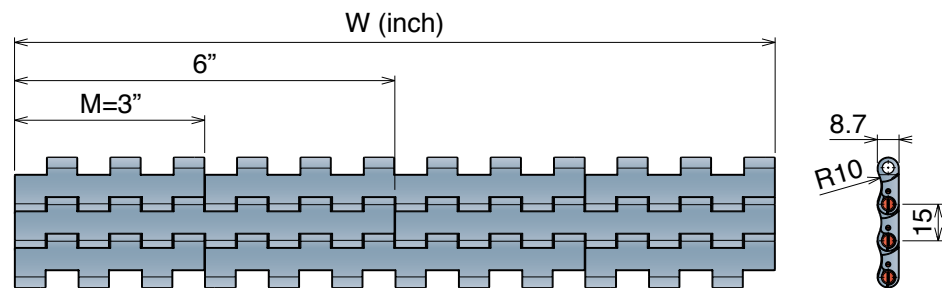

Version A - Standard

Series	Material	Width	Version
5321	*	0003	A
5321	*	0006	A
5321	*	0009	A
5321	*	0012	A
5321	*	0015	A
5321	*	0018	A
5321	*	0021	A
5321	*	0024	A
5321	*	0027	A
5321	*	0030	A
5321	*	0033	A
5321	*	0036	A
5321	*	0039	A
5321	*	0042	A
5321	*	0045	A
5321	*	0048	A
5321	*	0051	A
5321	*	0054	A

530 FTT

Tappeto Modulare 530 FTT, H=8,7 M=3"

Modular Belt Series 530 FTT, H=8,7 M=3" / Modulare Mattenkette 530 FTT, H=8,7 M=3"

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 25 mm

5326	01	0003	A
Series	*Material	Width	Version

		
pg. 317	275/278/281	pg. 651>661

15.0mm
PITCH

Imperial Size



*Material

LFA - Code 01

Low friction Acetal


Max w. load: 26000 N/m
 Weight: 9,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 21000 N/m
 Weight: 9,0 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

Version A - Standard

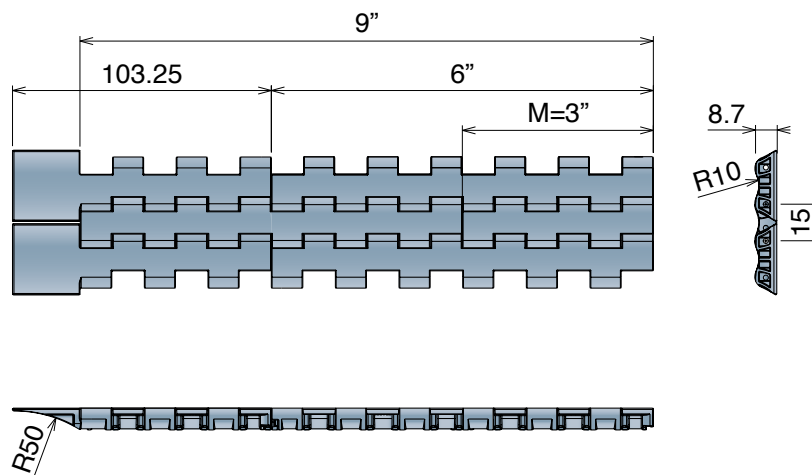

Version A - Standard

Series	Material	Width	Version
5326	*	0003	A
5326	*	0006	A
5326	*	0009	A



530 GT

Tappeto Modulare 530 GT, H=8,7 M=3"

Modular Belt Series 530 GT, H=8,7 M=3" / Modulare Mattenkette 530 GT, H=8,7 M=3"


CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 30 mm


5323	01	0003	A
Series	*Material	Width	Version



pg. 317




275/278/281



pg. 651>661

SAMPLE BOX

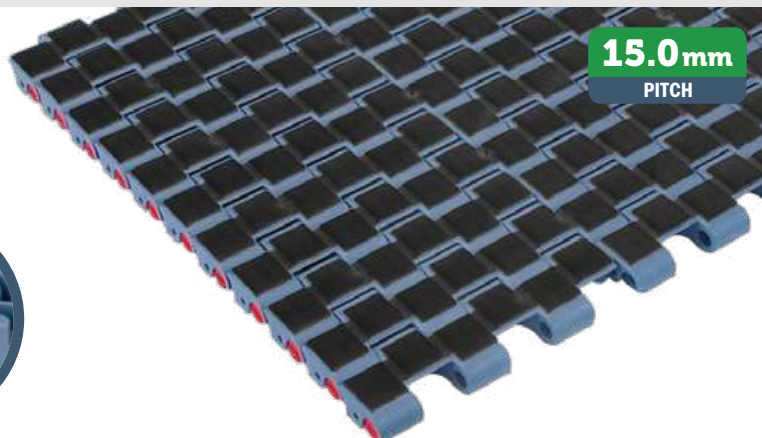Art.-Nr. **5323018888A****15.0mm**
PITCH

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 26000 N/m
 Weight: 10,6 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white
 Top rubber: 50 ShA-Dark grey

PP - Code 02

Polypropylene



Max w. load: 16000 N/m
 Weight: 9,0 kg/m²
 Temp. range dry: 4÷80 °C
 Temp. range wet: 4÷80 °C
 Pin material: PP blue
 Top rubber: 50 ShA-Pigeon blue

MX - Code 03

Performance PBT

Max w. load: 21000 N/m
 Weight: 10,6 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey
 Top rubber: 50 ShA-Dark grey

Version A - Standard

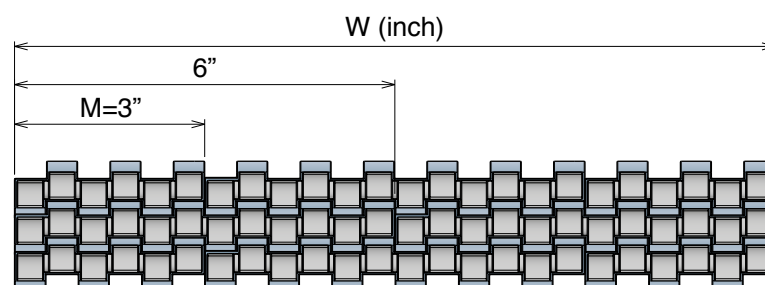

Version A - Standard

Series	Material	Width	Version
5323	*	0003	A
5323	*	0006	A
5323	*	0009	A
5323	*	0012	A
5323	*	0015	A
5323	*	0018	A
5323	*	0021	A
5323	*	0024	A
5323	*	0027	A
5323	*	0030	A
5323	*	0033	A
5323	*	0036	A
5323	*	0039	A
5323	*	0042	A
5323	*	0045	A
5323	*	0048	A
5323	*	0051	A
5323	*	0054	A

530 GT Side indent

Tappeto Modulare 530 GT, H=8,7 M=3"
Modular Belt Series 530 GT, H=8,7 M=3" / Modulare Mattenkette 530 GT, H=8,7 M=3"



CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 30 mm

5325	01	0009	A
Series	*Material	Width	Version

		
pg. 317	275/278/281	pg. 651>661

15.0mm
PITCH

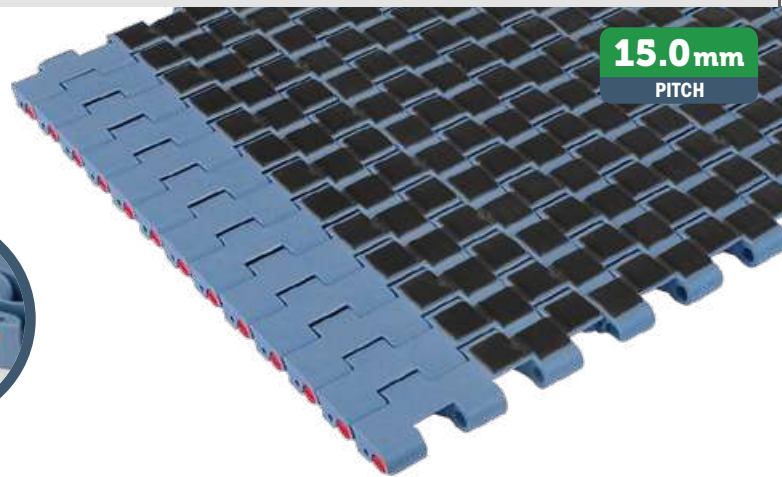

Imperial Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 26000 N/m
Weight: 10,6 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white
Top rubber: 50 ShA-Dark grey

PP - Code 02

Polypropylene


Max w. load: 16000 N/m
Weight: 9,0 kg/m²
Temp. range dry: 4÷80 °C
Temp. range wet: 4÷80 °C
Pin material: PP blue
Top rubber: 50 ShA-Pigeon blue

MX - Code 03

Performance PBT

Max w. load: 21000 N/m
Weight: 10,6 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey
Top rubber: 50 ShA-Dark grey

Version A - Standard

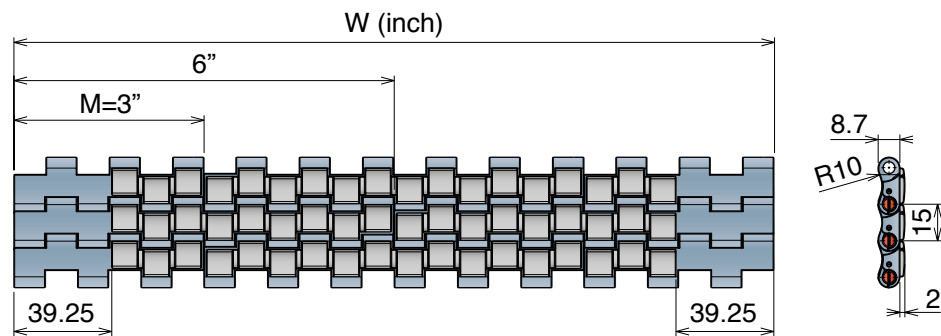

Version A - Standard

Series	Material	Width	Version
5325	*	0009	A
5325	*	0012	A
5325	*	0015	A
5325	*	0018	A
5325	*	0021	A
5325	*	0024	A
5325	*	0027	A
5325	*	0030	A
5325	*	0033	A
5325	*	0036	A
5325	*	0039	A
5325	*	0042	A
5325	*	0045	A
5325	*	0048	A
5325	*	0051	A
5325	*	0054	A

530 LBP

Tappeto Modulare 530 LBP, H=8,7 M=3"

Modular Belt Series 530 LBP, H=8,7 M=3" / Modulare Mattenkette 530 LBP, H=8,7 M=3"

CODE STRUCTURE GUIDE (Example)



Backflex radius min.: 25 mm

5324	01	0006	A
Series	*Material	Width	Version

		
pg. 317	pg. 275/279	pg. 651>661

SAMPLE BOX

Art.-Nr. 5324018888A

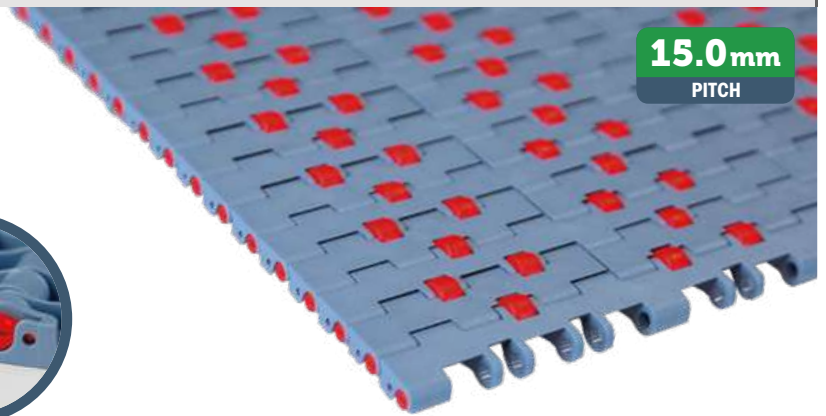

15.0mm
PITCH

Material

LFA - Code 01


Low friction Acetal

Max w. load: 24000 N/m
Weight: 9,0 kg/m²
Temp. range dry: -40+80 °C
Temp. range dry: -40+65 °C
Pin material: PBT white

POM Roller

Density: 700 rollers/m²


Version A - Standard

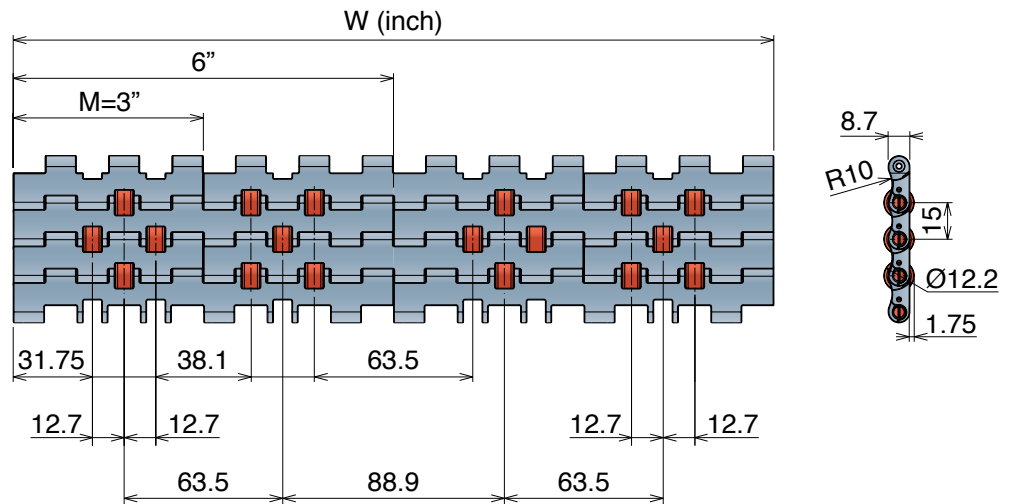

Version A - Standard


Series	Material	Width	Version
5324	01	0006	A
5324	01	0012	A
5324	01	0018	A
5324	01	0024	A
5324	01	0030	A
5324	01	0036	A
5324	01	0042	A
5324	01	0048	A
5324	01	0054	A

Guide position for accumulation system - Example

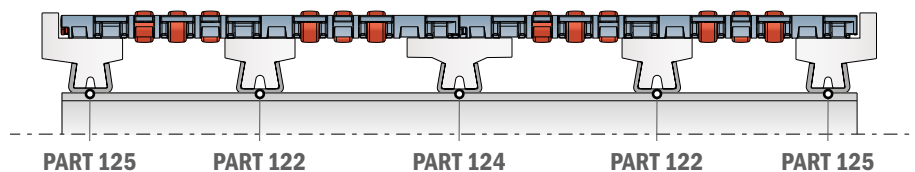

For accumulation system, please place the wear strips between the rollers (max 50 mm).

Guide position for driven rollers, for alignment/distribution system - Example

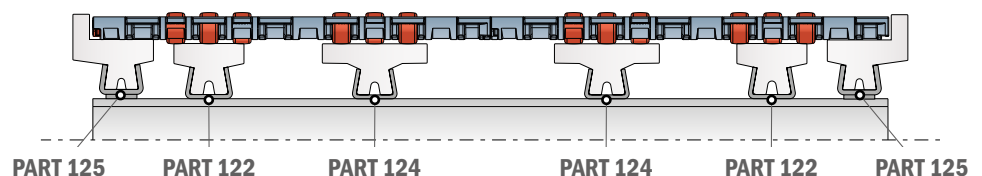

For driven rollers, please place the wear strips directly in contact under the rollers.

530 LBP can also be used with standard profiles: consult extruded profiles section for more details.

NEW

530 PRO LBP

Tappeto Modulare 530 PRO LBP, H=8,7 M=3"

Modular Belt Series 530 PRO LBP, H=8,7 M=3" / Modulare Mattenkette 530 PRO LBP, H=8,7 M=3"

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5237	01	0006	A
Series	*Material	Width	Version

		
pg. 317	pg. 276/279	pg. 651>661

SAMPLE BOX

Art.-Nr. 5237018888A



- Easier installation
- Quicker maintenance
- High strength

15.0mm
PITCH

Imperial Size

Material

LFA - Code 01

Low friction Acetal


Max w. load: 21000 N/m
 Weight: 10,0 kg/m²
 Temp. range dry: -40+80 °C
 Temp. range wet: -40+65 °C
 Pin material: PBT white

PFX Roller


Density: 3.400 rollers/m²

THE BEST CHOICE TO REACH
THE LOWEST FRICTION

Version A - Standard

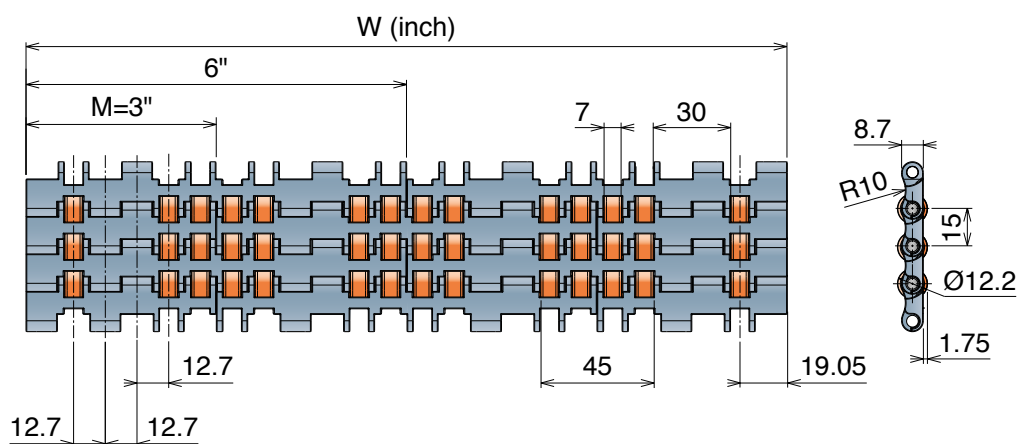


Guide position for accumulation system - Example

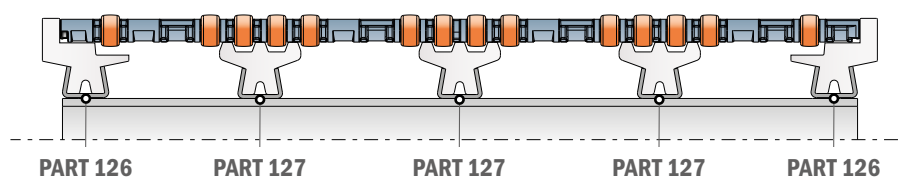


For accumulation system, please place the wear strips between the rollers (max 25 mm).

Guide position for driven rollers, for alignment/distribution system - Example

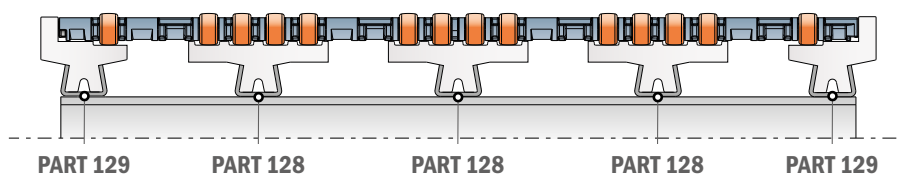

For driven rollers, please place the wear strips directly in contact under the rollers.

530 PRO LBP can also be used with standard profiles: consult extruded profiles section for more details.



Rollers configuration for
530 PRO LBP,
6 inch wide belt.

550

Pitch 25,4 mm
H= 8,7 mm



Metric Size

550 FT
550 FT *One track Belt*
550 FTT
550 FG
550 FG *One track Belt*
550 GT

550 GT *Side indent*
550 FLIGHT TOP
550 PRO FT
550 PRO M

550 FT

Tappeto Modulare 550 FT, H=8,7 M=85

Modular Belt Series 550 FT, H=8,7 M=85 / Modulare Mattenkette 550 FT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5501	01	0085	A
Series	*Material	Width	Version

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 30000 N/m
 Weight: 8,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

PP - Code 02

Polypropylene

Max w. load: 18000 N/m
 Weight: 8,4 kg/m²
 Temp. range dry: 4÷104 °C
 Temp. range wet: 4÷104 °C
 Pin material: PP blue

MX - Code 03

Performance PBT

Max w. load: 24000 N/m
 Weight: 8,2 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

LFW - Code 05

Low friction Acetal

Max w. load: 30000 N/m
 Weight: 8,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

DKM - Code 16

Aramid Reinforced Acetal

Max w. load: 30000 N/m
 Weight: 8,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MWX - Code 17

Polyamide Composite

Max w. load: 30000 N/m
 Weight: 8,9 kg/m²
 Temp. range dry: -40÷104 °C
 Temp. range wet: NR
 Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load: 30000 N/m
 Weight: 8,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

PFX - Code 30

Extra performance PBT


Max w. load: 24000 N/m
 Weight: 8,2 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey



- Easier installation
- Quicker maintenance
- 100% interchangeable



pg. 319/320




pg. 651>661


SAMPLE BOX

Art.-Nr. 5501018888A


Version A - Standard

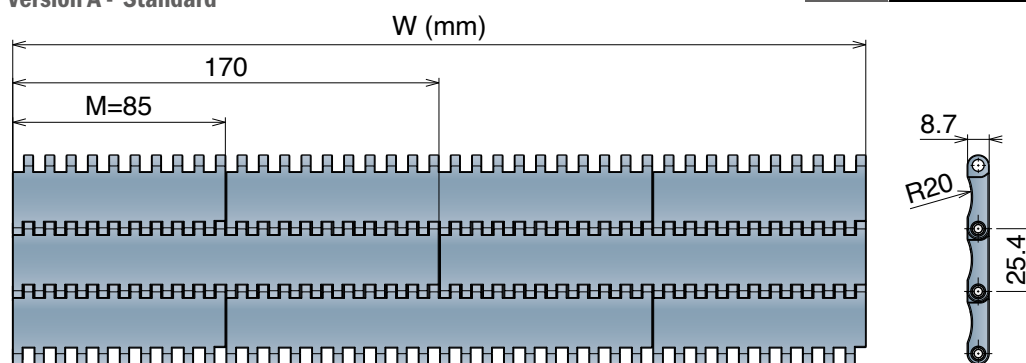

Version B - With 1 Positioner

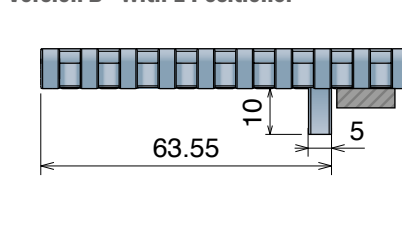

Version C - With 2 Positioner

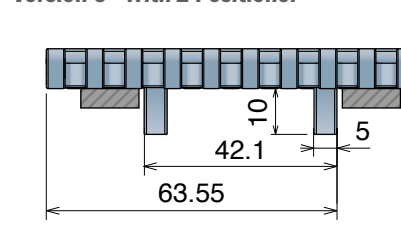

Version A - Standard

Series	Material	Width	Version
5501	*	0085	A
5501	*	0170	A
5501	*	0255	A
5501	*	0340	A
5501	*	0425	A
5501	*	0510	A
5501	*	0595	A
5501	*	0680	A
5501	*	0765	A
5501	*	0850	A
5501	*	0935	A
5501	*	1020	A
5501	*	1105	A
5501	*	1190	A
5501	*	1275	A
5501	*	1360	A
5501	*	1445	A
5501	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5501	*	0085	B
5501	*	0170	B
5501	*	0255	B
5501	*	0340	B
5501	*	0425	B
5501	*	0510	B
5501	*	0595	B
5501	*	0680	B
5501	*	0765	B
5501	*	0850	B
5501	*	0935	B
5501	*	1020	B
5501	*	1105	B
5501	*	1190	B
5501	*	1275	B
5501	*	1360	B
5501	*	1445	B
5501	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5501	*	0085	C
5501	*	0170	C
5501	*	0255	C
5501	*	0340	C
5501	*	0425	C
5501	*	0510	C
5501	*	0595	C
5501	*	0680	C
5501	*	0765	C
5501	*	0850	C
5501	*	0935	C
5501	*	1020	C
5501	*	1105	C
5501	*	1190	C
5501	*	1275	C
5501	*	1360	C
5501	*	1445	C
5501	*	1530	C

550 FT One track Belt

Tappeto Modulare 550 FT, H=8,7 K330
Modular Belt Series 550 FT, H=8,7 K330 / Modulare Mattenkette 550 FT, H=8,7 K330

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5221	01	9330	A
Series	*Material	Width	Version

	
pg. 319/320	pg. 651>661

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 2500 N
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PP - Code 02

Polypropylene

Max w. load: 1500 N
Weight: 8,4 kg/m²
Temp. range dry: 4÷104 °C
Temp. range wet: 4÷104 °C
Pin material: PP blue

MX - Code 03

Performance PBT

Max w. load: 2000 N
Weight: 8,2 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

DKM - Code 16

Aramid Reinforced Acetal

Max w. load: 2500 N
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MWX - Code 17

Polyamide Composite

Max w. load: 2500 N
Weight: 8,9 kg/m²
Temp. range dry: -40÷104 °C
Temp. range wet: NR
Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load: 2500 N
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PFX - Code 30

Extra performance PBT


Max w. load: 2000 N
Weight: 8,2 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

**THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS**




- Easier installation
- Quicker maintenance
- 10% Higher strength

Version A - Standard

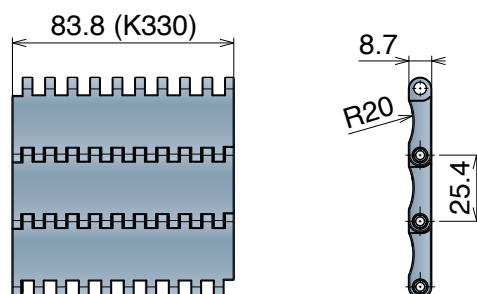


Series	Material	Width	Version
5221	*	9330	A

Version C - With 2 Positioner

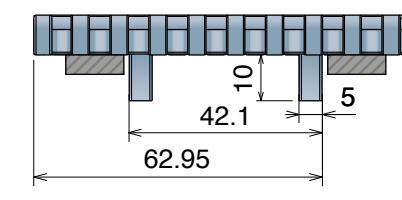

Series	Material	Width	Version
5221	*	9330	C

Disassembling / Assembling mode

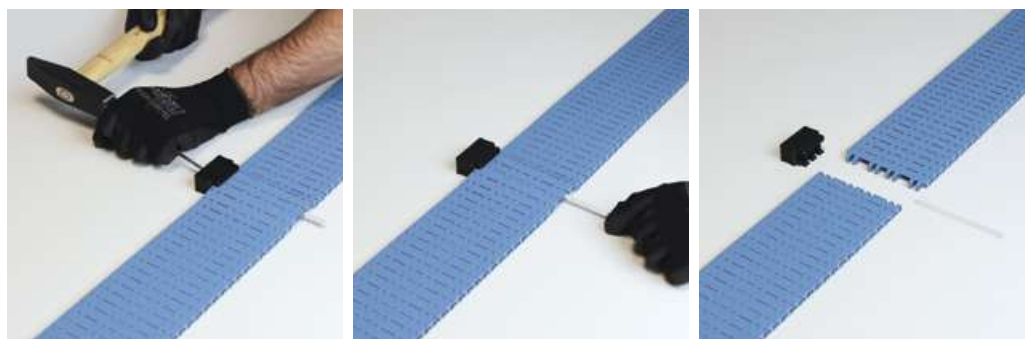

NEW

550 FT One track belt MOVEX TOOL

The specific tool for belts developed to facilitate belt assembly and disassembly.



Article Nr. 29970

Movex tools are made with 3D printer, the color may vary due to availability of the material.

Movex

550 FTT


Tappeto Modulare 550 FTT, H=8,7 M=85

Modular Belt Series 550 FTT, H=8,7 M=85 / Modulare Mattenkette 550 FTT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5506	01	0085	C
Series	*Material	Width	Version




*Material

LFA - Code 01	MX - Code 03
Low friction Acetal	Performance PBT


Max w. load:	30000 N/m	Max w. load:	24000 N/m
Weight:	8,5 kg/m ²	Weight:	8,2 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey



- Easier installation
- Quicker maintenance
- 100% interchangeable

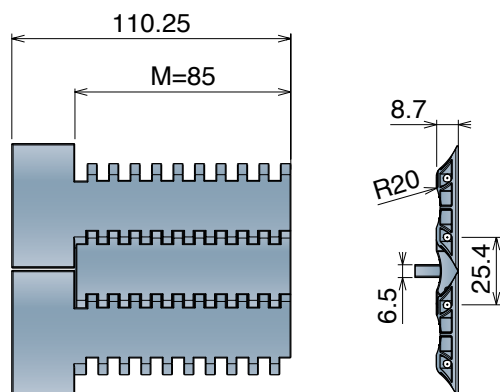

Version C




Version C

Series	Material	Width	Version
5506	*	0085	C

Max working load (N)

Width	85
LFA	2300
MX	1850

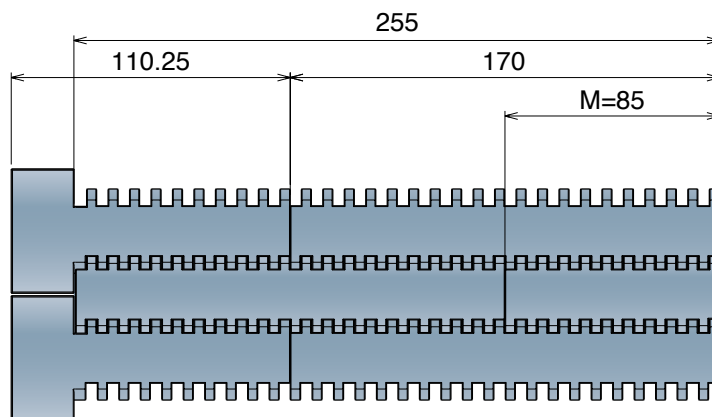

Version CN - Near



Version C0 - Opposite



Version CN - Near

Series	Material	Width	Version
5506	*	0170	CN
5506	*	0255	CN

Version C0 - Opposite

Series	Material	Width	Version
5506	*	0170	C0
5506	*	0255	C0

550 FG Open Surface 25%

Tappeto Modulare 550 FG, H=8,7 M=85
Modular Belt Series 550 FG, H=8,7 M=85 / Modulare Mattenkette 550 FG, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5222	01	0085	A
Series	*Material	Width	Version



pg. 319/320



pg. 651>661

SAMPLE BOX

Art.-Nr. 5222018888A

25.4mm
PITCH

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 27500 N/m
Weight: 7,0 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 22000 N/m
Weight: 6,7 kg/m²
Temp. range dry: -40+120 °C
Temp. range wet: -40+60 °C
Pin material: POM grey

LFB - Code 23

Low friction Acetal

Max w. load: 27500 N/m
Weight: 7,0 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white


PFX - Code 30

Extra performance PBT


Max w. load: 22000 N/m
Weight: 6,7 kg/m²
Temp. range dry: -40+120 °C
Temp. range wet: -40+60 °C
Pin material: POM grey

THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS


Version A - Standard

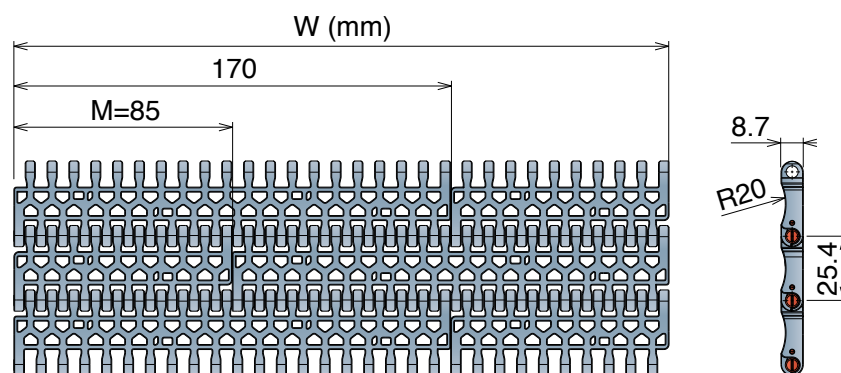

Version B - With 1 Positioner

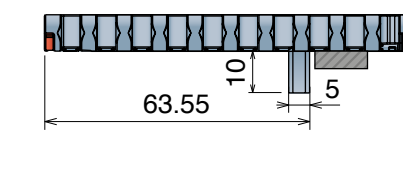

Version C - With 2 Positioner

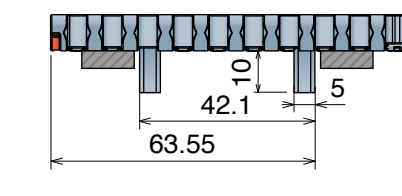

Version A - Standard

Series	Material	Width	Version
5222	*	0085	A
5222	*	0170	A
5222	*	0255	A
5222	*	0340	A
5222	*	0425	A
5222	*	0510	A
5222	*	0595	A
5222	*	0680	A
5222	*	0765	A
5222	*	0850	A
5222	*	0935	A
5222	*	1020	A
5222	*	1105	A
5222	*	1190	A
5222	*	1275	A
5222	*	1360	A
5222	*	1445	A
5222	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5222	*	0085	B
5222	*	0170	B
5222	*	0255	B
5222	*	0340	B
5222	*	0425	B
5222	*	0510	B
5222	*	0595	B
5222	*	0680	B
5222	*	0765	B
5222	*	0850	B
5222	*	0935	B
5222	*	1020	B
5222	*	1105	B
5222	*	1190	B
5222	*	1275	B
5222	*	1360	B
5222	*	1445	B
5222	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5222	*	0085	C
5222	*	0170	C
5222	*	0255	C
5222	*	0340	C
5222	*	0425	C
5222	*	0510	C
5222	*	0595	C
5222	*	0680	C
5222	*	0765	C
5222	*	0850	C
5222	*	0935	C
5222	*	1020	C
5222	*	1105	C
5222	*	1190	C
5222	*	1275	C
5222	*	1360	C
5222	*	1445	C
5222	*	1530	C


550 FG One track Belt Open Surface 25%

Tappeto Modulare 550 FG, H=8,7 K330
Modular Belt Series 550 FG, H=8,7 K330 / Modulare Mattenkette 550 FG, H=8,7 K330

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5222	01	9330	A
Series	*Material	Width	Version



25.4mm
PITCH

Metric Size

*Material

LFA - Code 01
Low friction Acetal

Easy Delivery

Max w. load: 2300 N
Weight: 7,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03
Performance PBT

Max w. load: 1850 N
Weight: 6,7 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

LFB - Code 23
Low friction Acetal


Max w. load: 2300 N
Weight: 7,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PFX - Code 30
Extra performance PBT


Max w. load: 1850 N
Weight: 6,7 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

**THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS**

Version A - Standard

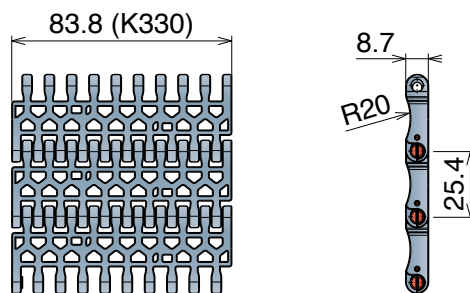

Version C - With 2 Positioner

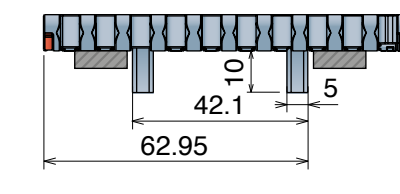

Version A - Standard

Series	Material	Width	Version
5222	*	9330	A

Version C - With 2 Positioners

Series	Material	Width	Version
5222	*	9330	C

550 GT

Tappeto Modulare 550 GT, H=8,7 M=85

Modular Belt Series 550 GT, H=8,7 M=85 / Modulare Mattenkette 550 GT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 30 mm

5503	01	0085	A
Series	*Material	Width	Version



pg. 319/320



pg. 651>661

SAMPLE BOX

Art.-Nr. 5503018888A

Pin Sphere®
AUTO LOCK

- Easier installation
- Quicker maintenance
- 100% interchangeable

25.4 mm
PITCH

*Material

LFA - Code 01

Low friction Acetal

Max w. load: 27500 N/m
 Weight: 10,1 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white
 Top rubber: 50 ShA-Dark grey

PP - Code 02

Polypropylene


Max w. load: 16500 N/m
 Weight: 8,4 kg/m²
 Temp. range dry: 4÷80 °C
 Temp. range wet: 4÷80 °C
 Pin material: PP blue
 Top rubber: 50 ShA-Pigeon blue

MX - Code 03


Performance PBT

Max w. load: 21500 N/m
 Weight: 10,5 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey
 Top rubber: 50 ShA-Dark grey


Version A - Standard

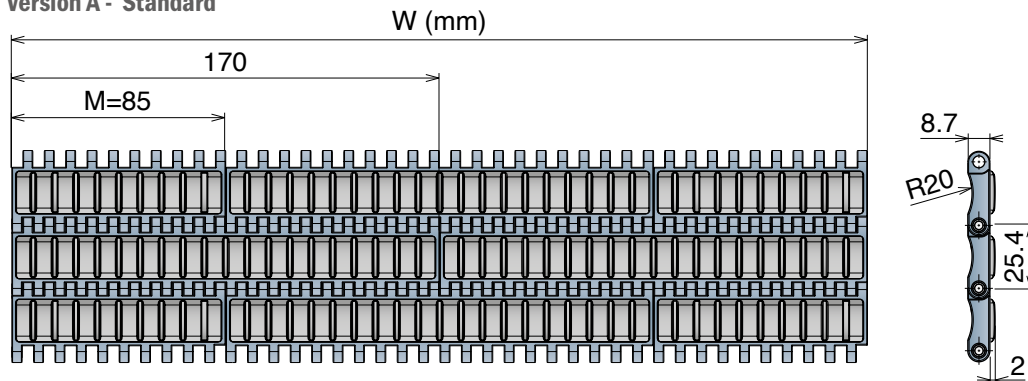

Version B - With 1 Positioner

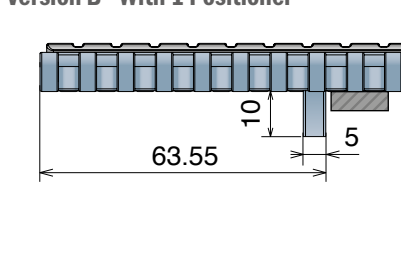

Version C - With 2 Positioner

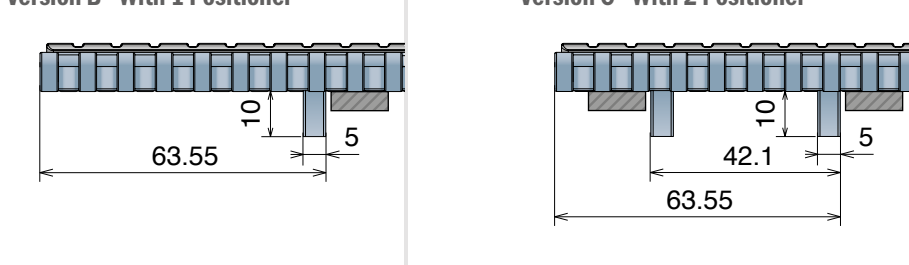

Version A - Standard

Series	Material	Width	Version
5503	*	0085	A
5503	*	0170	A
5503	*	0255	A
5503	*	0340	A
5503	*	0425	A
5503	*	0510	A
5503	*	0595	A
5503	*	0680	A
5503	*	0765	A
5503	*	0850	A
5503	*	0935	A
5503	*	1020	A
5503	*	1105	A
5503	*	1190	A
5503	*	1275	A
5503	*	1360	A
5503	*	1445	A
5503	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5503	*	0085	B
5503	*	0170	B
5503	*	0255	B
5503	*	0340	B
5503	*	0425	B
5503	*	0510	B
5503	*	0595	B
5503	*	0680	B
5503	*	0765	B
5503	*	0850	B
5503	*	0935	B
5503	*	1020	B
5503	*	1105	B
5503	*	1190	B
5503	*	1275	B
5503	*	1360	B
5503	*	1445	B
5503	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5503	*	0085	C
5503	*	0170	C
5503	*	0255	C
5503	*	0340	C
5503	*	0425	C
5503	*	0510	C
5503	*	0595	C
5503	*	0680	C
5503	*	0765	C
5503	*	0850	C
5503	*	0935	C
5503	*	1020	C
5503	*	1105	C
5503	*	1190	C
5503	*	1275	C
5503	*	1360	C
5503	*	1445	C
5503	*	1530	C


550 GT Side indent

Tappeto Modulare 550 GT, H=8,7 M=85
Modular Belt Series 550 GT, H=8,7 M=85 / Modulare Mattenkette 550 GT, H=8,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 30 mm

5505	01	0255	A
Series	*Material	Width	Version



- Easier installation
- Quicker maintenance
- 100% interchangeable

25.4mm
PITCH

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Max w. load: 27500 N/m
Weight: 10,1 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white
Top rubber: 50 ShA-Dark grey

PP - Code 02

Polypropylene


Max w. load: 16500 N/m
Weight: 8,4 kg/m²
Temp. range dry: 4÷80 °C
Temp. range wet: 4÷80 °C
Pin material: PP blue
Top rubber: 50 ShA-Pigeon blue

MX - Code 03


Performance PBT

Max w. load: 21500 N/m
Weight: 10,5 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey
Top rubber: 50 ShA-Dark grey


Version A - Standard

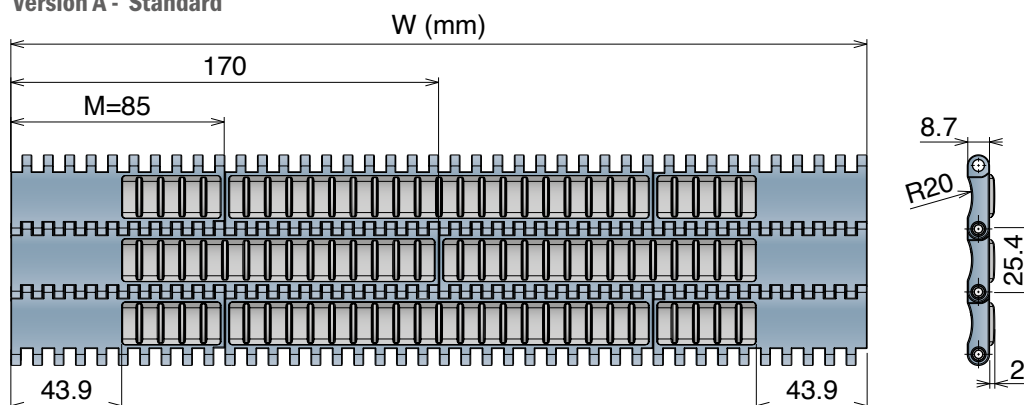

Version B - With 1 Positioner

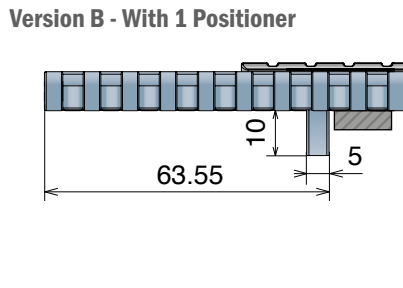

Version C - With 2 Positioner

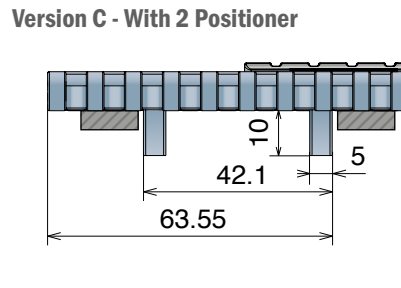

Version A - Standard

Series	Material	Width	Version
5505	*	0255	A
5505	*	0340	A
5505	*	0425	A
5505	*	0510	A
5505	*	0595	A
5505	*	0680	A
5505	*	0765	A
5505	*	0850	A
5505	*	0935	A
5505	*	1020	A
5505	*	1105	A
5505	*	1190	A
5505	*	1275	A
5505	*	1360	A
5505	*	1445	A
5505	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5505	*	0255	B
5505	*	0340	B
5505	*	0425	B
5505	*	0510	B
5505	*	0595	B
5505	*	0680	B
5505	*	0765	B
5505	*	0850	B
5505	*	0935	B
5505	*	1020	B
5505	*	1105	B
5505	*	1190	B
5505	*	1275	B
5505	*	1360	B
5505	*	1445	B
5505	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5505	*	0255	C
5505	*	0340	C
5505	*	0425	C
5505	*	0510	C
5505	*	0595	C
5505	*	0680	C
5505	*	0765	C
5505	*	0850	C
5505	*	0935	C
5505	*	1020	C
5505	*	1105	C
5505	*	1190	C
5505	*	1275	C
5505	*	1360	C
5505	*	1445	C
5505	*	1530	C

NEW 550 FLIGHT TOP Tappeto Modulare 550 with Flight, H=8,7 M=85 Modular Belt Series 550 with Flight, H=8,7 M=85 / Modulare Mattenkette 550 with Flight, H=8,7 M=85

CODE STRUCTURE GUIDE

Backflex radius min.: 30 mm

See following table



pg. 319/320



pg. 651>661

SAMPLE BOX

Art.-Nr. 5503018888A

Material

LFA - Code 01

Low friction Acetal

Max w. load: 30000 N/m
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PP - Code 02

Polypropylene

Max w. load: 18000 N/m
Weight: 8,4 kg/m²
Temp. range dry: 4÷104 °C
Temp. range wet: 4÷104 °C
Pin material: PP blue

LFW - Code 05

Low friction Acetal

Max w. load: 30000 N/m
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PPW - Code 21

Polypropylene

Max w. load: 18000 N/m
Weight: 8,4 kg/m²
Temp. range dry: 4÷80 °C
Temp. range wet: 4÷65 °C
Pin material: PP blu

LFB - Code 23

Low friction Acetal



Max w. load: 30000 N/m
Weight: 8,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white




Pin Sphere®
AUTO LOCK

- Easier installation
- Quicker maintenance
- 100% interchangeable


Version A - Standard

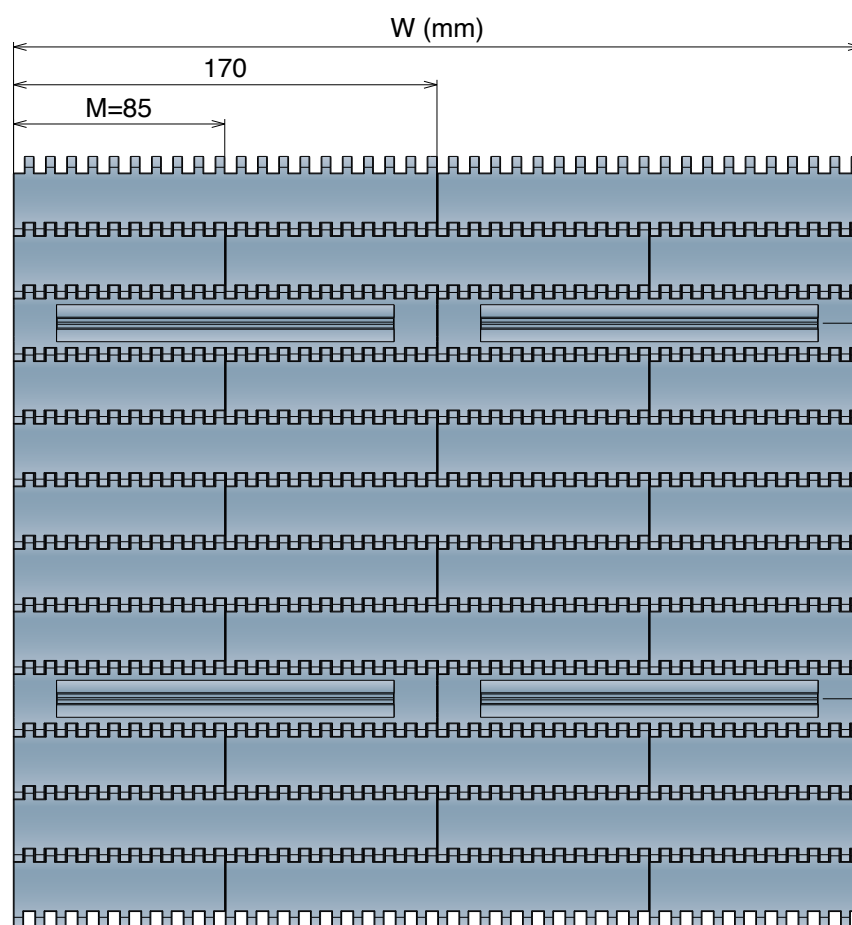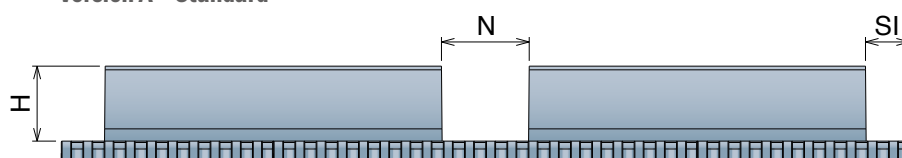

THE PERFECT
SOLUTION
TO CONVEY
EVERY TYPE
OF PRODUCTS
UP AN INCLINE!




Notch utility
RETURN SECTION
with Bar-cap



Side indent utility
RETURN SECTION
with Z-Profile & J-Profile

Request for quotation

Technical drawing

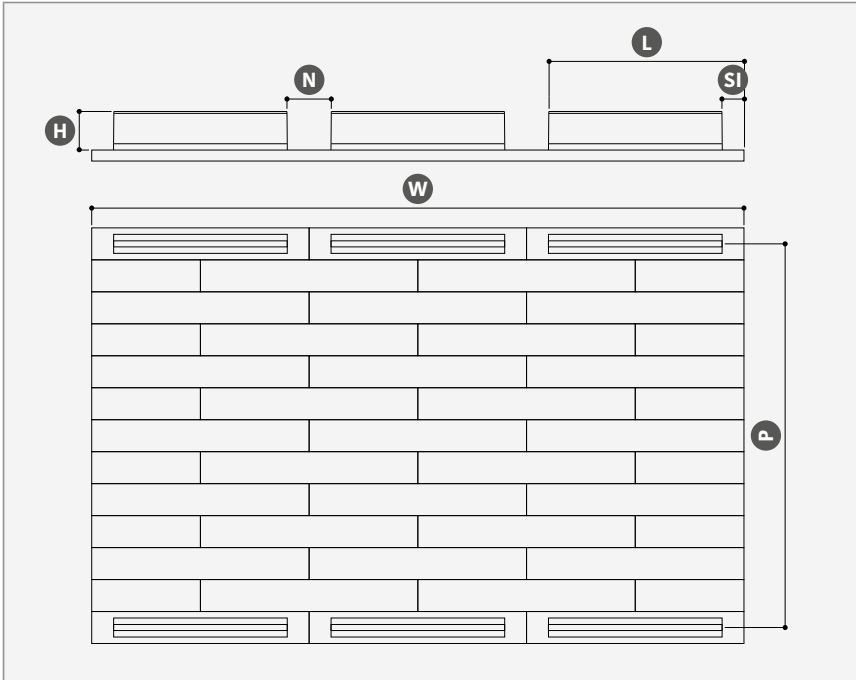

Please fill out the following form or add dimensions into the drawing.

Company

Sales contact

Contact

Date

For different combination, please ask to your sales representative.

Fill out the form and send to your sales contact or to:

info@movexii.com

Metric Size


Technical features

Dimension expressed in millimeter

Belt surface	Flat Top (FT)		Flush Grid (FG)	Grip Top (GT)	
Material & colour	LFA	LFW	LFB	PP	PPW
W - Width	Standard (85 multiple)			Special (17 multiple)	
H - Flight height	Standard	Standard	Standard	Special (Max 76)	
	30	51	76		
P - Pitch	Number of pitches or distance between flights (25,4 mm multiple)				
SI - Side Indent*	No	17	30	50	
Notch*	No	Single	Double	Triple	
	N - Notch width (preferred 34 or 60 mm)			L - Notch distance (2 or more)	

Configuration recommended

Dimensions expressed in millimeter

			
Width ≤ 170	170 > Width ≤ 425	425 > Width ≤ 850	Width > 850

550 PRO FT

Tappeto Modulare 550 PRO FT, H=8,7 K330

Modular Belt Series 550 PRO FT, H=8,7 K330 / Modulare Mattenkette 550 PRO FT, H=8,7 K330

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5227	01	9330	A
Series	*Material	Width	Version

pg. 321/322	pg. 651>661


550 PRO FT & PRO M

SAMPLE BOX

Art.-Nr. 5227018888A



- Easier installation
- Quicker maintenance
- 100% interchangeable

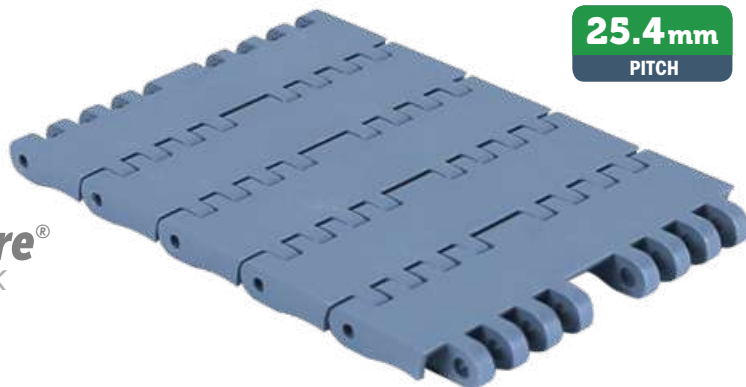

25.4mm
PITCH

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 2300 N
Weight: 8,5 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 1850 N
Weight: 8,2 kg/m²
Temp. range dry: -40+120 °C
Temp. range wet: -40+60 °C
Pin material: POM grey


PFX - Code 30

Extra performance PBT


Max w. load: 1850 N
Weight: 8,2 kg/m²
Temp. range dry: -40+120 °C
Temp. range wet: -40+60 °C
Pin material: POM grey

**THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS**

Version A - Standard

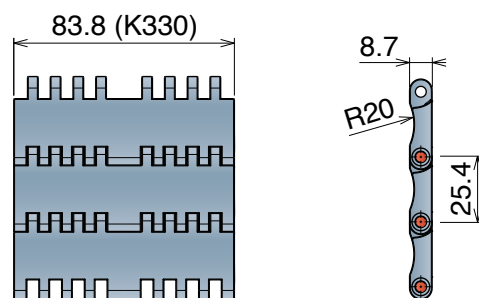

Version C - With 2 Positioner

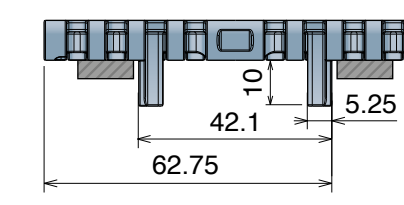

Advantages:

- Optimized product support
- Superior flatness
- Low wear
- Bi-directional

Version A - Standard

Series	Material	Width	Version
5227	*	9330	A

Version C - With 2 Positioners


Series	Material	Width	Version
5227	*	9330	C

550 PRO FT & 550 PRO FT

The perfect combination

- Same height between guide and center sprockets (S Dimension)
- Same speed for curved and straight
- Unique sprocket for curved and straight

Layout with 550 Pro M and 550 PRO FT

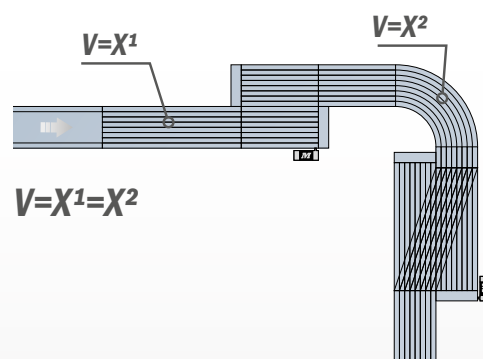

550 PRO M

Tappeto Modulare 550 PRO M, H=8,7 K330

Modular Belt Series 550 PRO M, H=8,7 K330 / Modulare Mattenkette 550 PRO M, H=8,7 K330

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 15 mm

5228	30	9330	C
Series	*Material	Width	Version

 10 feet 3.048 m	 pg. 321/322	 pg. 162	 pg. 651>661
240 links			

MAGNETIC SYSTEM


550 PRO FT & PRO M

SAMPLE BOX

Art.-Nr. 5227018888A

Pin Sphere®
AUTOLOCK

- Easier installation • Quicker maintenance
- 100% interchangeable

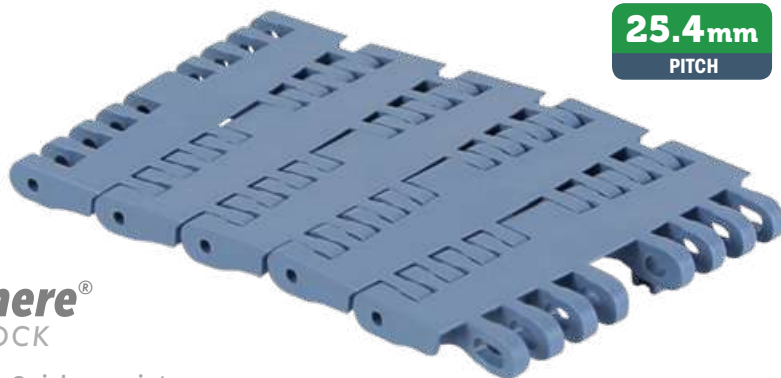25.4mm
PITCH

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 2500 N
 Weight: 8,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: Ferritic
 Stainless Steel

MX - Code 03

Performance PBT

Max w. load: 2000 N
 Weight: 8,0 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: Ferritic
 Stainless Steel



PFX - Code 30

Extra performance PBT

Max w. load: 2000 N
 Weight: 8,0 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: Ferritic
 Stainless Steel

THE BEST CHOICE FOR
 DRY RUNNING APPLICATIONS

Version C - With 2 Positioner

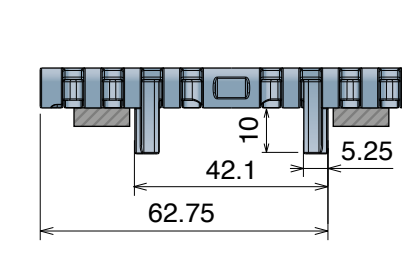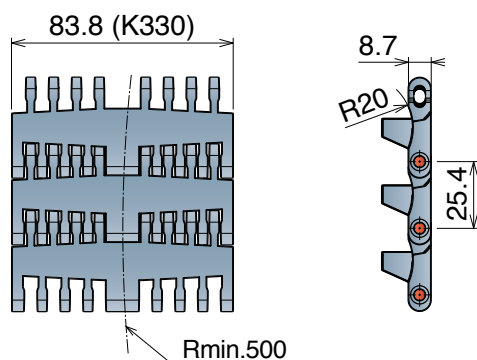

Advantages:

- Optimized product support
- Superior flatness
- Low wear
- Bi-directional

Version C - With 2 Positioners


Series	Material	Width	Version
5228	*	9330	C

550 PRO FT & 550 PRO FT

The perfect combination

- Same height between guide and center sprockets (S Dimension)
- Same speed for curved and straight
- Unique sprocket for curved and straight

Layout with 550 Pro M and 550 PRO FT

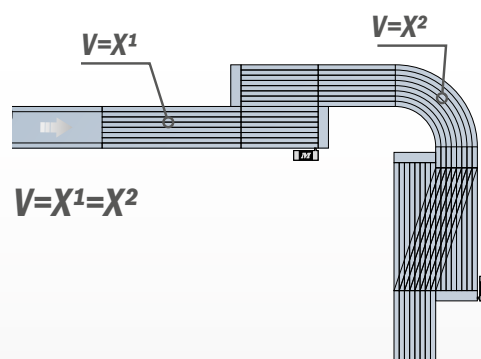

551

Pitch 25,4 mm
H= 12,7 mm



551 FT
551 FTT
551 GT
551 GT *Side indent*
551 LBP
551 PRO LBP

551 FT

Tappeto Modulare 551 FT, H=12,7 M=85

Modular Belt Series 551 FT, H=12,7 M=85 / Modulare Mattenkette 551 FT, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5231	01	0085	A
Series	*Material	Width	Version

25.4mm
PITCH

* Material

LFA - Code 01
Low friction Acetal

Easy Delivery

Max w. load: 41500 N/m
Weight: 12,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PP - Code 02
Polypropylene

Max w. load: 27000 N/m
Weight: 10,0 kg/m²
Temp. range dry: 4÷104 °C
Temp. range wet: 4÷104 °C
Pin material: PP blue

MX - Code 03
Performance PBT

Max w. load: 33500 N/m
Weight: 12,0 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

DKM - Code 16
Aramid Reinforced Acetal

Max w. load: 41500 N/m
Weight: 12,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MWX - Code 17
Polyamide Composite

Max w. load: 41500 N/m
Weight: 13,0 kg/m²
Temp. range dry: -40÷104 °C
Temp. range wet: NR
Pin material: PBT white

MPX - Code 25
Lubricated Acetal

Max w. load: 41500 N/m
Weight: 12,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

PFX - Code 30
Extra performance PBT

Max w. load: 33500 N/m
Weight: 12,0 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey


THE BEST CHOICE FOR
DRY RUNNING APPLICATIONS

SAMPLE BOX


Art.-Nr. 5231018888A




Version A - Standard

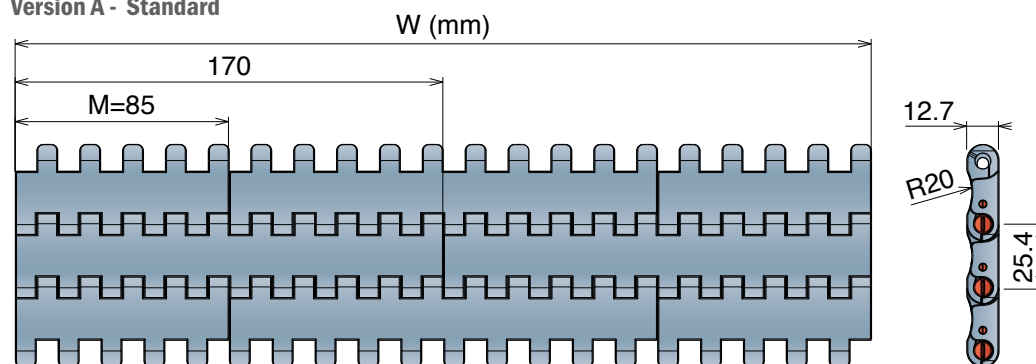

Version B - With 1 Positioner

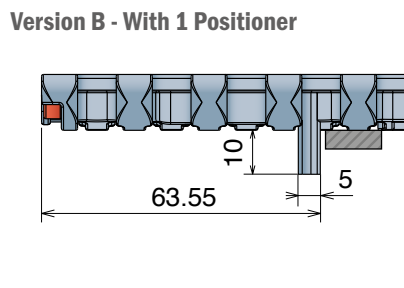

Version C - With 2 Positioner

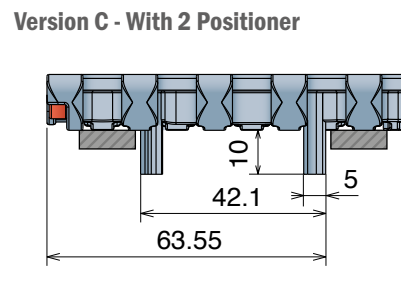

Version A - Standard

Series	Material	Width	Version
5231	*	0085	A
5231	*	0170	A
5231	*	0255	A
5231	*	0340	A
5231	*	0425	A
5231	*	0510	A
5231	*	0595	A
5231	*	0680	A
5231	*	0765	A
5231	*	0850	A
5231	*	0935	A
5231	*	1020	A
5231	*	1105	A
5231	*	1190	A
5231	*	1275	A
5231	*	1360	A
5231	*	1445	A
5231	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5231	*	0085	B
5231	*	0170	B
5231	*	0255	B
5231	*	0340	B
5231	*	0425	B
5231	*	0510	B
5231	*	0595	B
5231	*	0680	B
5231	*	0765	B
5231	*	0850	B
5231	*	0935	B
5231	*	1020	B
5231	*	1105	B
5231	*	1190	B
5231	*	1275	B
5231	*	1360	B
5231	*	1445	B
5231	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5231	*	0085	C
5231	*	0170	C
5231	*	0255	C
5231	*	0340	C
5231	*	0425	C
5231	*	0510	C
5231	*	0595	C
5231	*	0680	C
5231	*	0765	C
5231	*	0850	C
5231	*	0935	C
5231	*	1020	C
5231	*	1105	C
5231	*	1190	C
5231	*	1275	C
5231	*	1360	C
5231	*	1445	C
5231	*	1530	C

Metric Size

551 FTT



Tappeto Modulare 551 FTT, H=12,7 M=85

Modular Belt Series 551 FTT, H=12,7 M=85 / Modulare Mattenkette 551 FTT, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5236	01	0085	C
Series	*Material	Width	Version

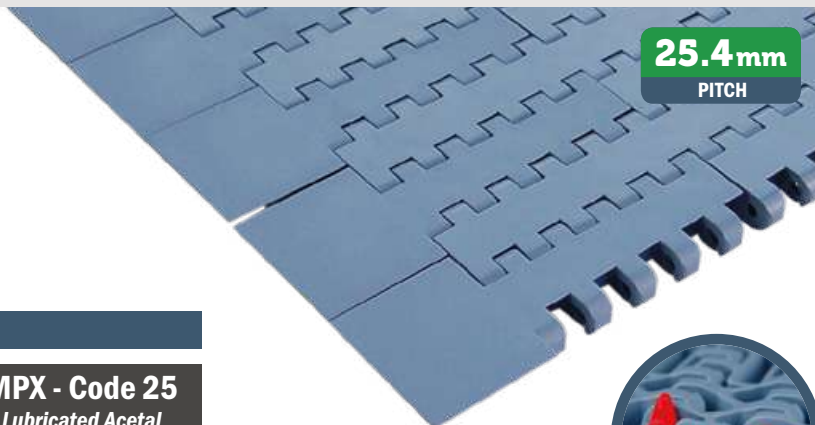



25.4mm
PITCH


*Material

LFA - Code 01 Low friction Acetal	MX - Code 03 Performance PBT	MPX - Code 25 Lubricated Acetal
--------------------------------------	---------------------------------	------------------------------------


Max w. load: 41500 N/m	Max w. load: 33500 N/m	Max w. load: 41500 N/m
Weight: 12,5 kg/m ²	Weight: 12,0 kg/m ²	Weight: 12,5 kg/m ²
Temp. range dry: -40÷80 °C	Temp. range dry: -40÷120 °C	Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C	Temp. range wet: -40÷60 °C	Temp. range wet: -40÷65 °C
Pin material: PBT white	Pin material: POM grey	Pin material: PBT white

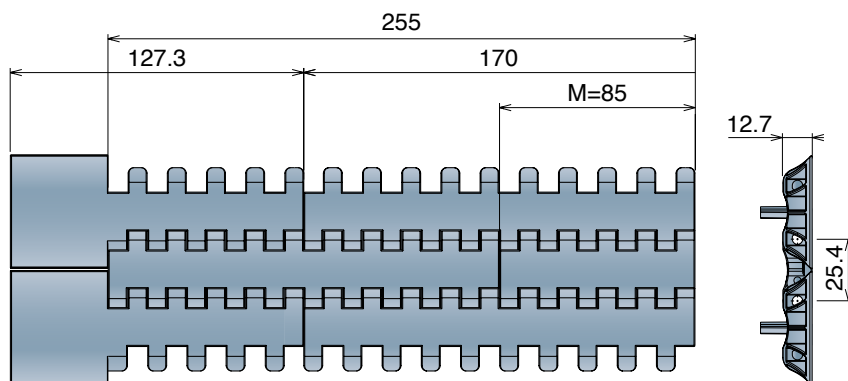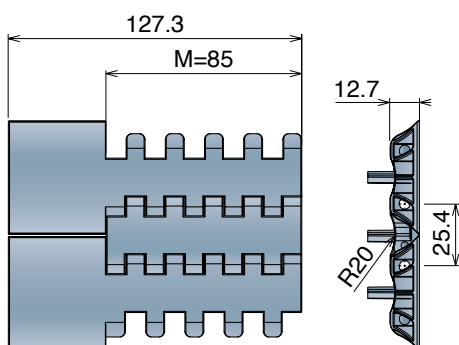

Version C




Version CN - Near

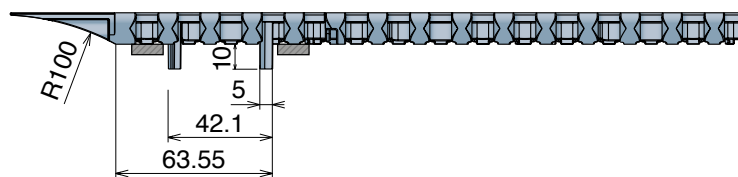

Version C

Series	Material	Width	Version
5236	*	0085	C

Version C0 - Opposite

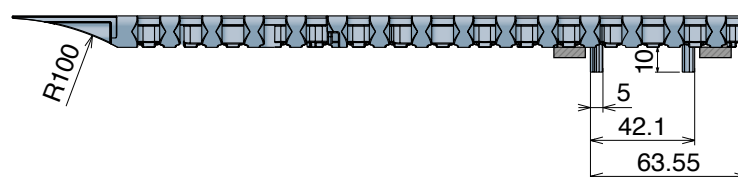

Max working load (N)

Width	85
LFA	3500
MX	2800
MPX	3500

Version CN - Near

Series	Material	Width	Version
5236	*	0170	CN
5236	*	0255	CN

Version C0 - Opposite

Series	Material	Width	Version
5236	*	0170	C0
5236	*	0255	C0

551 GT

Tappeto Modulare 551 GT, H=12,7 M=85

Modular Belt Series 551 GT, H=12,7 M=85 / Modulare Mattenkette 551 GT, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 50 mm

5233	01	0085	A
Series	*Material	Width	Version

pg. 323-324	pg. 651>661

SAMPLE BOX

Art.-Nr. 5233018888A

25.4mm
PITCH

Metric Size

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 41500 N/m
 Weight: 13,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white
 Top rubber: 50 ShA-Dark grey

PP - Code 02

Polypropylene


Max w. load: 27000 N/m
 Weight: 11,0 kg/m²
 Temp. range dry: 4÷80 °C
 Temp. range wet: 4÷80 °C
 Pin material: PP blue
 Top rubber: 50 ShA-Pigeon blue

MX - Code 03


Performance PBT

Max w. load: 33500 N/m
 Weight: 12,7 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey
 Top rubber: 50 ShA-Dark grey


Version A - Standard

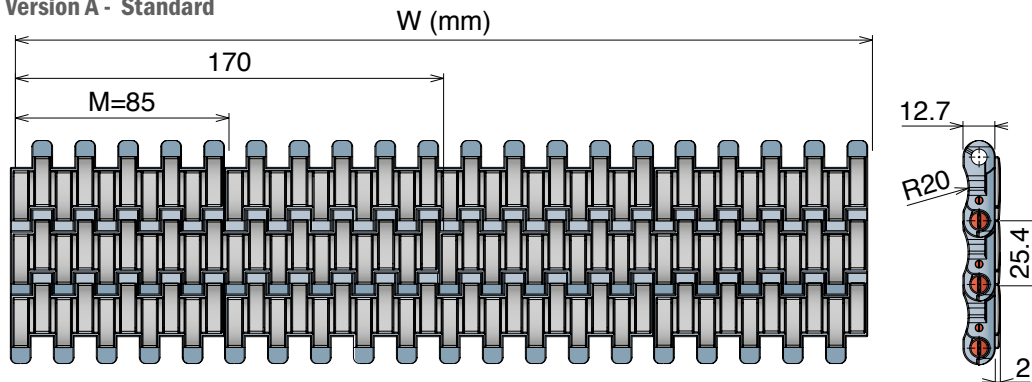

Version B - With 1 Positioner

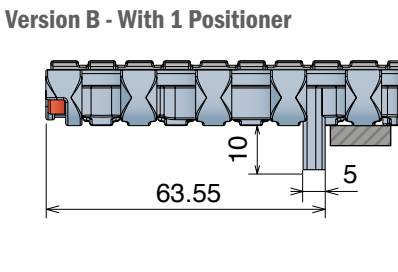

Version C - With 2 Positioner

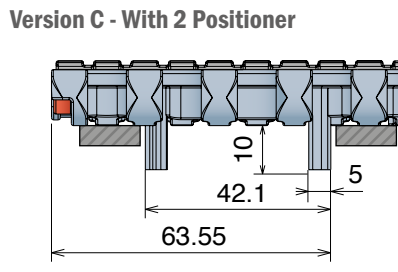

Version A - Standard

Series	Material	Width	Version
5233	*	0085	A
5233	*	0170	A
5233	*	0255	A
5233	*	0340	A
5233	*	0425	A
5233	*	0510	A
5233	*	0595	A
5233	*	0680	A
5233	*	0765	A
5233	*	0850	A
5233	*	0935	A
5233	*	1020	A
5233	*	1105	A
5233	*	1190	A
5233	*	1275	A
5233	*	1360	A
5233	*	1445	A
5233	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5233	*	0085	B
5233	*	0170	B
5233	*	0255	B
5233	*	0340	B
5233	*	0425	B
5233	*	0510	B
5233	*	0595	B
5233	*	0680	B
5233	*	0765	B
5233	*	0850	B
5233	*	0935	B
5233	*	1020	B
5233	*	1105	B
5233	*	1190	B
5233	*	1275	B
5233	*	1360	B
5233	*	1445	B
5233	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5233	*	0085	C
5233	*	0170	C
5233	*	0255	C
5233	*	0340	C
5233	*	0425	C
5233	*	0510	C
5233	*	0595	C
5233	*	0680	C
5233	*	0765	C
5233	*	0850	C
5233	*	0935	C
5233	*	1020	C
5233	*	1105	C
5233	*	1190	C
5233	*	1275	C
5233	*	1360	C
5233	*	1445	C
5233	*	1530	C

551 GT Side indent

Tappeti modulari / Modular belts / Mattenketten

Belts wider than standard are available with 85 mm increments

551 GT Side indent

Tappeto Modulare 551 GT, H=12,7 M=85

Modular Belt Series 551 GT, H=12,7 M=85 / Modulare Mattenkette 551 GT, H=12,7 M=85


CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 50 mm

5235	01	0255	A
Series	*Material	Width	Version

pg. 323-324	pg. 651>661

25.4mm
PITCH

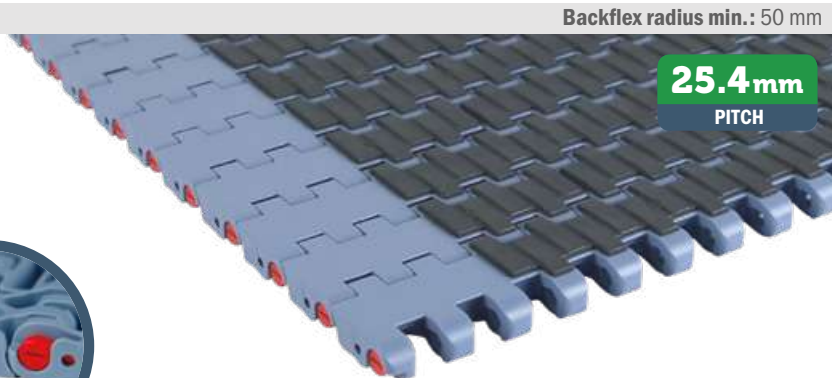

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 41500 N/m
Weight: 13,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white
Top rubber: 50 ShA-Dark grey

PP - Code 02

Polpropylene


Max w. load: 27000 N/m
Weight: 11,0 kg/m²
Temp. range dry: 4÷80 °C
Temp. range wet: 4÷80 °C
Pin material: PP blue
Top rubber: 50 ShA-Pigeon blue

MX - Code 03


Performance PBT

Max w. load: 33500 N/m
Weight: 12,7 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey
Top rubber: 50 ShA-Dark grey


Version A - Standard

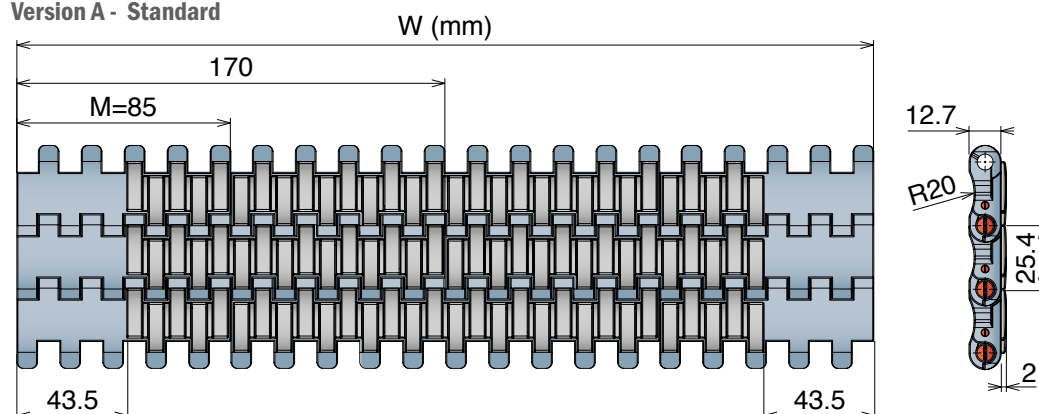

Version B - With 1 Positioner

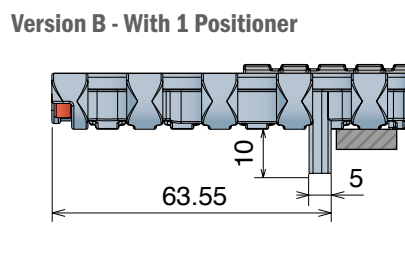

Version C - With 2 Positioner

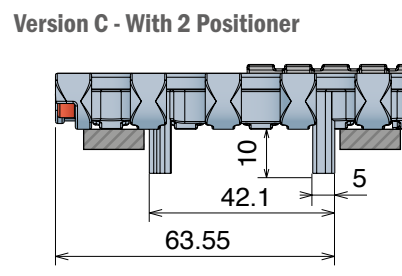

Version A - Standard

Series	Material	Width	Version
5235	*	0255	A
5235	*	0340	A
5235	*	0425	A
5235	*	0510	A
5235	*	0595	A
5235	*	0680	A
5235	*	0765	A
5235	*	0850	A
5235	*	0935	A
5235	*	1020	A
5235	*	1105	A
5235	*	1190	A
5235	*	1275	A
5235	*	1360	A
5235	*	1445	A
5235	*	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5235	*	0255	B
5235	*	0340	B
5235	*	0425	B
5235	*	0510	B
5235	*	0595	B
5235	*	0680	B
5235	*	0765	B
5235	*	0850	B
5235	*	0935	B
5235	*	1020	B
5235	*	1105	B
5235	*	1190	B
5235	*	1275	B
5235	*	1360	B
5235	*	1445	B
5235	*	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5235	*	0255	C
5235	*	0340	C
5235	*	0425	C
5235	*	0510	C
5235	*	0595	C
5235	*	0680	C
5235	*	0765	C
5235	*	0850	C
5235	*	0935	C
5235	*	1020	C
5235	*	1105	C
5235	*	1190	C
5235	*	1275	C
5235	*	1360	C
5235	*	1445	C
5235	*	1530	C

Movex

551 LBP

Tappeto Modulare 551 LBP, H=12,7 M=85

Modular Belt Series 551 LBP, H=12,7 M=85 / Modulare Mattenkette 551 LBP, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 120 mm

5234	01	0085	A
Series	*Material	Width	Version

pg. 323-324	pg. 651>661

SAMPLE BOX

Art.-Nr. 5234018888A

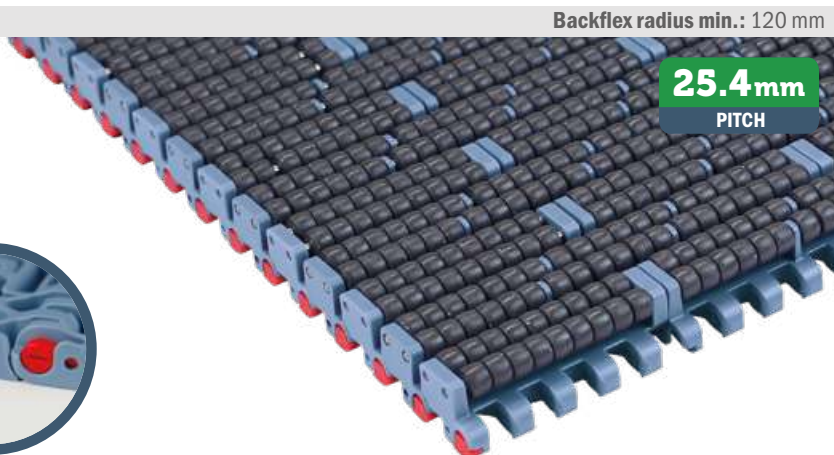25.4mm
PITCH

Metric Size


Material

LFA - Code 01


Low friction Acetal

Max w. load: 41500 N/m
 Weight: 26,9 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white


Version A - Standard

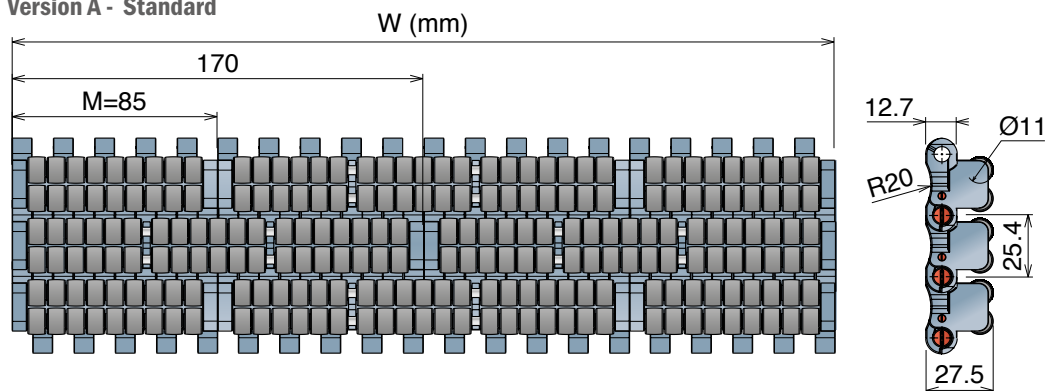

Version B - With 1 Positioner

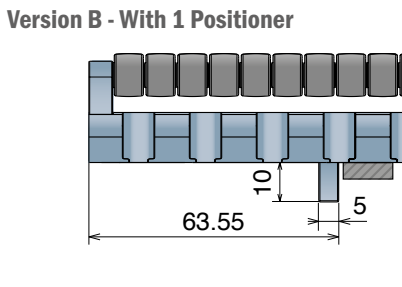

Version C - With 2 Positioner

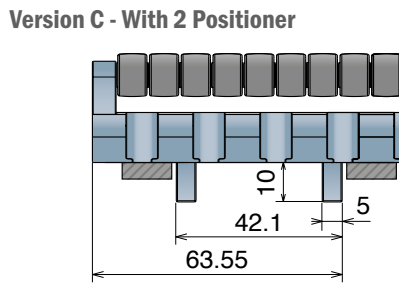

Version A - Standard

Series	Material	Width	Version
5234	01	0085	A
5234	01	0170	A
5234	01	0255	A
5234	01	0340	A
5234	01	0425	A
5234	01	0510	A
5234	01	0595	A
5234	01	0680	A
5234	01	0765	A
5234	01	0850	A
5234	01	0935	A
5234	01	1020	A
5234	01	1105	A
5234	01	1190	A
5234	01	1275	A
5234	01	1360	A
5234	01	1445	A
5234	01	1530	A

Version B - With 1 Positioner

Series	Material	Width	Version
5234	01	0085	B
5234	01	0170	B
5234	01	0255	B
5234	01	0340	B
5234	01	0425	B
5234	01	0510	B
5234	01	0595	B
5234	01	0680	B
5234	01	0765	B
5234	01	0850	B
5234	01	0935	B
5234	01	1020	B
5234	01	1105	B
5234	01	1190	B
5234	01	1275	B
5234	01	1360	B
5234	01	1445	B
5234	01	1530	B

Version C - With 2 Positioners

Series	Material	Width	Version
5234	01	0085	C
5234	01	0170	C
5234	01	0255	C
5234	01	0340	C
5234	01	0425	C
5234	01	0510	C
5234	01	0595	C
5234	01	0680	C
5234	01	0765	C
5234	01	0850	C
5234	01	0935	C
5234	01	1020	C
5234	01	1105	C
5234	01	1190	C
5234	01	1275	C
5234	01	1360	C
5234	01	1445	C
5234	01	1530	C

551 PRO LBP

Tappeto Modulare 551 PRO LBP, H=12,7 M=85

Modular Belt Series 551 PRO LBP, H=12,7 M=85 / Modulare Mattenkette 551 PRO LBP, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 100 mm

5240	01	0085	A
Series	*Material	Width	Version

pg. 323-324	pg. 651>661

SAMPLE BOX

Art.-Nr. **5240018888A**

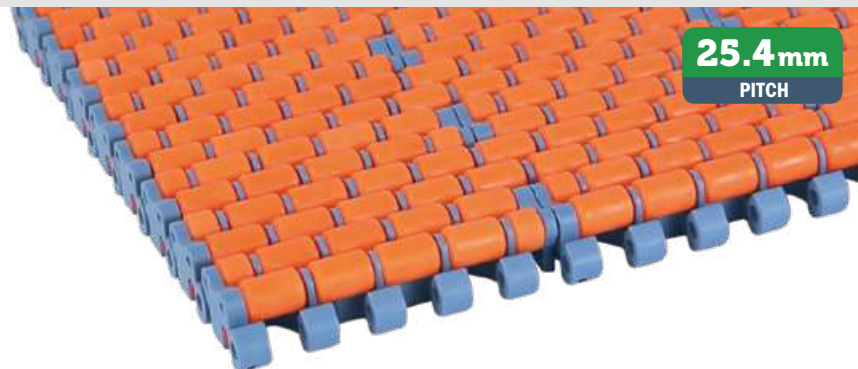

25.4mm
PITCH

Material

LFA - Code 01

Low friction Acetal


Easy Delivery

Max w. load: 41500 N/m
Weight SS pin: 13,8 kg/m²
Weight Plastic pin: 11,0 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white


PFX Roller

**THE BEST CHOICE TO REACH
THE LOWEST FRICTION**


Version A - Standard

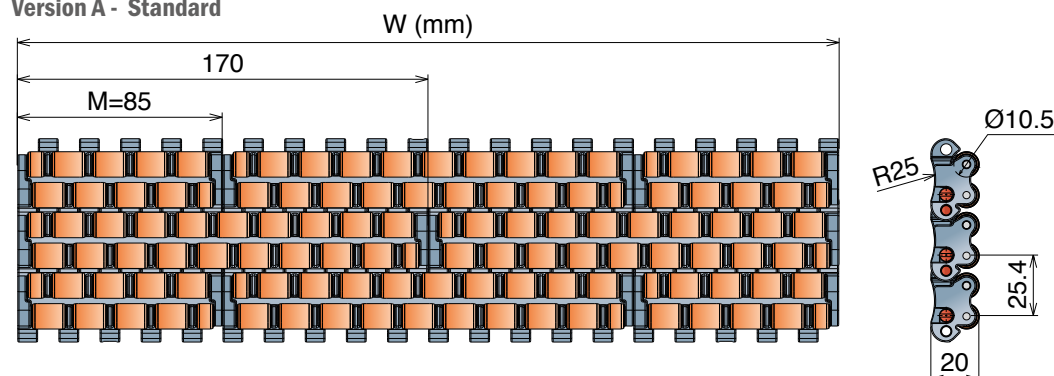

Version B - With 1 Positioner

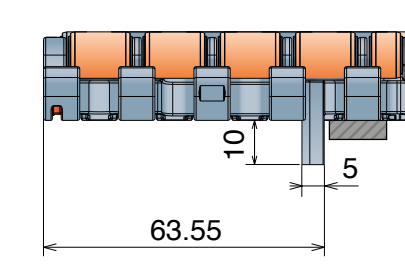

Version C - With 2 Positioner

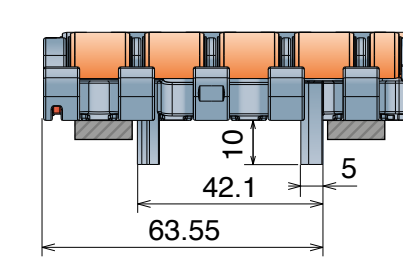

Stainless steel Pin



Plastic Pin

Series	Material	Width	Version
5239	01	0085	*
5239	01	0170	*
5239	01	0255	*
5239	01	0340	*
5239	01	0425	*
5239	01	0510	*
5239	01	0595	*
5239	01	0680	*
5239	01	0765	*
5239	01	0850	*
5239	01	0935	*
5239	01	1020	*
5239	01	1105	*
5239	01	1190	*
5239	01	1275	*
5239	01	1360	*
5239	01	1445	*
5239	01	1530	*

Series	Material	Width	Version
5240	01	0085	*
5240	01	0170	*
5240	01	0255	*
5240	01	0340	*
5240	01	0425	*
5240	01	0510	*
5240	01	0595	*
5240	01	0680	*
5240	01	0765	*
5240	01	0850	*
5240	01	0935	*
5240	01	1020	*
5240	01	1105	*
5240	01	1190	*
5240	01	1275	*
5240	01	1360	*
5240	01	1445	*
5240	01	1530	*

*Version

Standard Add **A**

With 1 Positioner Add **B**

With 2 Positioners Add **C**

552

Pitch 25,4 mm
H= 12,7 mm



Imperial Size

552 FT

552 FT *One track Belt*

552 FTT

552 PT

552 PT *One track Belt*

552 GT

552 GT *Side indent*

552 FT

Tappeto Modulare 552 FT, H=12,7 M=3"

Modular Belt Series 552 FT, H=12,7 M=3" / Modulare Mattenkette 552 FT, H=12,7 M=3"

CODE STRUCTURE GUIDE (Example)



Backflex radius min.: 25 mm

5341	01	0009	A
Series	*Material	Width	Version

pg. 325	pg. 651 > 661

SAMPLE BOX

Art.-Nr. 5341018888A

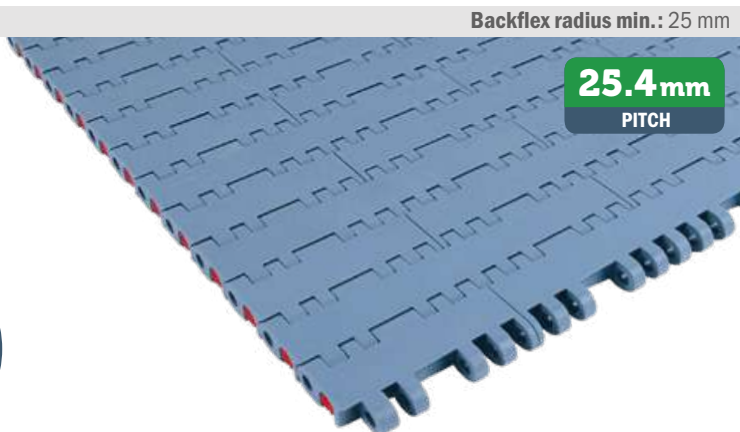

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: 41500 N/m
 Weight: 13,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 33500 N/m
 Weight: 13,0 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

MWX - Code 17

Polyamide Composite


Max w. load: 41500 N/m
 Weight: 14,0 kg/m²
 Temp. range dry: -40÷104 °C
 Temp. range wet: NR
 Pin material: PBT white

MPX - Code 25

Lubricated Acetal

Max w. load: 41500 N/m
 Weight: 13,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

Version A - Standard

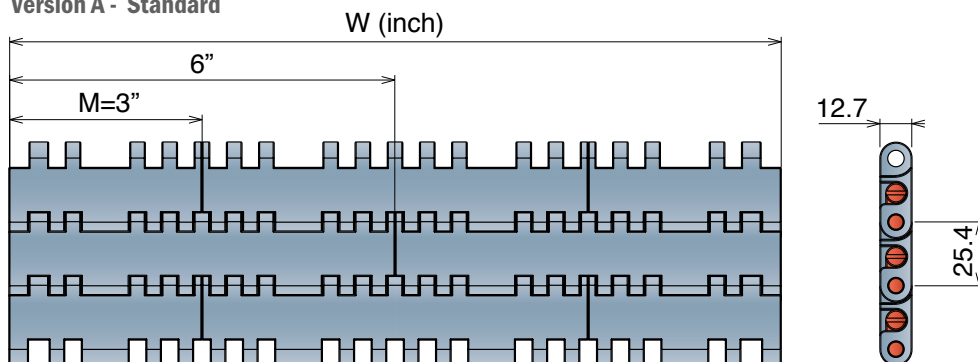

Version A - Standard

Series	Material	Width	Version
5341	*	0009	A
5341	*	0012	A
5341	*	0015	A
5341	*	0018	A
5341	*	0021	A
5341	*	0024	A
5341	*	0027	A
5341	*	0030	A
5341	*	0033	A
5341	*	0036	A
5341	*	0039	A
5341	*	0042	A
5341	*	0045	A
5341	*	0048	A
5341	*	0051	A
5341	*	0054	A



552 FT One track Belt

Tappeto Modulare 552 FT, H=12,7
Modular Belt Series 552 FT, H=12,7 / Modulare Mattenkette 552 FT, H=12,7

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5341	01	0003	A
Series	*Material	Width	Version

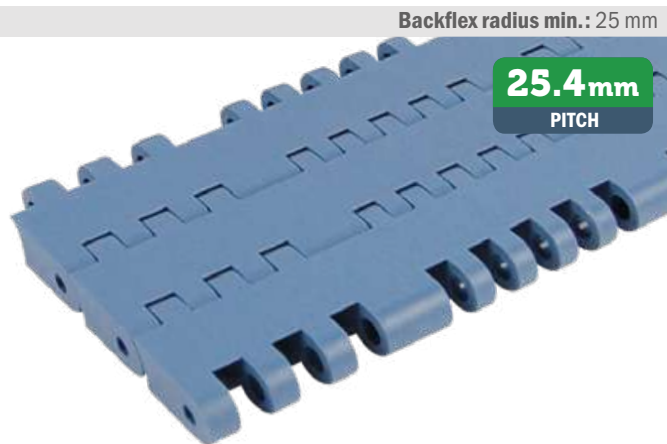

*Material

LFA - Code 01

Low friction Acetal

Easy Delivery

Max w. load: See below
Weight: 13,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: See below
Weight: 13,0 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

MWX - Code 17

Polyamide Composite

Max w. load: See below
Weight: 14,0 kg/m²
Temp. range dry: -40÷104 °C
Temp. range wet: NR
Pin material: PBT white

MPX - Code 25

Lubricated Acetal



Max w. load: See below
Weight: 13,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

Max working load (N)


Width	K300	K325	K450
LFA	3200	3400	4800
MX	2500	2800	3800
MWX	3200	3400	4800
MPX	3200	3400	4800

Width	K600	K750
LFA	6200	7900
MX	5100	6400
MWX	6200	7900
MPX	6200	7900

Version A - Standard



Version C - With 2 Positioner



K300 - One track belt



Series	Material	Width	Version
5341	*	0003	A
5341	*	0003	C

K325 - One track belt



Series	Material	Width	Version
5341	*	9325	A
5341	*	9325	C

K450 - One track belt



Series	Material	Width	Version
5341	*	9450	A
5341	*	9450	C

K600 - One track belt



Series	Material	Width	Version
5341	*	0006	A
5341	*	0006	C

K750 - One track belt



Series	Material	Width	Version
5341	*	9750	A
5341	*	9750	C

552 FTT

Tappeto Modulare 552 FTT, H=12,7


Modular Belt Series 552 FTT, H=12,7 / Modulare Mattenkette 552 FTT, H=12,7

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5346	01	9450	C-R
Series	*Material	Width	Version

pg. 325	pg. 651>661



25.4mm
PITCH

*Material

LFA - Code 01

Low friction Acetal

Max w. load: See below
Weight: 13,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: See below
Weight: 13,0 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey

MWX - Code 17

Polyamide Composite

Max w. load: See below
Weight: 14,0 kg/m²
Temp. range dry: -40÷104 °C
Temp. range wet: NR
Pin material: PBT white

MPX - Code 25



Lubricated Acetal

Max w. load: See below
Weight: 13,5 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

Max working load (N)


Width	450	750
LFA	4800	7900
MX	3800	6400
MWX	4800	7900
MPX	4800	7900

552 FTT - DX Version

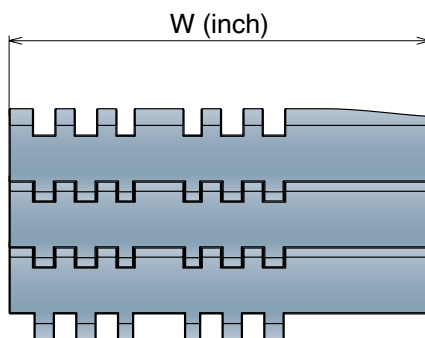



K450 / K750

Series	Material	Width	Version	Total width
5346	*	9450	C - R	160.3
5346	*	9750	C - R	237.4




552 FTT - SX Version

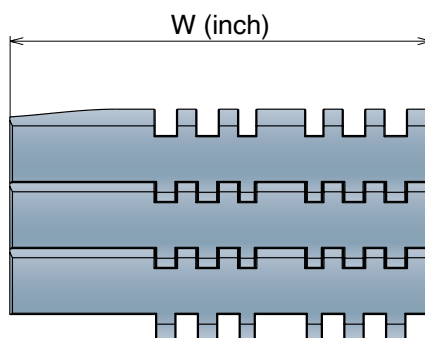

K450 / K750

Series	Material	Width	Version	Total width
5346	*	9450	C - L	160.3
5346	*	9750	C - L	237.4



552 PT Open Surface 8% Tappeto Modulare 552 PT, H=12,7 M=3"

Modular Belt Series 552 PT, H=12,7 M=3" / Modulare Mattenkette 552 PT, H=12,7 M=3"

CODE STRUCTURE GUIDE (Example)



Backflex radius min.: 25 mm

5342	01	0009	A
Series	*Material	Width	Version

pg. 325	pg. 651>661

SAMPLE BOX

Art.-Nr. 5342018888A

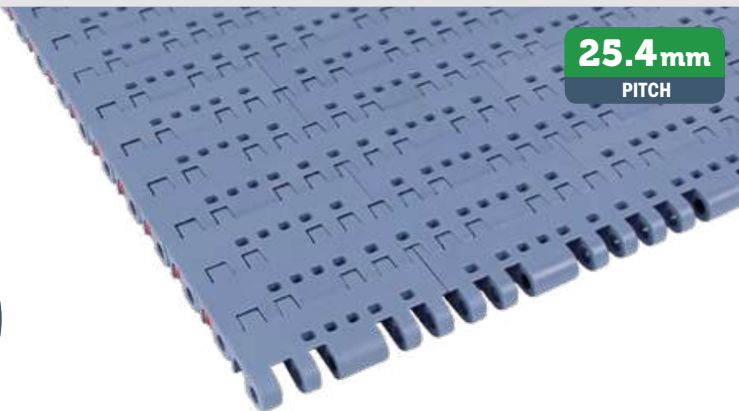25.4mm
PITCH

Imperial Size

*Material

LFA - Code 01

Low friction Acetal

Max w. load: 41500 N/m
 Weight: 13,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

MX - Code 03

Performance PBT

Max w. load: 33500 N/m
 Weight: 12,7 kg/m²
 Temp. range dry: -40÷120 °C
 Temp. range wet: -40÷60 °C
 Pin material: POM grey

MWX - Code 17

Polyamide Composite


Max w. load: 41500 N/m
 Weight: 13,7 kg/m²
 Temp. range dry: -40÷104 °C
 Temp. range wet: NR
 Pin material: PBT white

MPX - Code 25

Lubricated Acetal

Max w. load: 41500 N/m
 Weight: 13,2 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white

Version A - Standard

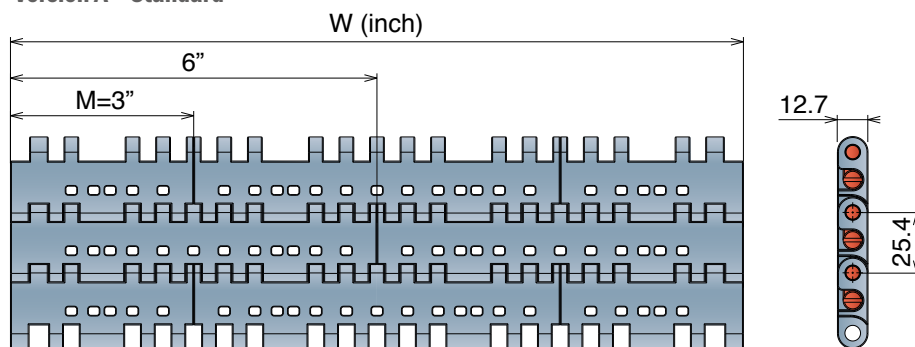

Version A - Standard

Series	Material	Width	Version
5342	*	0009	A
5342	*	0012	A
5342	*	0015	A
5342	*	0018	A
5342	*	0021	A
5342	*	0024	A
5342	*	0027	A
5342	*	0030	A
5342	*	0033	A
5342	*	0036	A
5342	*	0039	A
5342	*	0042	A
5342	*	0045	A
5342	*	0048	A
5342	*	0051	A
5342	*	0054	A

552 PT One track Belt

Tappeti modulari / Modular belts / Mattenketten

Imperial Size

552 PT One track Belt Open Surface 8% Tappeto Modulare 552 PT, H=12,7 M=3" Modular Belt Series 552 PT, H=12,7 M=3" / Modulare Mattenkette 552 PT, H=12,7 M=3"



CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5342	01	0003	A
Series	*Material	Width	Version

pg. 325	pg. 651>661

25.4mm
PITCH

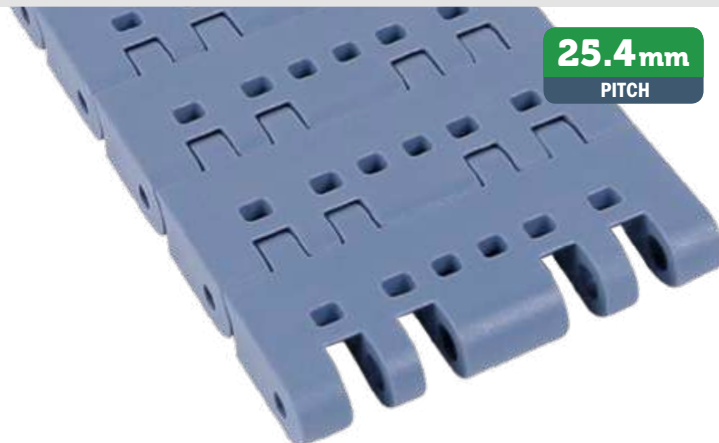

*Material

LFA - Code 01 *Low friction Acetal*

Max w. load: See below
Weight: 13,2 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

MX - Code 03 *Performance PBT*

Max w. load: See below
Weight: 12,7 kg/m²
Temp. range dry: -40÷120 °C
Temp. range wet: -40÷60 °C
Pin material: POM grey


MWX - Code 17 *Polyamide Composite*

Max w. load: See below
Weight: 13,7 kg/m²
Temp. range dry: -40÷104 °C
Temp. range wet: NR
Pin material: PBT white


MPX - Code 25 *Lubricated Acetal*

Max w. load: See below
Weight: 13,2 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

Version A - Standard

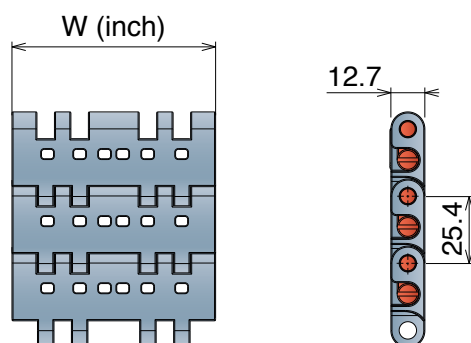

Version C - With 2 Positioner



Version A - Standard

Series	Material	Width	Version
5342	*	0003	A
5342	*	0006	A

Version C - With 2 Positioners

Series	Material	Width	Version
5342	*	0003	C
5342	*	0006	C

Max working load (N)

Width	300	600
LFA	3200	6300
MX	2500	5100
MWX	3200	6300
MPX	3200	6300

552 GT



Tappeto Modulare 552 GT, H=12,7 M=3"

Modular Belt Series 552 GT, H=12,7 M=3" / Modulare Mattenkette 552 GT, H=12,7 M=3"

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5343	01	0009	A
Series	*Material	Width	Version

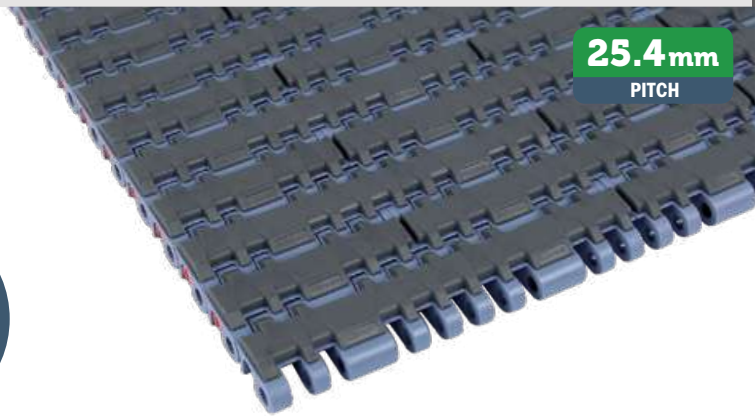

Imperial Size

*Material

LFA - Code 01

Low friction Acetal


Max w. load: 41500 N/m
 Weight: 15,5 kg/m²
 Temp. range dry: -40÷80 °C
 Temp. range wet: -40÷65 °C
 Pin material: PBT white
 Top rubber: 50 ShA-Dark grey

PP - Code 02

Polypropylene

Max w. load: 27000 N/m
 Weight: 13,5 kg/m²
 Temp. range dry: 4÷80 °C
 Temp. range wet: 4÷80 °C
 Pin material: PP blue
 Top rubber: 50 ShA-Black

Version A - Standard

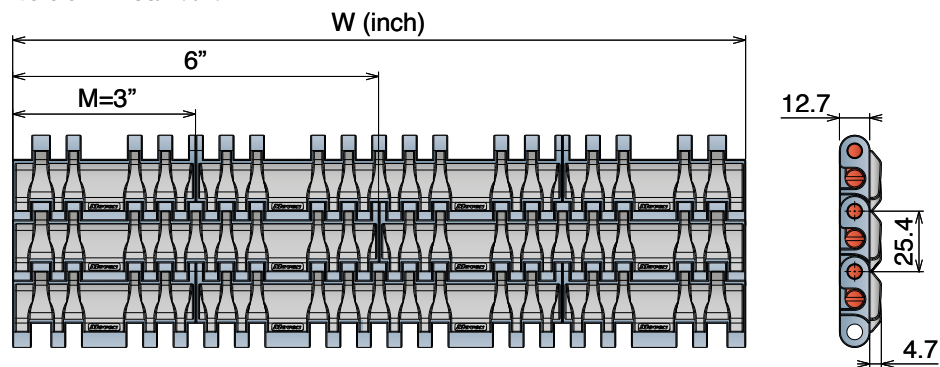

Version A - Standard

Series	Material	Width	Version
5343	*	0009	A
5343	*	0012	A
5343	*	0015	A
5343	*	0018	A
5343	*	0021	A
5343	*	0024	A
5343	*	0027	A
5343	*	0030	A
5343	*	0033	A
5343	*	0036	A
5343	*	0039	A
5343	*	0042	A
5343	*	0045	A
5343	*	0048	A
5343	*	0051	A
5343	*	0054	A



Rubber Thickness 4.7 mm



552 GT *Side indent* Tappeto Modulare 552 GT SI, H=12,7 M=3" / Modular Belt Series 552 GT SI, H=12,7 M=3" / Modulare Mattenkette 552 GT SI, H=12,7 M=3"

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5345	01	0009	A
Series	*Material	Width	Version

	
pg. 325	pg. 651>661

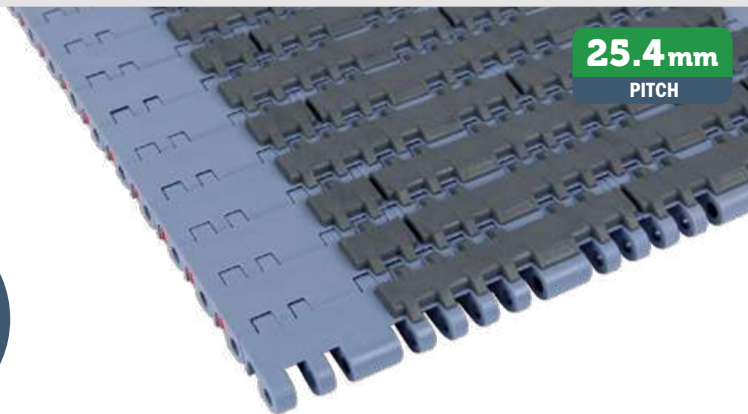

25.4mm
PITCH

*Material


LFA - Code 01 Low friction Acetal

Max w. load: 41500 N/m
Weight: 15,5 kg/m²
Temp. range dry: -40+80 °C
Temp. range wet: -40+65 °C
Pin material: PBT white
Top rubber: 50 ShA-Dark grey

PP - Code 02 Polypropylene

Max w. load: 27000 N/m
Weight: 13,5 kg/m²
Temp. range dry: 4+80 °C
Temp. range wet: 4+80 °C
Pin material: PP blue
Top rubber: 50 ShA-Black

Version A - Standard

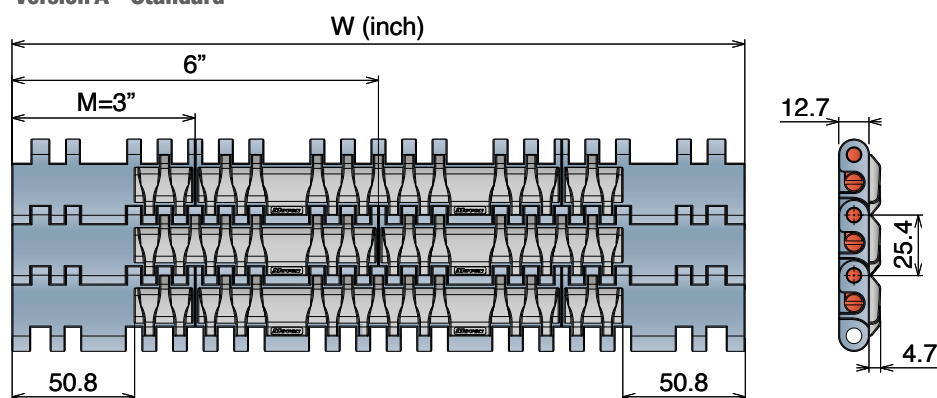

Version A - Standard


Series	Material	Width	Version
5345	*	0009	A
5345	*	0012	A
5345	*	0015	A
5345	*	0018	A
5345	*	0021	A
5345	*	0024	A
5345	*	0027	A
5345	*	0030	A
5345	*	0033	A
5345	*	0036	A
5345	*	0039	A
5345	*	0042	A
5345	*	0045	A
5345	*	0048	A
5345	*	0051	A
5345	*	0054	A



Rubber Thickness 4.7 mm

553

Pitch 25,4 mm
H= 8,7 mm

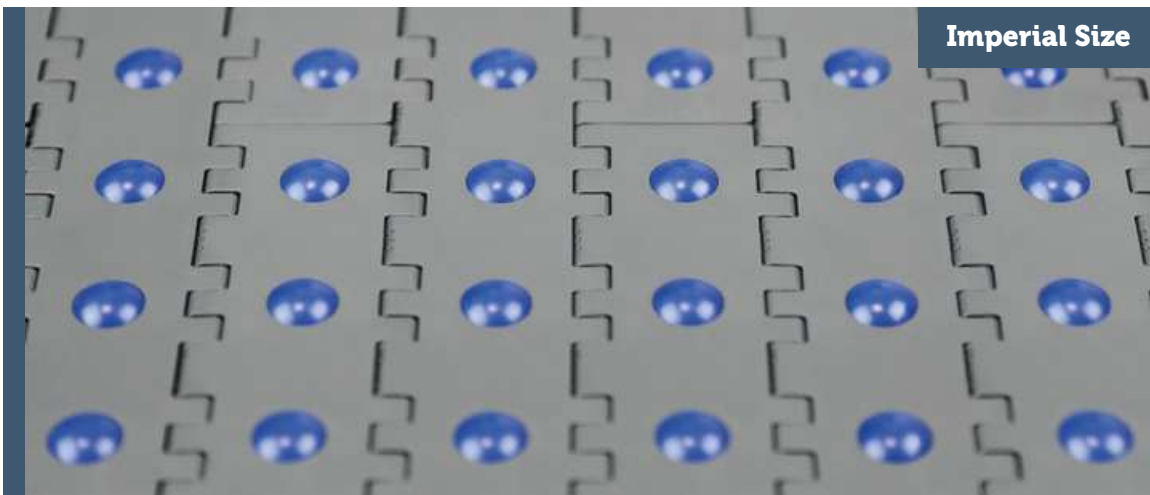

Imperial Size

553 FLEXTOP

NEW 553 FLEX TOP Tappeto Modulare 553 FLEXTOP, H=8,7 M=3" Modular Belt Series 553 FLEXTOP, H=8,7 M=3" / Modulare Mattenkette 553 FLEXTOP, H=8,7 M=3"

Backflex radius min.: 25 mm

Imperial Size

The new **Movex® 553 FlexTop** modular belt with self-locking spheres is specifically designed for high-precision material handling, suitable for several applications like logistic centers, packaging stations (food and beverage) and corrugated industries, easily to be integrated into existing systems. The 360° movement possibility makes the belt suitable for diverting, rotation, accumulation and acceleration applications and minimize required maintenance and downtimes. The small pitch between the spheres allows every type of product transfer and is ideal for small and light packages, unlike traditional roller conveyors.

The complete closed sliding belt surface is the perfect solution to carry carton boxes, crates, cans and bottles shrink-wrap packaging and any kind of polybag with Top-Accuracy package control. **553 FlexTop is best choice for material handling applications!**

High strength

Design and features of 553 FlexTop make it ideal for the transport of several type of products (e.g. polybags, shrink-wrap packaging).

Perfect product control

The small pitch between the spheres allows for a great product-control.


Self cleaning

A complete closed sliding surface, in combination with self-locking spheres, makes the belt design flexible and robust.

Great versatility


The directional belt underneath the flextop belt controls the direction and the speed of the spheres, making this belt 100% versatile.

Long durability

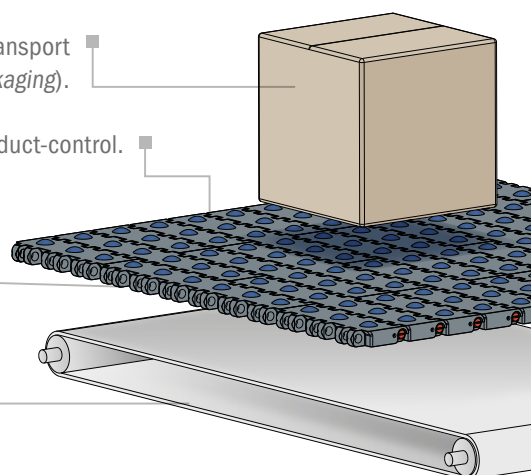

DIVERTING


Side movement

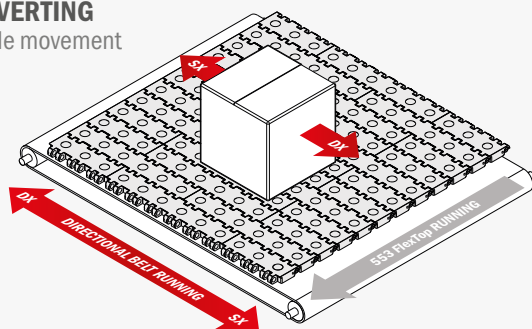

By using a directional belt underneath the Flextop belt, running square to the travel direction, the product can be transferred left and right.

ROTATION


Product stop

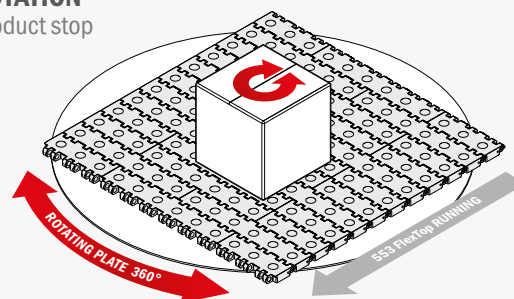

By using a rotating plate underneath the Flextop belt, sphere can rotate by 360°. This option can be used with product stopped or running on the belt, to easily positioning the product.


DINAMIC ROTATION

Product moving

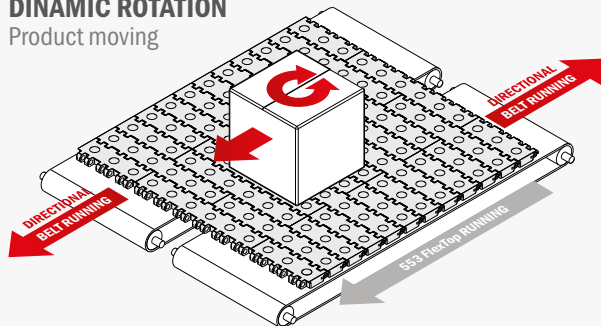

By using two auxiliary belts underneath the Flextop belt, running at opposite direction, the product will start rotating. With this option the Flextop belt can keep running.

ACCELERATION

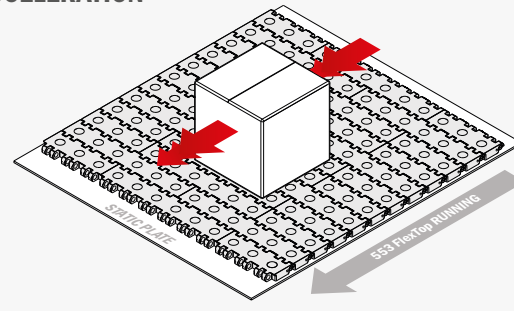

By using a static plate underneath the Flextop belt, spheres will start rotating independently, so the speed of the product will result double than the speed of the belt itself.

PATENTED

Belts wider than standard are available with 3 inch increments

553 FLEX TOP

Tappeti modulari / Modular belts / Mattenketten

NEW 553 FLEX TOP Tappeto Modulare 553 FLEXTOP, H=8,7 M=3"

Modular Belt Series 553 FLEXTOP, H=8,7 M=3" / Modulare Mattenkette 553 FLEXTOP, H=8,7 M=3"

CODE STRUCTURE GUIDE (Example)


Backflex radius min.: 25 mm

5530	27	0003	A
Series	*Material	Width	Version

	553 Sorter +	
pg. 326	pg. 301	pg. 651>661

SAMPLE BOX

Art.-Nr. 5530018888A

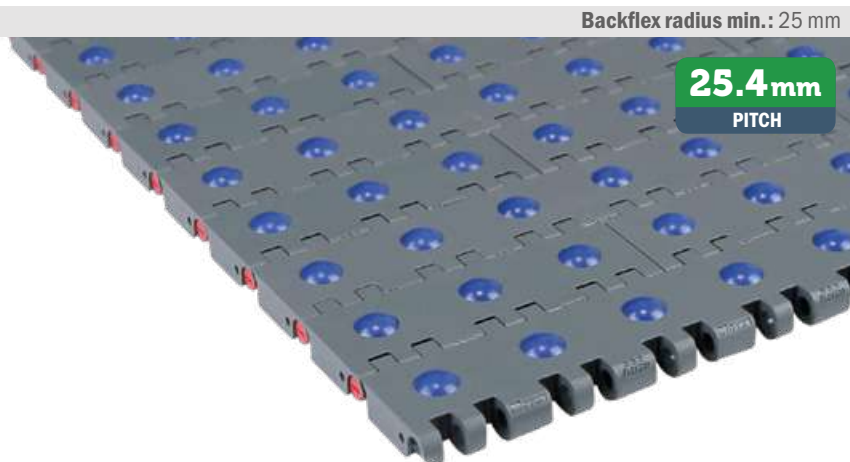

25.4mm
PITCH

Imperial Size

*Material

LFG - Code 27

Low friction Acetal


Max w. load: 27500 N/m
Weight: 10,0 kg/m²
Temp. range dry: -40÷80 °C
Temp. range wet: -40÷65 °C
Pin material: PBT white

Sphere Material

High-tech polyamide

Max w. load: 15 N
Sphere diameter: 12,7 mm

Version A - Standard

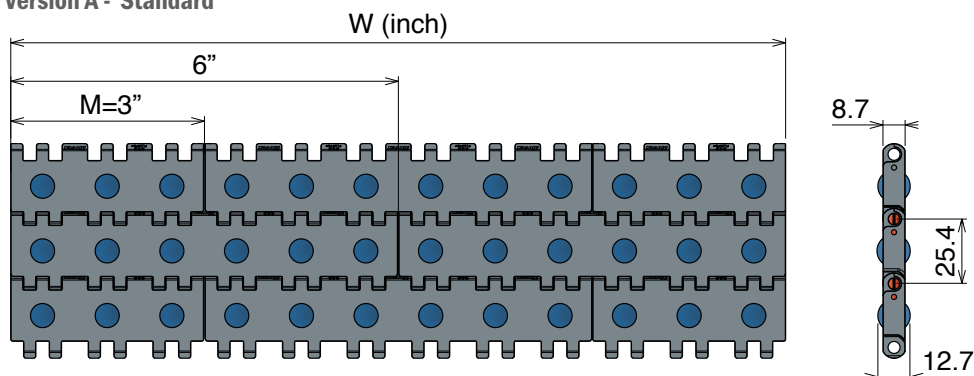

Version A - Standard

Series	Material	Width	Version	Series	Material	Width	Version
5530	*	0003	A	5530	*	0060	A
5530	*	0006	A	5530	*	0063	A
5530	*	0009	A	5530	*	0066	A
5530	*	0012	A	5530	*	0069	A
5530	*	0015	A	5530	*	0072	A
5530	*	0018	A	5530	*	0075	A
5530	*	0021	A	5530	*	0078	A
5530	*	0024	A	5530	*	0081	A
5530	*	0027	A	5530	*	0084	A
5530	*	0030	A	5530	*	0087	A
5530	*	0033	A	5530	*	0090	A
5530	*	0036	A	5530	*	0093	A
5530	*	0039	A	5530	*	0096	A
5530	*	0042	A	5530	*	0099	A
5530	*	0045	A	5530	*	0102	A
5530	*	0048	A	5530	*	0105	A
5530	*	0051	A	5530	*	0108	A
5530	*	0054	A	5530	*	0111	A
5530	*	0057	A	5530	*	0114	A

Continue >>



**PATENTED
CLOSED GAP**

Patented closed gap helps reducing maintenance frequency and increasing productivity.

556

Pitch 25,4 mm
H= 12,7 mm



556 FT
556 GT




556 FT Open Surface 25% Tappeto Modulare Curvilineo Serie 556 FT, H=12,7 M=3"

Side Flex Modular Belt Series 556 FT, H=12,7 M=3" / Kurvengängige Mattenkette Serie 556 FT, H=12,7 M=3"

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5431	01	0009	A
Series	*Material	Width	Version

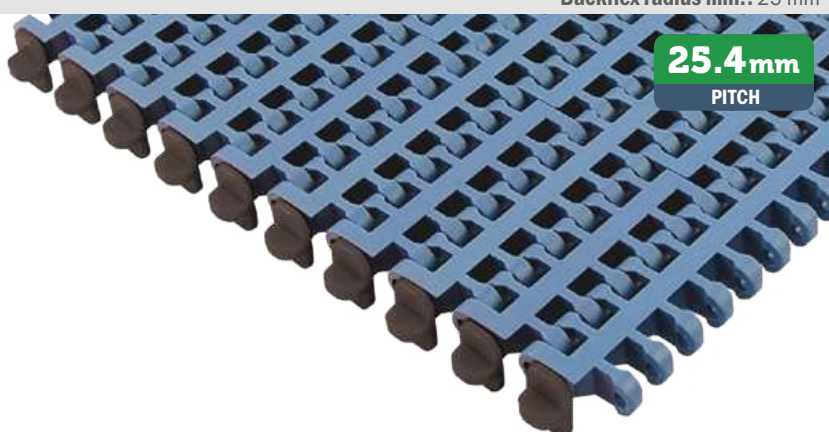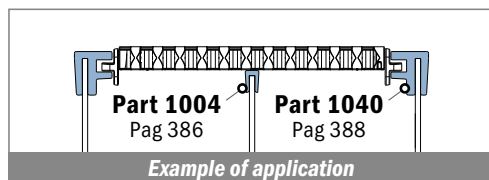

Imperial Size

*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight: 30000 N/m

Curve: 2000 N

Weight: 7,5 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load:

Straight: 30000 N/m

Curve: 2000 N

Weight: 7,5 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

PPB - Code 24

Polypropylene

Max w. load:

Straight: 19500 N/m

Curve: 1300 N


Weight: 5,8 kg/m²

Temp. range dry: 4÷104 °C


Temp. range wet: 4÷104 °C

Pin material: PP blu

**THE BEST CHOICE FOR
FOOD CONTACT APPLICATION**

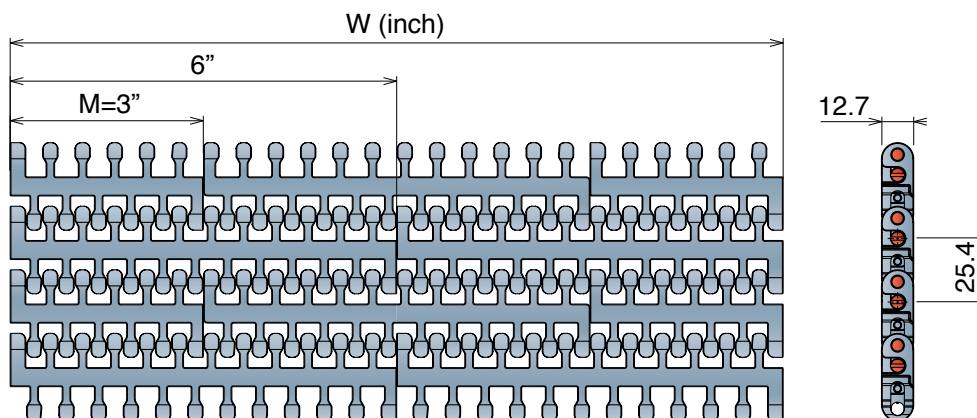


STANDARD




Series	Material	Width	Version	min radius
5431	*	0003	A	145
5431	*	0006	A	290
5431	*	0009	A	435
5431	*	0012	A	580
5431	*	0015	A	725
5431	*	0018	A	890
5431	*	0021	A	1040
5431	*	0024	A	1250

TAB



Series	Material	Width	Version	min radius
5431	*	0003	B	145
5431	*	0006	B	290
5431	*	0009	B	435
5431	*	0012	B	580
5431	*	0015	B	725
5431	*	0018	B	890
5431	*	0021	B	1040
5431	*	0024	B	1250

TAB/POSITIONER



Series	Material	Width	Version	min radius
5431	*	0003	C	145
5431	*	0006	C	290
5431	*	0009	C	435
5431	*	0012	C	580
5431	*	0015	C	725
5431	*	0018	C	890
5431	*	0021	C	1040
5431	*	0024	C	1250

556 GT Open Surface 25% Tappeto Modulare Curvilineo Serie 556 GT, H=12,7 M=3"



Side Flex Modular Belt Series 556 GT, H=12,7 M=3" / Kurvengängige Mattenkette Serie 556 GT, H=12,7 M=3"

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5433	01	0009	A
Series	*Material	Width	Version

	
pg. 327	pg. 651>661

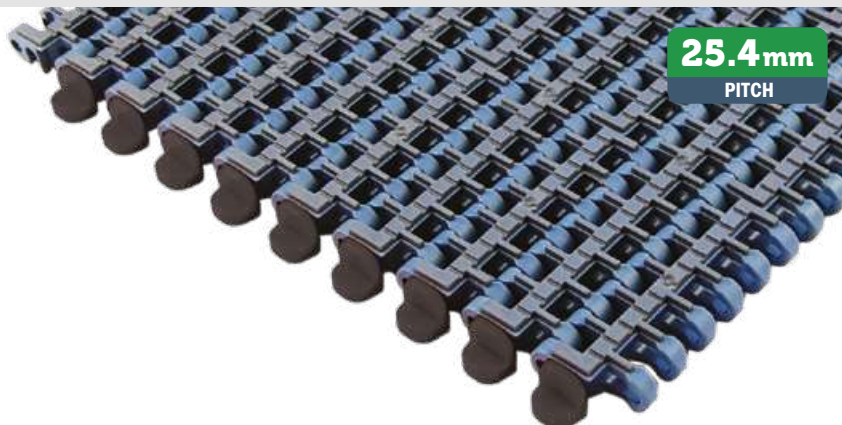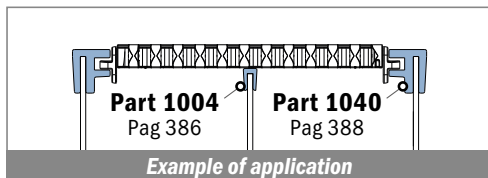

*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight: 30000 N/m

Curve: 2000 N

Weight: 7,7 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

Top rubber: 50 ShA-Dark grey

LFB - Code 23

Low friction Acetal

Max w. load:

Straight: 30000 N/m

Curve: 2000 N

Weight: 7,7 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

Top rubber: 50 ShA-Black

PPB - Code 24

Polypropylene

Max w. load:

Straight: 19500 N/m

Curve: 1300 N


Weight: 5,8 kg/m²

Temp. range dry: 4÷104 °C


Temp. range wet: 4÷104 °C

Pin material: PP blu

Top rubber: 50 ShA-Black

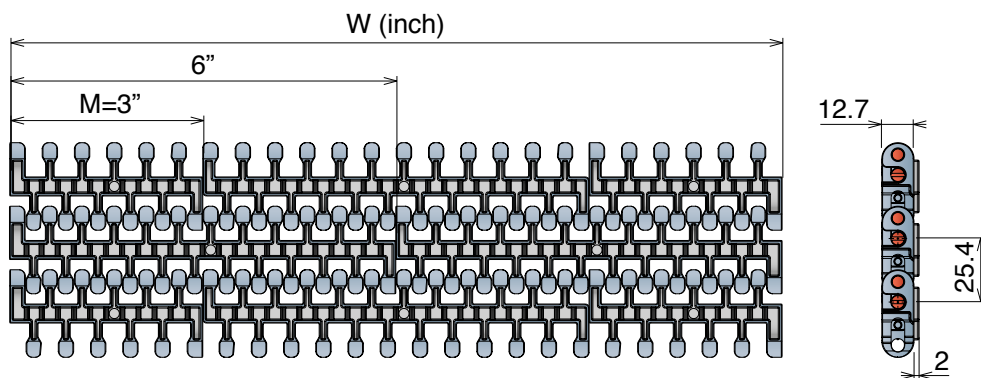


STANDARD




Series	Material	Width	Version	min radius
5433	*	0003	A	145
5433	*	0006	A	290
5433	*	0009	A	435
5433	*	0012	A	580
5433	*	0015	A	725
5433	*	0018	A	890
5433	*	0021	A	1040
5433	*	0024	A	1250

TAB



Series	Material	Width	Version	min radius
5433	*	0003	B	145
5433	*	0006	B	290
5433	*	0009	B	435
5433	*	0012	B	580
5433	*	0015	B	725
5433	*	0018	B	890
5433	*	0021	B	1040
5433	*	0024	B	1250

TAB/POSITIONER



Series	Material	Width	Version	min radius
5433	*	0003	C	145
5433	*	0006	C	290
5433	*	0009	C	435
5433	*	0012	C	580
5433	*	0015	C	725
5433	*	0018	C	890
5433	*	0021	C	1040
5433	*	0024	C	1250

600

Pitch 31,75 mm
H= 12,7 mm



600 *Standard*

600 *Heavy duty*

600 *Heavy duty
with Bearings*

600 *Small radius*

600 *Heavy duty/Small radius*

600 *Heavy duty/Small radius
with Bearings*

600 *with pusher*

1047 *Heavy duty guide*

600 Standard

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85

Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5421	01	0255	A
Series	*Material	Width	Version

29.5%
OPEN SURFACE

31.75 mm
PITCH

pg. 330	pg. 170/171	pg. 651>661



*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m
Curve 2500 N

Weight: 7,7 kg/m²

Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load:

Straight 30000 N/m
Curve 2500 N


Weight: 7,7 kg/m²

Temp. range dry: -40+80 °C


Temp. range wet: -40+65 °C

Pin material: PBT white

Internal Min Radius
2 times the width

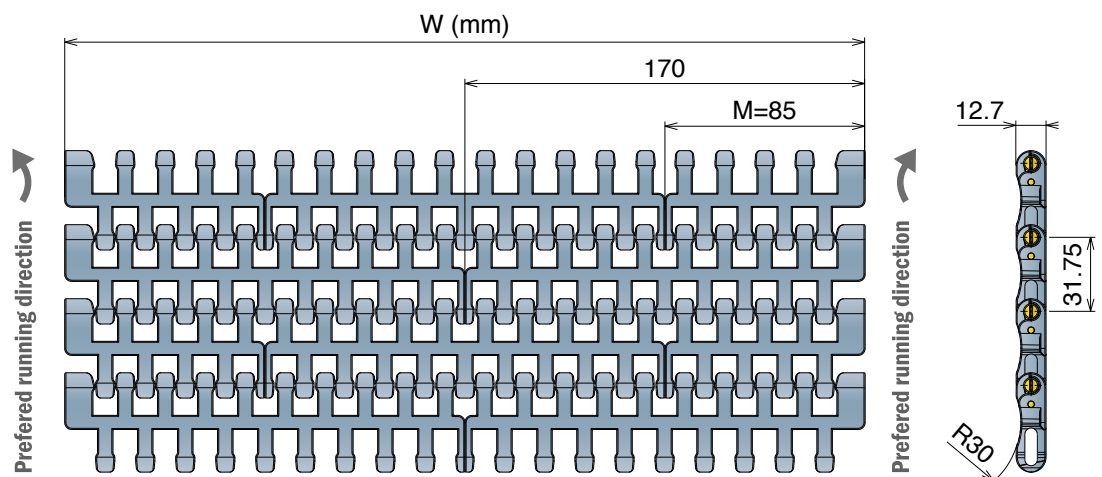

STANDARD




Series	Material	Width	Version	min radius
5421	*	0255	A	510
5421	*	0340	A	680
5421	*	0425	A	850
5421	*	0510	A	1020
5421	*	0595	A	1190
5421	*	0680	A	1360
5421	*	0765	A	1530
5421	*	0850	A	1700

TAB




Series	Material	Width	Version	min radius
5421	*	0255	B	510
5421	*	0340	B	680
5421	*	0425	B	850
5421	*	0510	B	1020
5421	*	0595	B	1190
5421	*	0680	B	1360
5421	*	0765	B	1530
5421	*	0850	B	1700

REVERSE TAB



Series	Material	Width	Version	min radius
5421	*	0255	C	510
5421	*	0340	C	680
5421	*	0425	C	850
5421	*	0510	C	1020
5421	*	0595	C	1190
5421	*	0680	C	1360
5421	*	0765	C	1530
5421	*	0850	C	1700

TAB REVERSE TAB



Series	Material	Width	Version	min radius
5421	*	0255	D	510
5421	*	0340	D	680
5421	*	0425	D	850
5421	*	0510	D	1020
5421	*	0595	D	1190
5421	*	0680	D	1360
5421	*	0765	D	1530
5421	*	0850	D	1700

600 Heavy duty

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85
Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5422	01	0255	E
Series	*Material	Width	Version

27.5%
OPEN SURFACE

31.75 mm
PITCH

pg. 330	pg. 172	pg. 651>661

RANGE EXTENSION



Metric Size

*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m

Curve 3500 N

Weight: 8,3 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load:

Straight 30000 N/m

Curve 3500 N


Weight: 8,3 kg/m²

Temp. range dry: -40÷80 °C


Temp. range wet: -40÷65 °C

Pin material: PBT white

Internal Min Radius
2 times the width

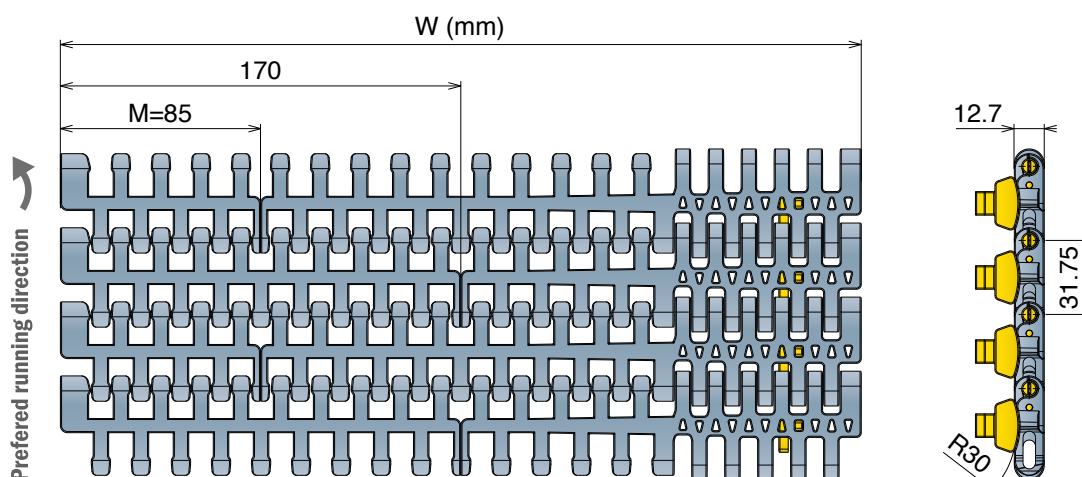

STANDARD



Series	Material	Width	Version	min radius
5422	*	0255	E	510
5422	*	0340	E	680
5422	*	0425	E	850
5422	*	0510	E	1020
5422	*	0595	E	1190
5422	*	0680	E	1360
5422	*	0765	E	1530
5422	*	0850	E	1700

TAB DKM Material



600 Heavy duty with Bearings

Tappeti modulari / Modular belts / Mattenketten

Belts wider than standard are available with 85 mm increments

600 Heavy duty with Bearings

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85
Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5422	01	0340	F
Series	*Material	Width	Version

27.5%

OPEN SURFACE

31.75 mm

PITCH

pg. 330	pg. 173	pg. 651>661

RANGE EXTENSION



*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m

Curve 3500 N

Weight: 9,0 kg/m²

Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load:

Straight 30000 N/m


Curve 3500 N

Weight: 9,0 kg/m²


Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C


Pin material: PBT white

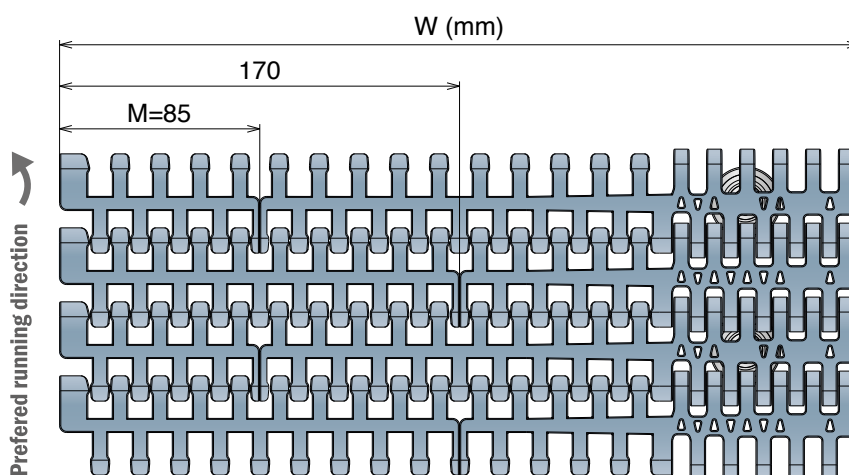

Internal Min Radius
2 times the width

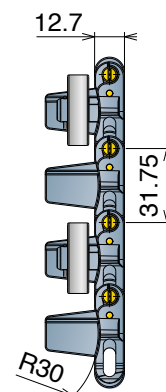

STANDARD



Series	Material	Width	Version	min radius
5422	*	0255	F	510
5422	*	0340	F	680
5422	*	0425	F	850
5422	*	0510	F	1020
5422	*	0595	F	1190
5422	*	0680	F	1360
5422	*	0765	F	1530
5422	*	0850	F	1700

Bearing Zoom



600 Small radius

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85
Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5423	01	0340	A
Series	*Material	Width	Version

29.5%
OPEN SURFACE

31.75 mm
PITCH

		
pg. 330-331	pg. 170/171	pg. 651>661



*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m
Curve 2500 N

Weight: 7.0 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load:


Straight 30000 N/m
Curve 2500 N

Weight: 7.0 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

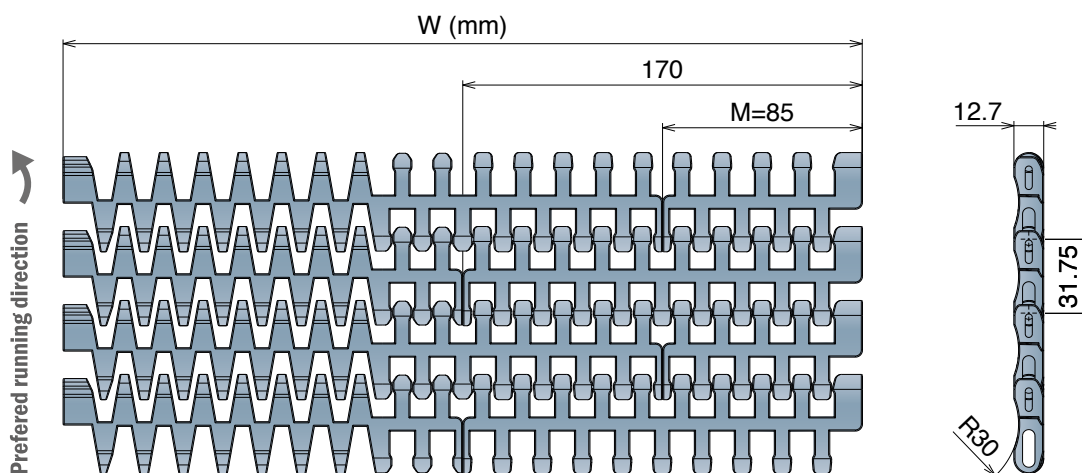


STANDARD




Series	Material	Width	Version	min radius
5423	*	0340	A	400
5423	*	0425	A	500
5423	*	0510	A	600
5423	*	0595	A	720
5423	*	0680	A	880
5423	*	0765	A	1040
5423	*	0850	A	1200

TAB




Series	Material	Width	Version	min radius
5423	*	0340	B	400
5423	*	0425	B	500
5423	*	0510	B	600
5423	*	0595	B	720
5423	*	0680	B	880
5423	*	0765	B	1040
5423	*	0850	B	1200

REVERSE TAB



Series	Material	Width	Version	min radius
5423	*	0340	C	400
5423	*	0425	C	500
5423	*	0510	C	600
5423	*	0595	C	720
5423	*	0680	C	880
5423	*	0765	C	1040
5423	*	0850	C	1200

TAB REVERSE TAB



Series	Material	Width	Version	min radius
5423	*	0340	D	400
5423	*	0425	D	500
5423	*	0510	D	600
5423	*	0595	D	720
5423	*	0680	D	880
5423	*	0765	D	1040
5423	*	0850	D	1200

600 Heavy duty/Small radius

Tappeti modulari / Modular belts / Mattenketten

Belts wider than standard are available with 85 mm increments

600 Heavy duty/Small radius

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=170
Side Flex Modular Belt Series 600, H=12,7 M=170 / Kurvengängige Mattenkette Serie 600, H=12,7 M=170

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5424	01	0425	E
Series	*Material	Width	Version

27.5%


OPEN SURFACE

31.75 mm

PITCH

pg. 330-331	pg. 172	pg. 651>661

RANGE EXTENSION

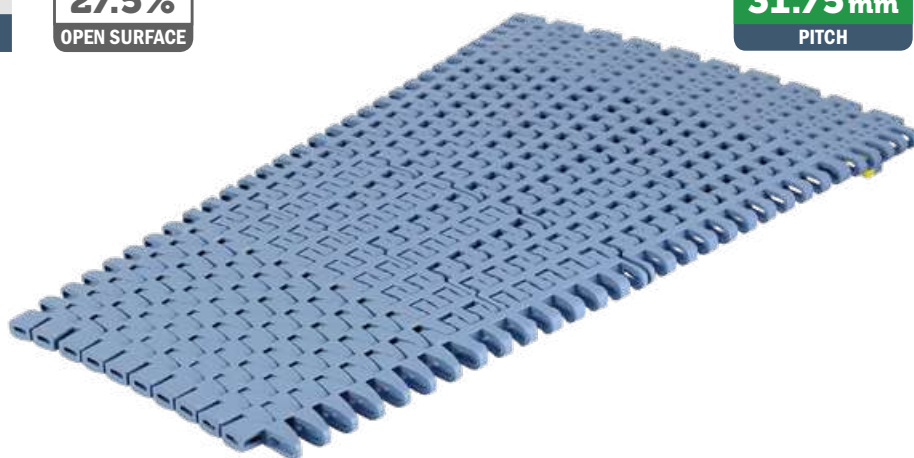

*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m

Curve 3500 N

Weight: 7,5 kg/m²

Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load:

Straight 30000 N/m


Curve 3500 N

Weight: 7,5 kg/m²


Temp. range dry: -40+80 °C

Temp. range wet: -40+65 °C

Pin material: PBT white

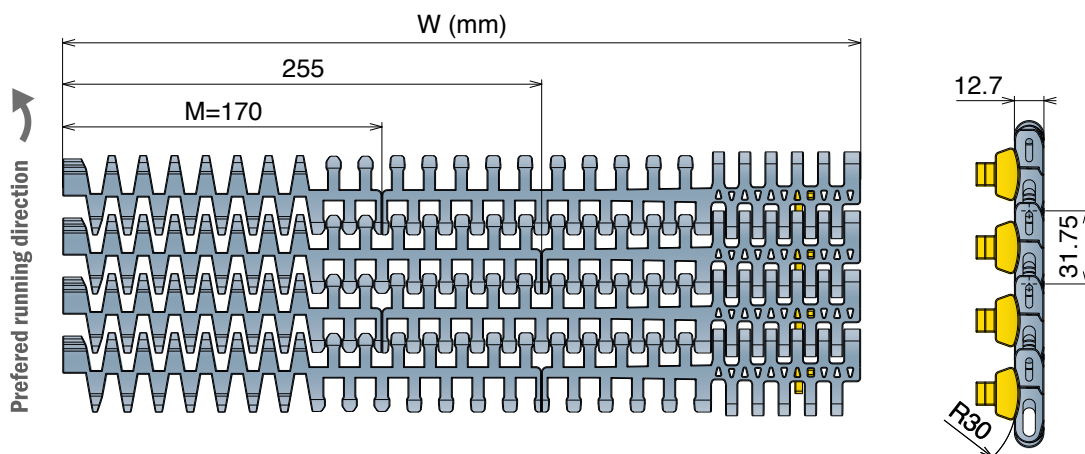

STANDARD



Series	Material	Width	Version	min radius
5424	*	0255	E	390
5424	*	0340	E	420
5424	*	0425	E	500
5424	*	0510	E	600
5424	*	0595	E	720
5424	*	0680	E	880
5424	*	0765	E	1040
5424	*	0850	E	1200

TAB DKM Material



Movex

600 Heavy duty/Small radius with Bearings

Belts wider than standard are available with 85 mm increments

Tappeti modulari / Modular belts / Mattenketten

600 Heavy duty/Small radius with Bearings

Tappeto Curvilineo Serie 600, H=12,7 M=170

Side Flex Modular Belt Series 600, H=12,7 M=170 / Kurvengängige Mattenkette Serie 600, H=12,7 M=170

CODE STRUCTURE GUIDE (Example)

Backflex radius min.: 25 mm

5424	01	0425	F
Series	*Material	Width	Version

27.5%
OPEN SURFACE

31.75 mm
PITCH

pg. 330-331	pg. 173	pg. 651>661

RANGE EXTENSION



*Material

LFA - Code 01

Low friction Acetal

Max w. load:

Straight 30000 N/m
Curve 3500 N

Weight: 8,5 kg/m²

Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

LFB - Code 23

Low friction Acetal

Max w. load:


Straight 30000 N/m
Curve 3500 N

Weight: 8,5 kg/m²


Temp. range dry: -40÷80 °C

Temp. range wet: -40÷65 °C

Pin material: PBT white

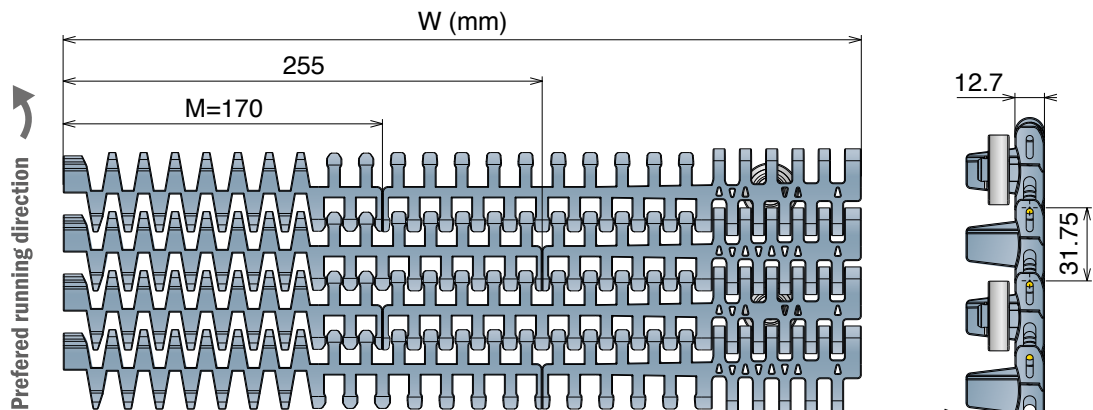

STANDARD



Series	Material	Width	Version	min radius
5424	*	0255	F	390
5424	*	0340	F	420
5424	*	0425	F	500
5424	*	0510	F	600
5424	*	0595	F	720
5424	*	0680	F	880
5424	*	0765	F	1040
5424	*	0850	F	1200

Bearing Zoom



600 with pusher - 1047 Heavy duty guide


Tappeti modulari / Modular belts / Mattenketten

Metric Size

600 with pusher

Tappeto Modulare Curvilineo Serie 600, H=12,7 M=85

Side Flex Modular Belt Series 600, H=12,7 M=85 / Kurvengängige Mattenkette Serie 600, H=12,7 M=85

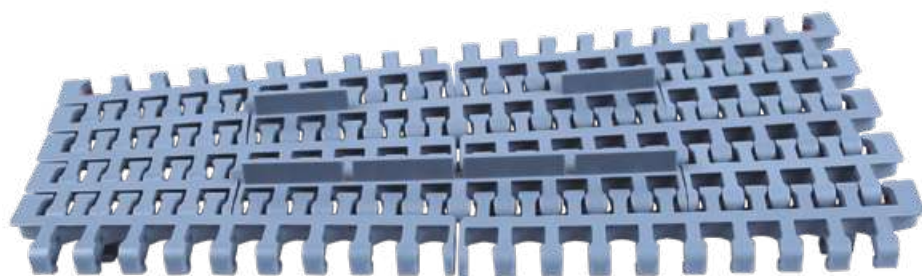


31.75 mm
PITCH





pg. 330



pg. 170/171



pg. 651-661

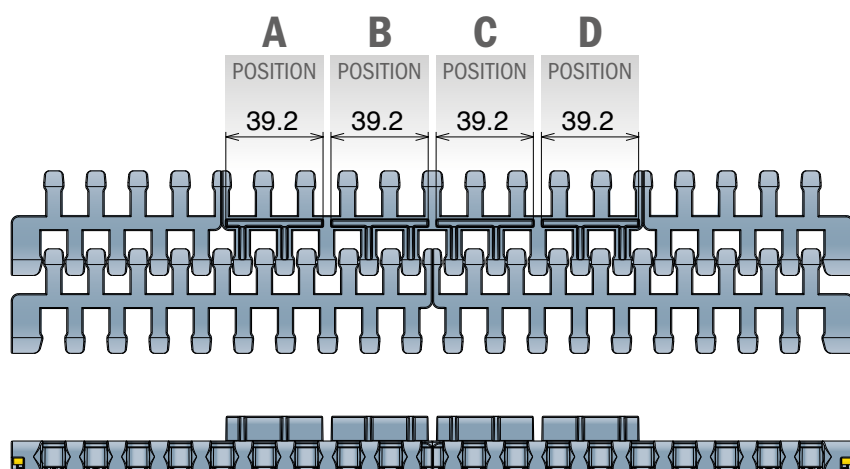


The pusher is applicable only for the center module, and there are available up to a maximum of 4 positions (**A-B-C-D**) or with different types of combinations (example **A-B-D** / **A-C** / **B-C-D**).

Consult our engineering department for details.

1047

Guida tappeto

Belt side guide / Seitenführung für Mattenkette

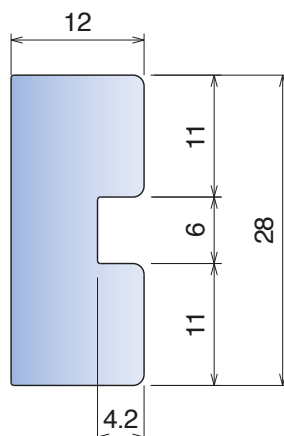

Part	Article-Nr.	Material	Width
1047	104700BC	BluLub	3 m

Material: Polyethylene UHMW-PE with molecular density 9,200,000 g/mo.

BluLub® new material with reduced coefficient of friction and higher wear resistance. BluLub complies with the code of Federal Regulations of FDA.
Linear expansion coefficient: $1.1 \times 10^{-4} \text{ } ^\circ\text{F}^{-1}$ ($2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$)
Operating temperature: -40 to 176°F (-40 to +80°C)

500

Pitch 50,8 mm
H= 24 mm

Imperial Size



500 RR
500 RR *with positioner*
389 *Combs*

500 RR

Tappeto Modulare 500 RR


Raised Rib Belt Series 500 RR / Modulare Mattenkette 500 RR

CODE STRUCTURE GUIDE (Example)

1348	02	0060
Series	*Material	Width



pg. 333-334



pg. 651>661



50.8mm
PITCH

* Material

PP - Code 02

Polypropylene

Max w. load: 30000 N/m
Weight: 10,65 kg/m²
Temp. range: 4÷104 °C

PPX - Code 11



Polypropylene

Max w. load: 30000 N/m
Weight: 10,65 kg/m²
Temp. range: 4÷104 °C

Pin material: PP grey Pin material: PP grey

IMPROVED HEAT STABILITY


Series	Material	Width
1348	*	0060
1348	*	0063
1348	*	0066
1348	*	0069
1348	*	0072
1348	*	0075
1348	*	0078
1348	*	0081
1348	*	0084
1348	*	0087
1348	*	0090
1348	*	0093
1348	*	0096
1348	*	0099
1348	*	0102
1348	*	0105
1348	*	0108
1348	*	0111
1348	*	0114
1348	*	0117
1348	*	0120

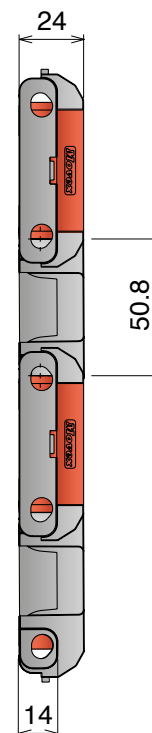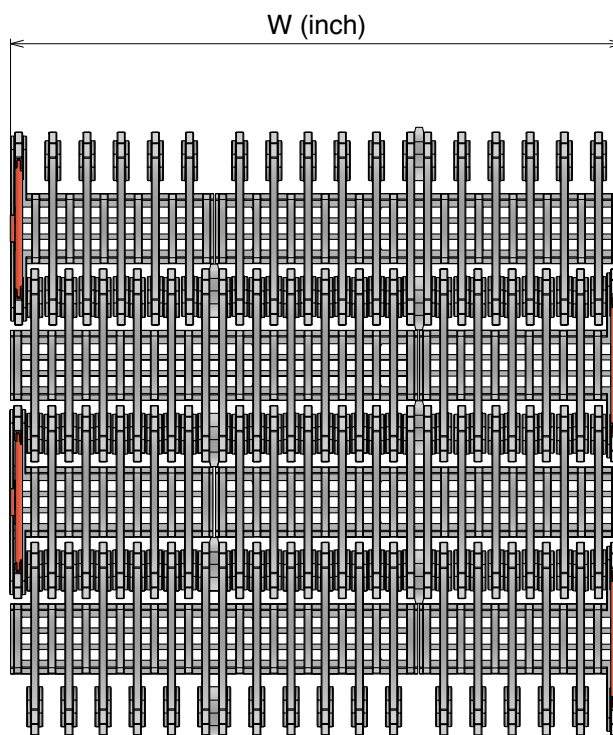

NEW 500 RR *with positioner* Tappeto Modulare 500 RR Raised Rib Belt Series 500 RR / Modulare Mattenkette 500 RR

CODE STRUCTURE GUIDE (Example)

1348	02	0060	C
Series	*Material	Width	Version



50.8mm
PITCH

Imperial Size

*Material

PP - Code 02 Polypropylene

Max w. load: 30000 N/m
Weight: 10,65 kg/m²
Temp. range: 4÷104 °C



PPX - Code 11 Polypropylene

Max w. load: 30000 N/m
Weight: 10,65 kg/m²
Temp. range: 4÷104 °C


Pin material: PP grey Pin material: PP grey

IMPROVED HEAT STABILITY

Series	Material	Width	Version
1348	*	0060	C
1348	*	0063	C
1348	*	0066	C
1348	*	0069	C
1348	*	0072	C
1348	*	0075	C
1348	*	0078	C
1348	*	0081	C
1348	*	0084	C
1348	*	0087	C
1348	*	0090	C
1348	*	0093	C
1348	*	0096	C
1348	*	0099	C
1348	*	0102	C
1348	*	0105	C
1348	*	0108	C
1348	*	0111	C
1348	*	0114	C
1348	*	0117	C
1348	*	0120	C

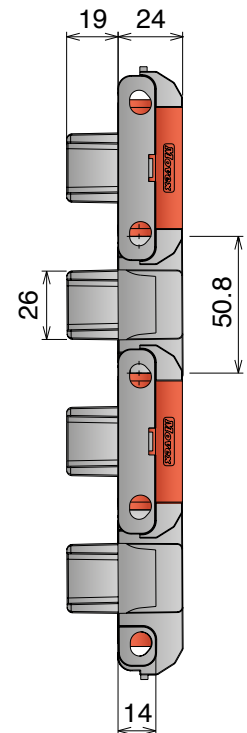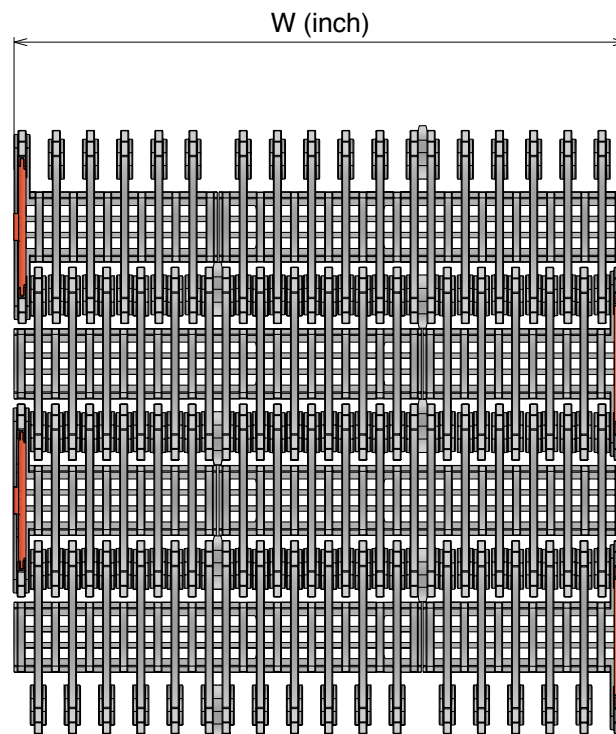

Bottom view

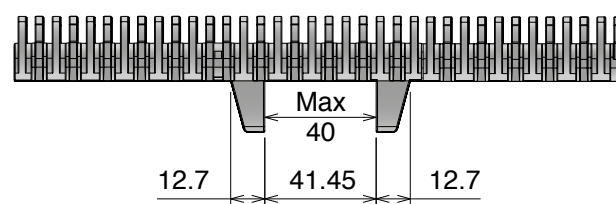


For belt widths multiple of 3", positioners are centered (e.g. 63,69,75,81 inches).
For belt widths multiple of 6", positioners are 1,5" offset (e.g. 60,66,72,78 inches).

389

Pettine
Combs / Fingerplatte


Two screw included



For assembly instructions refers to Movex engineering manual available on our website.


Type A

Part	Article-Nr.
389	38901

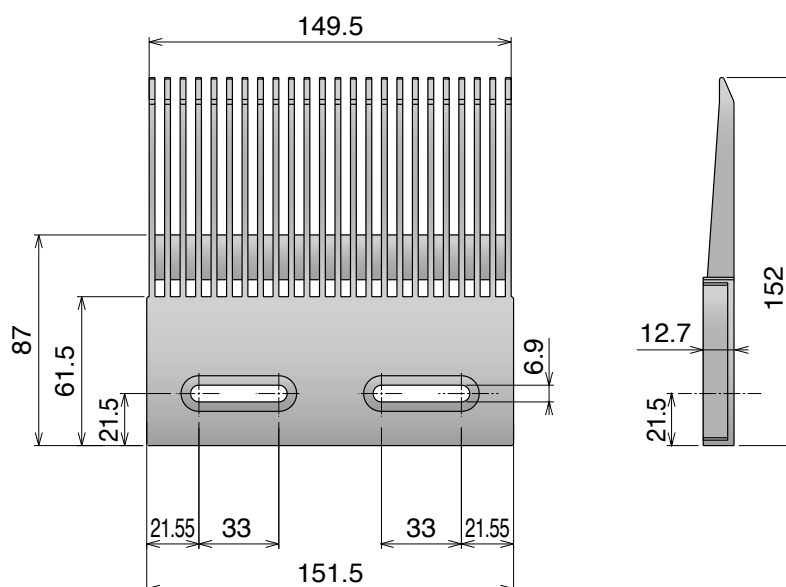

Type B

Part	Article-Nr.
389	38902

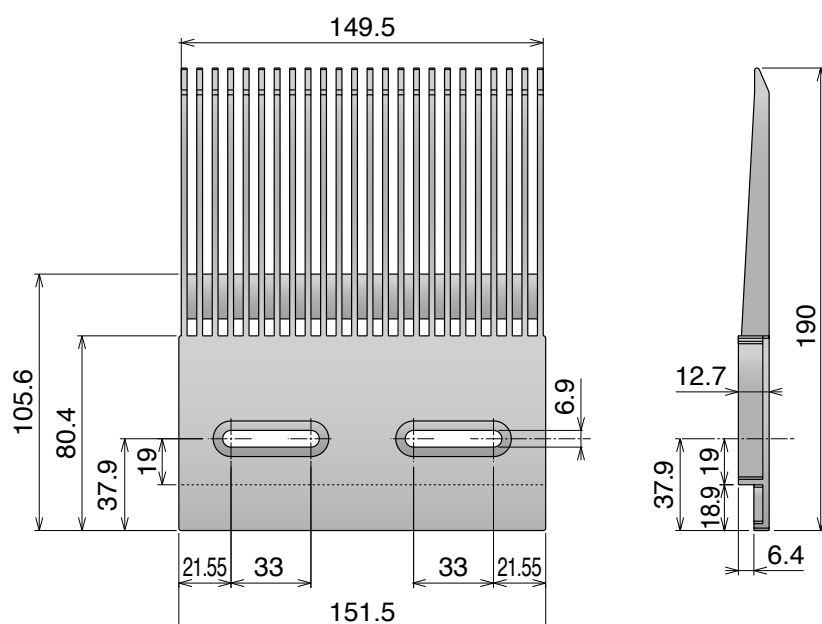

ZERO CONTACT

ZERO⁵²⁰CONTACT

SIDE FLEX MODULAR BELT



ZERO CONTACT
ZERO CONTACT PRO

Movex[®]

ZERO CONTACT

Tappeto Modulare Curvilineo Zero Contact™, H=10,1 M=200

Side Flex Modular Belt Zero Contact™, H=10,1 M=200 / Kurvengängige Mattenkette Zero Contact™, H=10,1 M=200



pg. 332

Zero contact
Curve

pg. 286/292



pg. 651>661

SAMPLE BOX

Art.-Nr. 5999999925A

Material


LFA - Code 01

Low friction Acetal

LFB - Code 23

Low friction Acetal

Max w. load:	13500 N/m	Max w. load:	13500 N/m
Weight:	9,25 kg/m ²	Weight:	9,25 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷65 °C
Pin material:	PBT white	Pin material:	PBT white

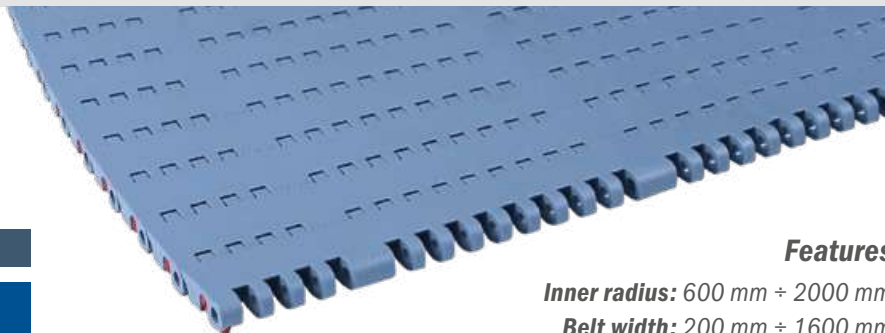

Features

Inner radius: 600 mm ÷ 2000 mm


Belt width: 200 mm ÷ 1600 mm

Angle: 90° and 180° (different on request)

Row to row angle: 1,33°

Pin material: Ø4,7 mm, PBT White

Open Area: 0%

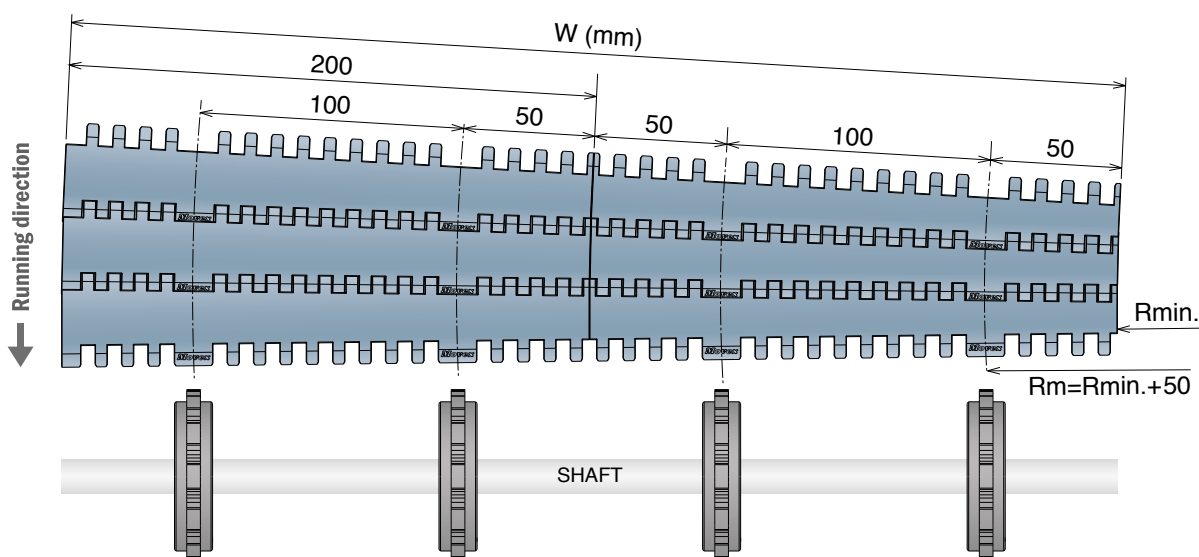


Movex® Zero Contact™ modular fixed radius curve belt is the best choice for all type of transportation, for beverage, food and logistic industries, thanks to its versatility.

It offers high performances, reducing the coefficient of friction between product and running belt surface and improves the efficiency of the line, by minimizing downtimes.

A wide range of radii and widths helps finding the right solution for every product dimension and transportation condition, from light packages to heavier ones.

Installation and maintenance have never been so easy, so far.

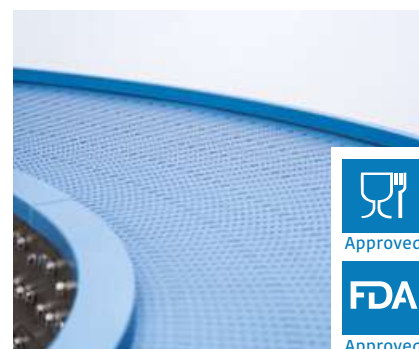

The belt is compliant to:

EC 1935/2004, Regulation EU 10/2011

FDA 21 CFR 177.2470



**Low
friction**



**Minimized
maintenance**




**Easy pin
removal**

Delivery: **Easy** **Standard**

ZERO CONTACT

SIDE FLEX MODULAR BELT



Side Flex Modular Belt Zero Contact™ 90° | Length of the belt 150 Modules


Belt Width	R, 600	R, 800	R, 1000	R, 1200	R, 1400	R, 1600	R, 1800	R, 2000	Material
200	5451010201A	5451010202A	5451010203A	5451010204A	5451010205A	5451010206A	5451010207A	5451010208A	LFA
400	5451010401A	5451010402A	5451010403A	5451010404A	5451010405A	5451010406A	5451010407A	-	
600	5451010601A	5451010602A	5451010603A	5451010604A	5451010605A	5451010606A	-	-	
800	5451010801A	5451010802A	5451010803A	5451010804A	5451010805A	-	-	-	
1000	5451011001A	5451011002A	5451011003A	5451011004A	-	-	-	-	
1200	5451011201A	5451011202A	5451011203A	-	-	-	-	-	
1400	5451011401A	5451011402A	-	-	-	-	-	-	
1600	5451011601A	-	-	-	-	-	-	-	

Side Flex Modular Belt Zero Contact™ 90° | Length of the belt 150 Modules

Belt Width	R, 600	R, 800	R, 1000	R, 1200	R, 1400	R, 1600	R, 1800	R, 2000	Material
200	5451230201A	5451230202A	5451230203A	5451230204A	5451230205A	5451230206A	5451230207A	5451230208A	LFB
400	5451230401A	5451230402A	5451230403A	5451230404A	5451230405A	5451230406A	5451230407A	-	
600	5451230601A	5451230602A	5451230603A	5451230604A	5451230605A	5451230606A	-	-	
800	5451230801A	5451230802A	5451230803A	5451230804A	5451230805A	-	-	-	
1000	5451231001A	5451231002A	5451231003A	5451231004A	-	-	-	-	
1200	5451231201A	5451231202A	5451231203A	-	-	-	-	-	
1400	5451231401A	5451231402A	-	-	-	-	-	-	
1600	5451231601A	-	-	-	-	-	-	-	

ZERO CONTACT

SIDE FLEX MODULAR BELT



Side Flex Modular Belt Zero Contact™ 180° | Length of the belt 285 Modules

Belt Width	R, 600	R, 800	R, 1000	R, 1200	R, 1400	R, 1600	R, 1800	R, 2000	Material
200	5452010201A	5452010202A	5452010203A	5452010204A	5452010205A	5452010206A	5452010207A	5452010208A	LFA
400	5452010401A	5452010402A	5452010403A	5452010404A	5452010405A	5452010406A	5452010407A	-	
600	5452010601A	5452010602A	5452010603A	5452010604A	5452010605A	5452010606A	-	-	
800	5452010801A	5452010802A	5452010803A	5452010804A	5452010805A	-	-	-	
1000	5452011001A	5452011002A	5452011003A	5452011004A	-	-	-	-	
1200	5452011201A	5452011202A	5452011203A	-	-	-	-	-	
1400	5452011401A	5452011402A	-	-	-	-	-	-	
1600	5452011601A	-	-	-	-	-	-	-	

Side Flex Modular Belt Zero Contact™ 180° | Length of the belt 285 Modules

Belt Width	R, 600	R, 800	R, 1000	R, 1200	R, 1400	R, 1600	R, 1800	R, 2000	Material
200	5452230201A	5452230202A	5452230203A	5452230204A	5452230205A	5452230206A	5452230207A	5452230208A	LFB
400	5452230401A	5452230402A	5452230403A	5452230404A	5452230405A	5452230406A	5452230407A	-	
600	5452230601A	5452230602A	5452230603A	5452230604A	5452230605A	5452230606A	-	-	
800	5452230801A	5452230802A	5452230803A	5452230804A	5452230805A	-	-	-	
1000	5452231001A	5452231002A	5452231003A	5452231004A	-	-	-	-	
1200	5452231201A	5452231202A	5452231203A	-	-	-	-	-	
1400	5452231401A	5452231402A	-	-	-	-	-	-	
1600	5452231601A	-	-	-	-	-	-	-	

ZERO CONTACT PRO

Tappeto Modulare Curvilineo Zero Contact PRO, H=9

Side Flex Modular Belt Zero Contact PRO, H=9 / Kurvgängige Mattenkette Zero Contact PRO, H=9

	
Zero contact Pro Curve	
pg. 332	pg. 288/290
	pg. 651>661

SAMPLE BOX

Art.-Nr. **5999999925A**

Material

PA - Code 28

Glass fiber reinforced

Max w. load: 19000 N/m
Weight: 9,25 kg/m²
Temp. range dry: -30÷100 °C
Temp. range wet: N.R.
Pin: Stainless steel

Features

Inner radius: 586 mm ÷ 1541 mm

Belt width: 249 mm ÷ 1034 mm



Angle: 90° and 180° (different on request)

Row to row angle: 1°

Pin: Ø4 mm, material 1.4301

Open Area: 0%

ZERO CONTACT
SIDE FLEX MODULAR BELT

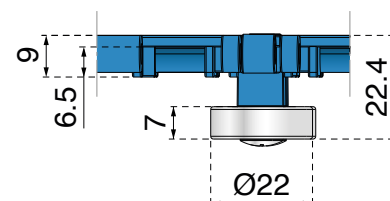

Side Flex Modular Belt Zero Contact PRO™ 90° | Without bearings | Length of the belt 200 modules

Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm
5461280439A-M	586	439	5462281034A-M	756	1034	5464280504A-M	1116	504
5461280524A-M	586	524	5463280269A-M	1011	269	5465280419A-M	1201	419
5461280864A-M	586	864	5463280439A-M	1011	439	5466280249A-M	1286	249
5461281034A-M	586	1034	5463280524A-M	1011	524	5465280504A-M	1286	504
5462280269A-M	756	269	5463280864A-M	1011	864	5466280419A-M	1456	419
5462280439A-M	756	439	5463281034A-M	1011	1034	5466280504A-M	1541	504
5462280524A-M	756	524	5465280249A-M	1031	249			
5462280864A-M	756	864	5464280419A-M	1031	419			

Side Flex Modular Belt Zero Contact PRO™ 90° | With bearings | Length of the belt 200 modules

Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm
5462280249A-M	1031	249	5463280249A-M	1286	249
5461280419A-M	1031	419	5462280504A-M	1286	504
5461280504A-M	1116	504	5463280419A-M	1456	419
5462280419A-M	1201	419	5463280504A-M	1541	504



Side Flex Modular Belt Zero Contact PRO™ 90° | Two track combinations | Length of the belts 200 modules

Track 1 - Order code	R _i - mm	W - mm		Track 2 - Order code	R _i - mm	W - mm		Total width
5462280269A-M	756	269	+	5462280249A-M	1031	249	=	524
5463280269A-M	1011	269	+	5463280249A-M	1286	249	=	524
5461280439A-M	586	439	+	5461280419A-M	1031	419	=	864
5462280439A-M	756	439	+	5462280419A-M	1201	419	=	864
5463280439A-M	1011	439	+	5463280419A-M	1456	419	=	864
5461280524A-M	586	524	+	5461280504A-M	1116	504	=	1034
5462280524A-M	756	524	+	5462280504A-M	1286	504	=	1034
5463280524A-M	1011	524	+	5463280504A-M	1541	504	=	1034


The gap between the belts is 6 mm. | Track 1 belt is supplied without bearings. | Track 2 belt is supplied with bearings.

Continue >>

Movex

ZERO CONTACT

SIDE FLEX MODULAR BELT



Side Flex Modular Belt Zero Contact PRO™ 180° | Without bearings | Length of the belt 380 modules

Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm
5461280439B-M	586	439	5462281034B-M	756	1034	5464280504B-M	1116	504
5461280524B-M	586	524	5463280269B-M	1011	269	5465280419B-M	1201	419
5461280864B-M	586	864	5463280439B-M	1011	439	5466280249B-M	1286	249
5461281034B-M	586	1034	5463280524B-M	1011	524	5465280504B-M	1286	504
5462280269B-M	756	269	5463280864B-M	1011	864	5466280419B-M	1456	419
5462280439B-M	756	439	5463281034B-M	1011	1034	5466280504B-M	1541	504
5462280524B-M	756	524	5465280249B-M	1031	249			
5462280864B-M	756	864	5464280419B-M	1031	419			

Side Flex Modular Belt Zero Contact PRO™ 180° | With bearings | Length of the belt 380 modules

Order code	R _i - mm	W - mm	Order code	R _i - mm	W - mm
5462280249B-M	1031	249	5463280249B-M	1286	249
5461280419B-M	1031	419	5462280504B-M	1286	504
5461280504B-M	1116	504	5463280419B-M	1456	419
5462280419B-M	1201	419	5463280504B-M	1541	504



Side Flex Modular Belt Zero Contact PRO™ 180° | Two track combinations | Length of the belts 380 modules

Track 1 - Order code	R _i - mm	W - mm	Track 2 - Order code	R _i - mm	W - mm	Total width
5462280269B-M	756	269	+ 5462280249B-M	1031	249	= 524
5463280269B-M	1011	269	+ 5463280249B-M	1286	249	= 524
5461280439B-M	586	439	+ 5461280419B-M	1031	419	= 864
5462280439B-M	756	439	+ 5462280419B-M	1201	419	= 864
5463280439B-M	1011	439	+ 5463280419B-M	1456	419	= 864
5461280524B-M	586	524	+ 5461280504B-M	1116	504	= 1034
5462280524B-M	756	524	+ 5462280504B-M	1286	504	= 1034
5463280524B-M	1011	524	+ 5463280504B-M	1541	504	= 1034

The gap between the belts is 6 mm. | Track 1 belt is supplied without bearings. | Track 2 belt is supplied with bearings.

The innovative design of **Movex® Zero Contact™ PRO** is recommended for high speed, heavy loads and transportation of abrasive substances, like sand, salt, sugar, and many other applications.

The stainless steel pins guarantee a higher working load and due to the new pin retention with grub screw, the assembly of this belt is 100% secure.

The robust structure of **Zero Contact™ PRO** can be summarized in minimal maintenance, long life expectation and high reliability.

Zero Contact™ PRO is a versatile belt, allowing a wider range of available widths and radii. Find out also our “two-tracks” version.



Extreme speed



Heavy duty




High abrasion resistance

260/261

Pitch 25,4 mm

H= 21 mm / 25 mm / 28,7 mm

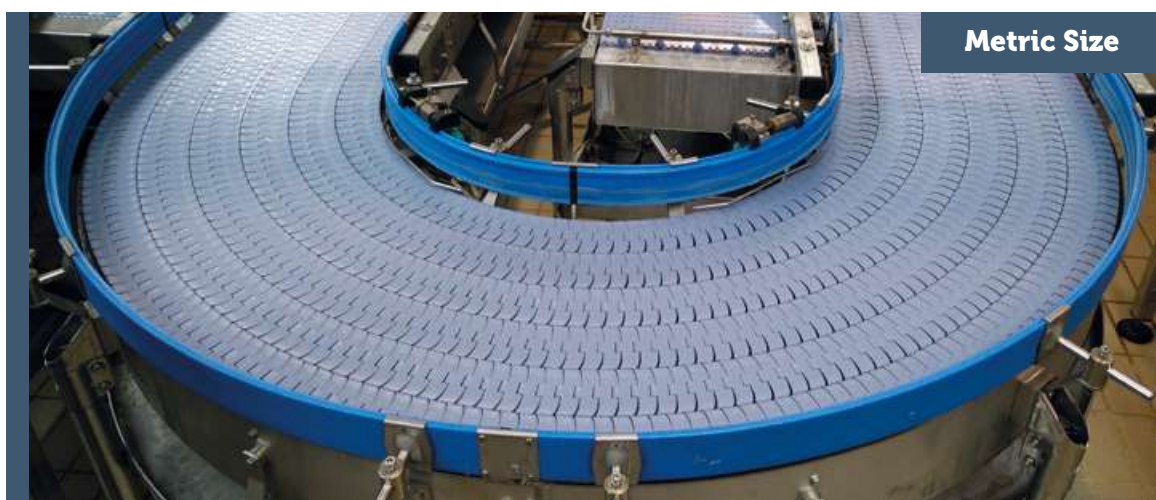

Metric Size

Movex®

260 M FT
260 M FG
260 TAB

261 M FT
261 TAB

260 M FT

Catena curvilinea
Sideflexing belt/chain / Kurvengängige Mattenkette



MAGNETIC SYSTEM

Delivery: **Easy** **Standard**

Pins: Ferritic SS | Backflex radius min.: 130 mm

25.4mm
PITCH


Metric Size

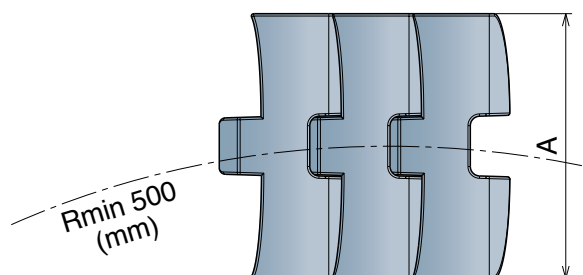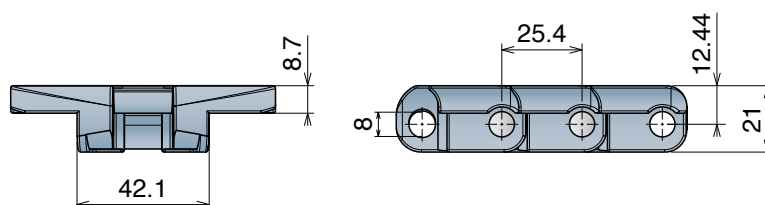

Advantages:

- Heavy duty
- 20% Reduced gap link
- 95% Closed surface

SAMPLE BOX

Art.-Nr. **999800**

120 links



pg. 328-329



pg. 141-147



pg. 651>661

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
11510103	LFA 260 M FT K330	83,8	1,75	2000	500	LFA
11510105	LFA 260 M FT K450	114,3	2,30			
11510303	MX 260 M FT K330	83,8	1,75	1600	500	MX
11510305	MX 260 M FT K450	114,3	2,30			
11513003	PFX 260 M FT K330	83,8	1,65	1600	500	PFX
11513005	PFX 260 M FT K450	114,3	2,20			
11511603	DKM 260 M FT K330	83,8	1,75	2000	500	DKM
11511605	DKM 260 M FT K450	114,3	2,30			
11512303	LFA 260 M FT K330	83,8	1,75	2000	500	LFB
11512305	LFA 260 M FT K450	114,3	2,30			

260 M FG

Tappeti modulari / Modular belts / Mattenketten

260 M FG

Catena curvilinea
Sideflexing belt/chain / Kurvengängige Mattenkette



MAGNETIC SYSTEM

Delivery: **Easy** **Standard**

Pins: Ferritic SS | Backflex radius min.: 130 mm

25.4 mm
PITCH

Metric Size

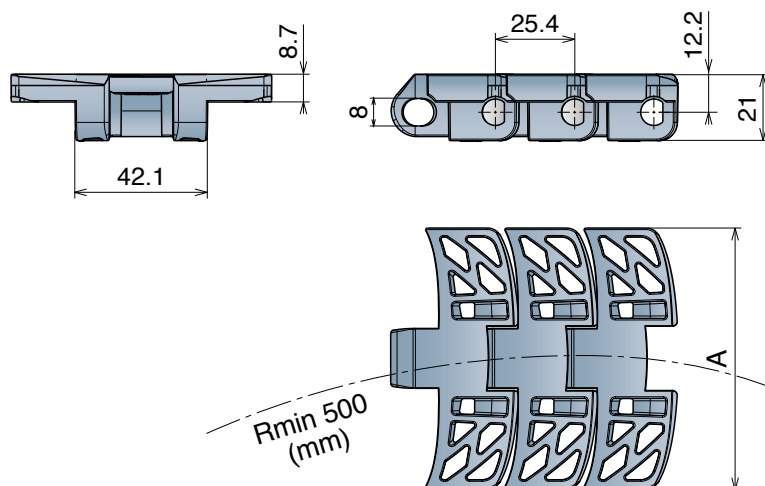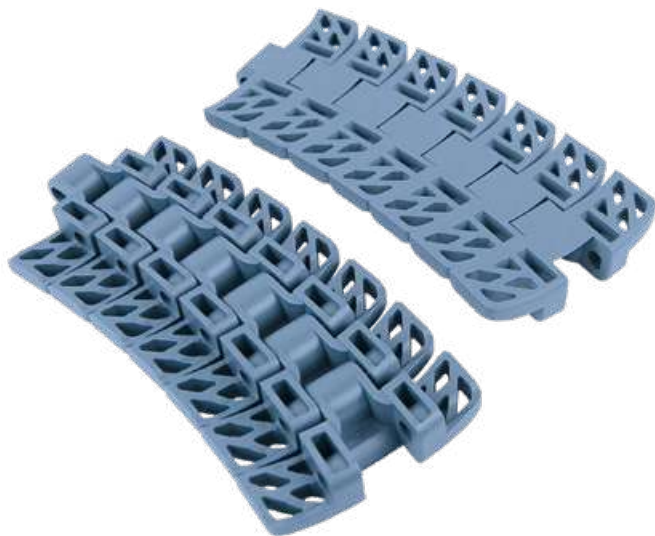

10 feet 3.048 m			
120 links	pg. 328-329	pg. 141-147	pg. 651>661

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
11540103	LFA 260 M FG K330	83,8	1,62	2000	500	LFA
11540105	LFA 260 M FG K450	114,3	2,13			
11540303	MX 260 M FG K330	83,8	1,62	1600	500	MX
11540305	MX 260 M FG K450	114,3	2,13			
11543003	PFX 260 M FG K330	83,8	1,52	1600	500	PFX
11543005	PFX 260 M FG K450	114,3	2,03			
11542303	LFB 260 M FG K330	83,8	1,62	2000	500	LFB
11542305	LFB 260 M FG K450	114,3	2,13			

260 TAB

Catena curvilinea
Sideflexing belt/chain / Kurvengängige Mattenkette


TAB SYSTEM

Delivery: **Easy** **Standard**

Pins: Ferritic SS | Backflex radius min.: 130 mm

25.4mm
PITCH

Metric Size

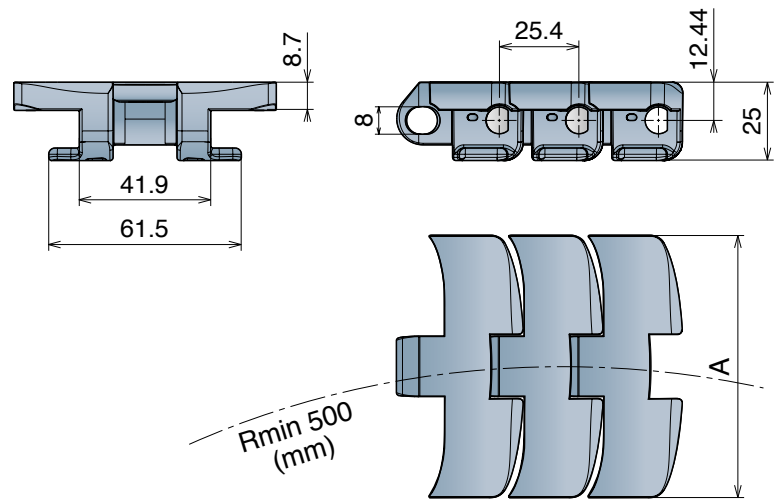

120 links



pg. 328-329



pg. 163



pg. 651>661

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
11520103	LFA 260 TAB K330	83,8	1,85	2000	500	LFA
11520105	LFA 260 TAB K450	114,3	2,00			
11520303	MX 260 TAB K330	83,8	1,85	1600	500	MX
11520305	MX 260 TAB K450	114,3	2,00			
11523003	PFX 260 TAB K330	83,8	1,75	1600	500	PFX
11523005	PFX 260 TAB K450	114,3	1,90			
11521603	DKM 260 TAB K330	83,8	1,85	2000	500	DKM
11521605	DKM 260 TAB K450	114,3	2,00			
11522303	LFB 260 TAB K330	83,8	1,85	2000	500	LFB
11522305	LFB 260 TAB K450	114,3	2,00			

261 M FT




Catena curvilinea
Sideflexing belt/chain / Kurvengängige Mattenkette

MAGNETIC SYSTEM

Delivery: **Easy** **Standard**

Pins: Ferritic SS

25.4 mm
PITCH

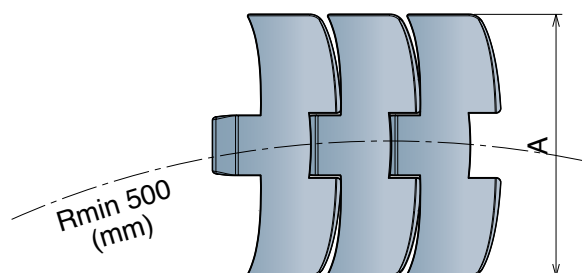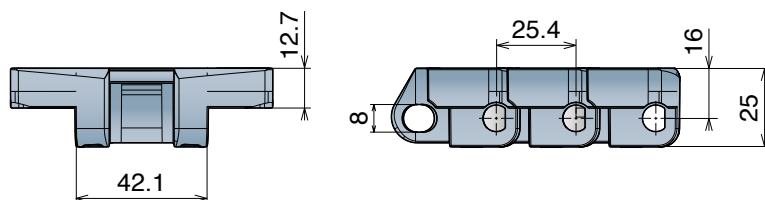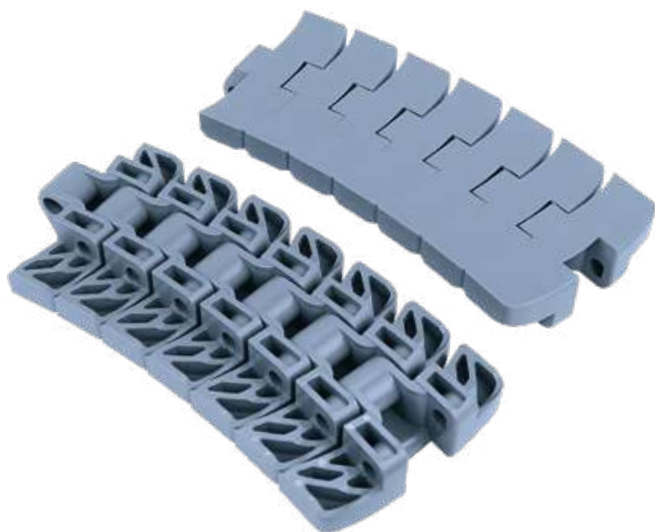

120 links



pg. 328-329



pg. 148-154



pg. 651>661

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
11530103	LFA 261 M FT K330	83,8	2,00	2000	500	LFA
11530105	LFA 261 M FT K450	114,3	2,52			
11530303	MX 261 M FT K330	83,8	2,00	1600	500	MX
11530305	MX 261 M FT K450	114,3	2,52			
11533003	PFX 261 M FT K330	83,8	2,00	1600	500	PFX
11533005	PFX 261 M FT K450	114,3	2,52			
11531603	DKM 261 M FT K330	83,8	2,00	2000	500	DKM
11531605	DKM 261 M FT K450	114,3	2,52			
11531703	MWX 261 M FT K330	83,8	2,16	2000	500	MWX
11531705	MWX 261 M FT K450	114,3	2,70			

261 TAB

Catena curvilinea
Sideflexing belt/chain / Kurvengängige Mattenkette


TAB SYSTEM

Delivery: **Easy** **Standard**

Pins: Ferritic SS

25.4 mm
PITCH

Metric Size

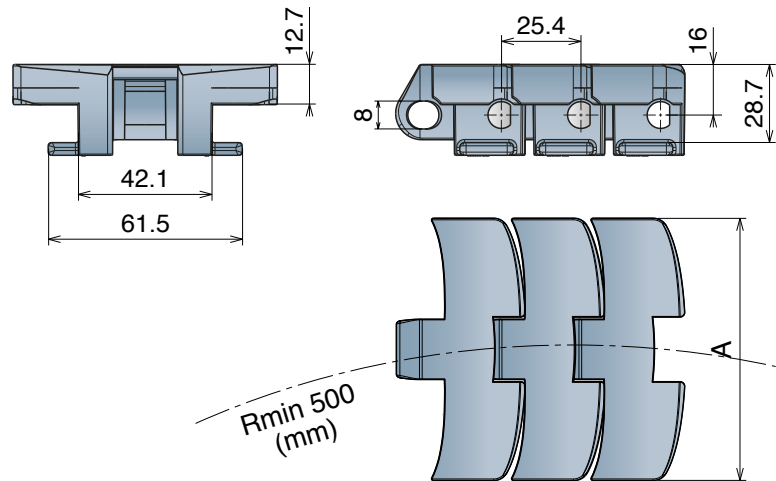
 10 feet
3.048 m
120 links

pg. 328-329

pg. 163



pg. 651 > 661

Article-Nr.	Ref.	A (Plate Width) mm	Weight kg/m	Max working load (N)	Sideflex radius mm	Material
11900103	LFA 261 TAB K330	83,8	2,00	2000	500	LFA
11900105	LFA 261 TAB K450	114,3	2,52			
11900303	MX 261 TAB K330	83,8	2,00	1600	500	MX
11900305	MX 261 TAB K450	114,3	2,52			
11903003	PFX 261 TAB K330	83,8	2,00	1600	500	PFX
11903005	PFX 261 TAB K450	114,3	2,52			
11901603	DKM 261 TAB K330	83,8	2,00	2000	500	DKM
11901605	DKM 261 TAB K450	114,3	2,52			
11901703	MWX 261 TAB K330	83,8	2,16	2000	500	MWX
11901705	MWX 261 TAB K450	114,3	2,70			

NoseBars

RANGE EXTENSION

Movex NoseBars improve the efficiency of your production line.



Small products are becoming a challenge when they have to be transferred from head-to-tail, especially when they don't have a flat base like cans and petaloid bottles.

This is becoming even more critical when the line capacity is pushed to the limit and speeds or operating hours could compromise the required efficiency.

Movex NoseBars are the best solution for a combination of short transfer and high performance.

Moreover, they will let your line:

- Running with limited maintenance
- Exceeding in performances
- Achieving high speeds and loads

Paying specific attention during the development as well as during the automated production, together with our constant quality control checks, we have reached these features which can be reflected to all Movex products.

Movex NoseBars are suitable for all applications and conditions. Made from super-performance **BluLub®**, for a reduced coefficient of friction, the smallest gaps are reached between the belts to assure a smooth and precise transfer.

Movex NoseBars are available in three different versions: standard, with rollers and with bearings. Specific the executions with rollers and bearings are ideal for high speed and/or high load applications.

Less friction, longer lifetime, less belt elongation and less maintenance are facts which makes the Movex NoseBars reliable and longlasting products.

Find out the best combination for your application with our modular belts and NoseBars in the selection chart at page 272.

Blulub®

Do you know what it is?

All Movex NoseBars are made with a compound developed by Movex, the **Blulub®**, a special high-performance material which contains the latest generation of solid lubricants.

The use of products made in **Blulub®** is designed for applications with limited lubrication, higher speeds and/or higher loads.

Blulub® requires less energy and with its lower coefficient of friction, improves the product stability and wear life of modular belts.

One piece

Custom made NoseBar, supplied in a single piece.

One piece is the patented system from Movex that reduces the required conveyor maintenance time drastically.

One piece is very quick to install and easy to clean!

More info at page 282>284

PATENTED



Movex®


All Movex **NoseBar** are made in **Blulub®**, with the latest generation of solid lubricants.

High precision machined part with reduced tolerances over nose radius and flatness.

Complete interchangeability between versions: Standard, with Bearings and with Rollers

Available in several widths to fit different modular belt series and sizes.

Provided with countersunk holes for a quick installation on the line and if required with grooves for positioners.

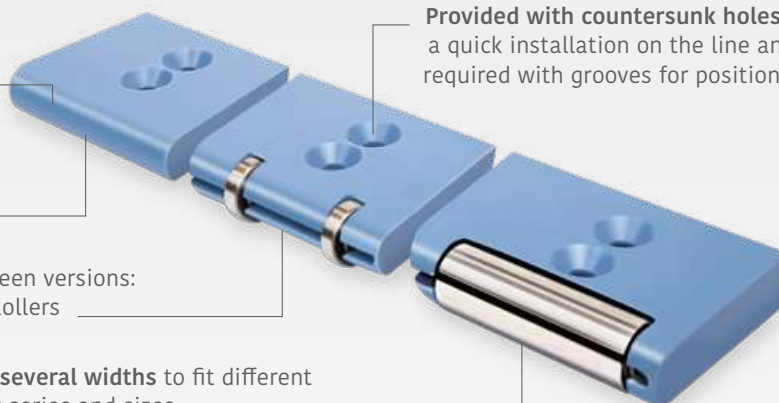

Three different options, fully interchangeable:



Standard

GENERAL APPLICATIONS

Static NoseBars with unique properties due the special Movex *BluLub®* compound are the ideal choice for any type of application, help improving the line efficiency, reducing dust and the frequency of maintenance.

- Available diameters: 6 / 19 / 22 mm
- Available also with grooves for positioners
- Can be machined to width, according your needs



with Bearings

HIGH-SPEED APPLICATIONS

Dynamic NoseBars with Bearings help improving the line efficiency and grant a longer life compared to traditional ones, minimizing the coefficient of friction and generating less wear. The rotating chrome steel bearings create an improved situation specific for high-speed applications.

- Available diameters: 19 / 22 mm
- Available also with grooves for positioners
- Can be machined to width, according your needs








with Rollers

HIGH-LOAD APPLICATIONS


Dynamic NoseBars with Rollers and bearings are long-lasting component that increase the efficiency of the processing line. Thanks to its sturdy stainless steel rollers, they are also the ideal choice for heavy load applications or high abrasive working conditions like dusts, liquids, etc.

- Available diameter: 19 mm
- Available also with grooves for positioners (only for 521 FT)
- Can be machined to width, according your needs

NoseBar selection and Transfer lengths

Movex modular belts				Belt Pitch (mm)	Nosebar Ø (mm)	STANDARD	WITH BEARINGS	WITH ROLLERS
 510 FT				8	6	Pag 273	NOT APPLICABLE	NOT APPLICABLE
 520 FT	 520 HD FT	 520 FTT	 520 FG	12,7	19	Pag 273	Pag 277	Pag 280
 520 GT	 520 LBP	 520 PRO LBP	 520 M					
 521 FT				12,7	19	Pag 274	Pag 277	Pag 280
 522 HD FT	 522 HD OTB			12,7	19	Pag 274	Pag 278	Pag 281
 525 HD FT	 525 FTT	 525 HD FG	 525 HD GT	15	19	Pag 273	Pag 277	Pag 280
 530 FT	 530 FTT	 530 GT			15	Pag 275	Pag 278	Pag 281
 530 LBP				15	19	Pag 275	Pag 279	NOT APPLICABLE
 530 PRO LBP				15	19	Pag 276	Pag 279	NOT APPLICABLE

Standard and with bearings NoseBars are also available with a diameter of 22mm, contact your sales representative for more info.



		Modular belt - Type B													
		510 FT	520 HD FT	520 FG	521 FT	522 HD FT	525 HD FT	525 HD FG	530 FT	520 GT	525 HD GT	530 LBP	530 PRO LBP	520 PRO LBP	520 LBP
Modular belt - Type A	510 FT - H 6mm	22	31	31	31	31	31	31	31	33	33	33,5	33,5	38,5	41,5
	520 HD FT - H 8,7mm	31	40	40	40	40	40	40	40	42	42	43	43	48	51
	520 FG - H 8,7mm	31	40	40	40	40	40	40	40	42	42	43	43	48	51
	521 FT - H 8,7mm	31	40	40	40	40	40	40	40	42	42	43	43	48	51
	522 HD FT - H 8,7mm	31	40	40	40	40	40	40	40	42	42	43	43	48	51
	525 HD FT - H 8,7mm	31	40	40	40	40	40	40	40	42	42	43	43	48	51
	525 HD FG - H 8,7mm	31	40	40	40	40	40	40	40	42	42	43	43	48	51
	530 FT - H 8,7mm	31	40	40	40	40	40	40	40	42	42	43	43	48	51
	520 GT - H 10,7mm	33	42	42	42	42	42	42	42	44	44	45	45	50	53
	525 HD GT - H 10,7mm	33	42	42	42	42	42	42	42	44	44	45	45	50	53
	530 LBP - H 12,2mm	33,5	43	43	43	43	43	43	43	45	45	45	45	50	53
	530 PRO LBP - H 12,2mm	33,5	43	43	43	43	43	43	43	45	45	45	45	50	53
	520 PRO LBP - H 18mm	38,5	48	48	48	48	48	48	48	50	50	50	50	55	58
	520 LBP - H 20,7mm	41,5	51	51	51	51	51	51	51	53	53	53	53	58	61



NoseBars for 510 Series

Delivery: **Easy** **Standard**

Article-Nr. K (mm)

22818 76,2 (3')

22819 152,4 (6')

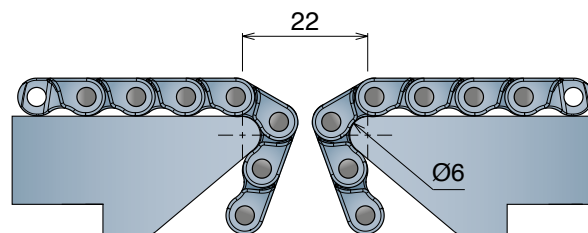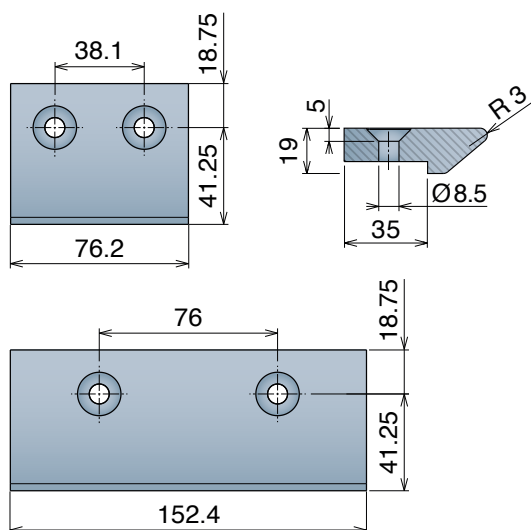

NoseBars for 520/525 Series


Delivery: **Easy** **Standard**

Article-Nr. K (mm)

22801 85

22802 170


22803 255

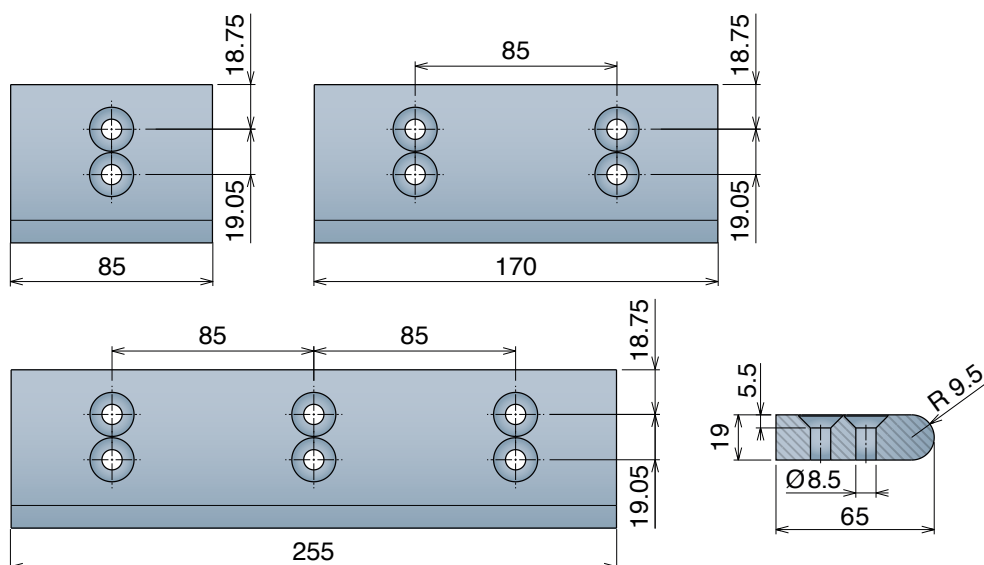

Version B - With 1 Positioner | Version C - With 2 Positioners


Article-Nr. K (mm)

22807 85

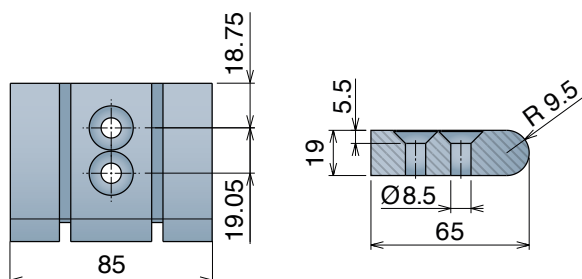


NoseBars for 521 Series

Article-Nr.	K (mm)
22840	190,5 (7.5')

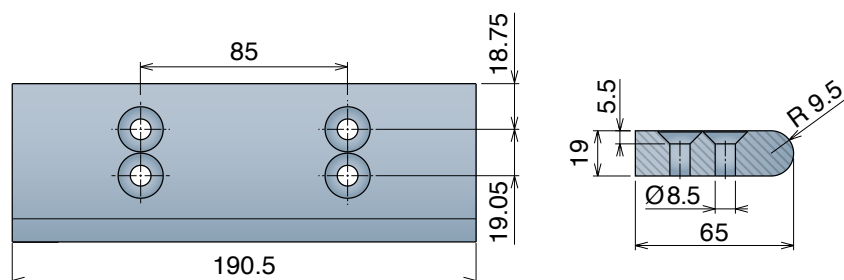


Version B - With 1 Positioner | Version C - With 2 Positioners

Article-Nr.	K (mm)
22843	190,5 (7.5')

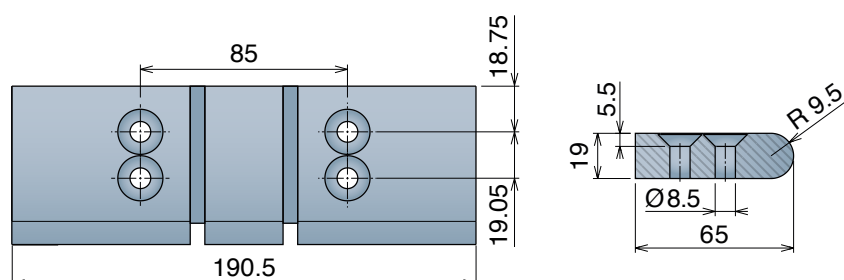

NoseBars for 522 HD Series


Delivery:	Easy	Standard	Article-Nr.	K (mm)	Type
-----------	------	----------	-------------	--------	------

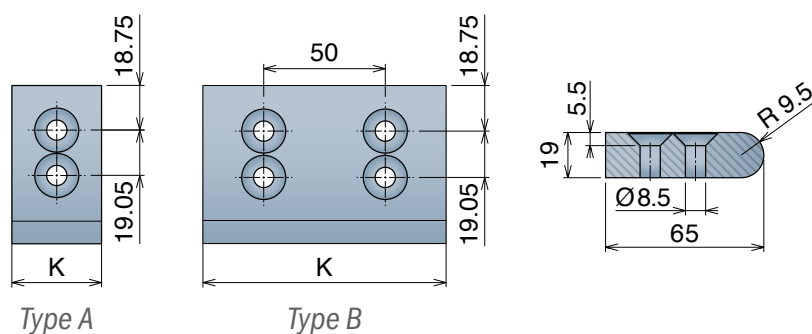

Article-Nr.	K (mm)	Type
22820	29	A
22821	34	A
22822	37	A
22823	51 (2')	A
22808	76,2 (3')	A
22824	100	B

Version B - With 1 Positioner | Version C - With 2 Positioners

Article-Nr.	K (mm)
22820P	29
22821P	34
22822P	37
22823P	51 (2')
22808P	76,2 (3')

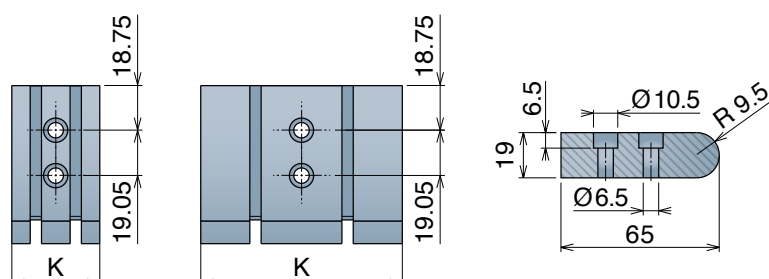

NoseBars for 530 Series


(LBP version excluded)

Delivery: **Easy** **Standard**

Article-Nr. K (mm)

22808 76,2 (3')


22809 152,4 (6')

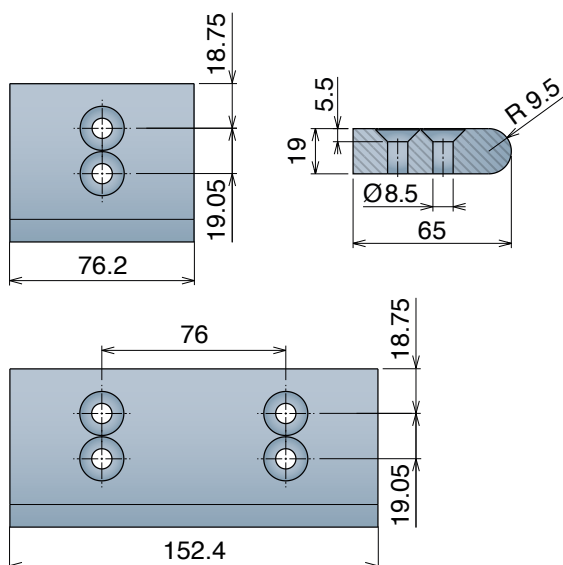

NoseBar for 530 LBP


Article-Nr. K (mm)

22867 152,4 (6')

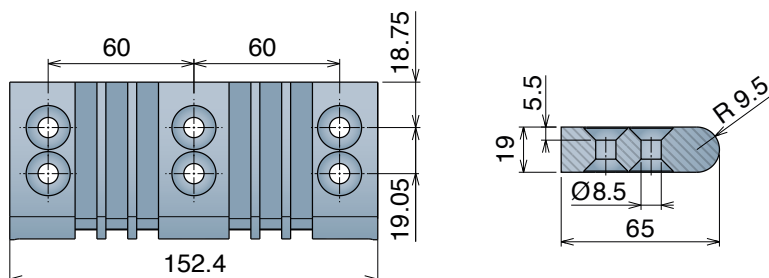


How to use Movex 530 LBP double-face Nosebar

Idler Side

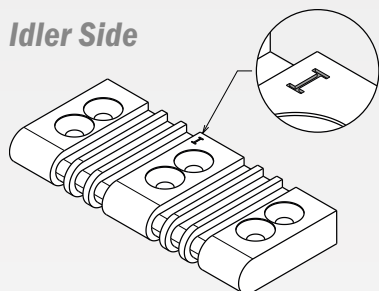


Active Side

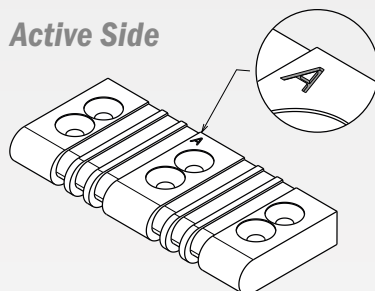

Movex 530 LBP Nosebars are special Nosebars, specific to optimize the characteristics of this particular belt. It can be installed in two different ways: **idler side** and **active side**, depending if you want to obtain the accumulation or acceleration effects of the goods. In both modalities the same Nosebar is used: it simply needs to be installed on one side rather than the other. One face of the Nosebar is set up for the accumulation function and the opposite one for the acceleration function.


$V = X$



Idler System (sectional view)

The nosebar allows the belts rollers to remain raised above the surface, free to roll.


$V = 2X$



Active System (sectional view)

The nosebar allows the belt rollers to touch the surface, increasing the speed of the goods.


NoseBar for 530 PRO LBP

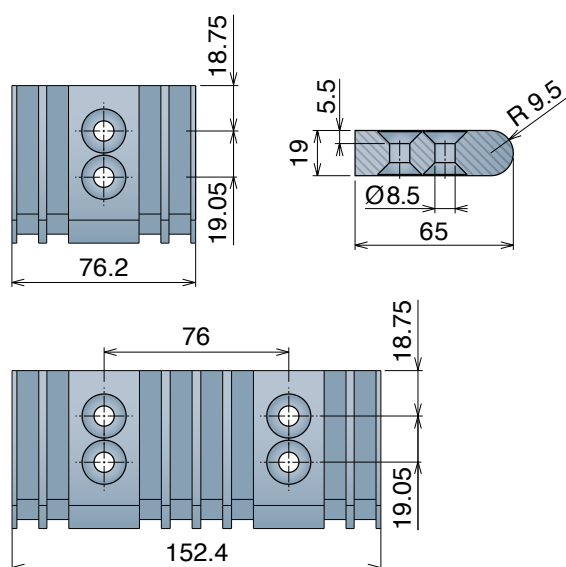


Article-Nr.	K (mm)
22865	76,2 (3')
22866	152,4 (6')

How to use Movex 530 Pro LBP double-face Nosebar

Idler Side

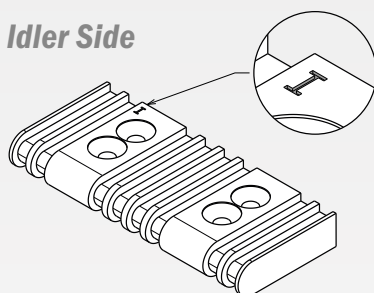


Active Side

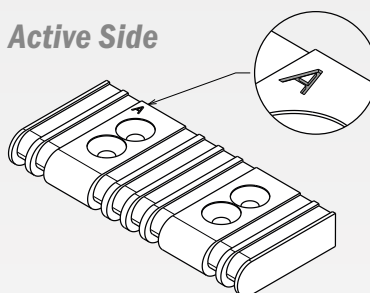

Movex 530 Pro LBP Nosebars are special Nosebars, specific to optimize the characteristics of this particular belt. It can be installed in two different ways: **idler side** and **active side**, depending if you want to obtain the accumulation or acceleration effects of the goods. In both modalities the same Nosebar is used: it simply needs to be installed on one side rather than the other. One face of the Nosebar is set up for the accumulation function and the opposite one for the acceleration function.


$$V = X$$



Idler System (sectional view)

The nosebar allows the belts rollers to remain raised above the surface, free to roll.

$$V = 2X$$




Active System (sectional view)

The nosebar allows the belt rollers to touch the surface, increasing the speed of the goods.


NoseBars with Bearings for 520/525 Series

Delivery: **Easy** **Standard**

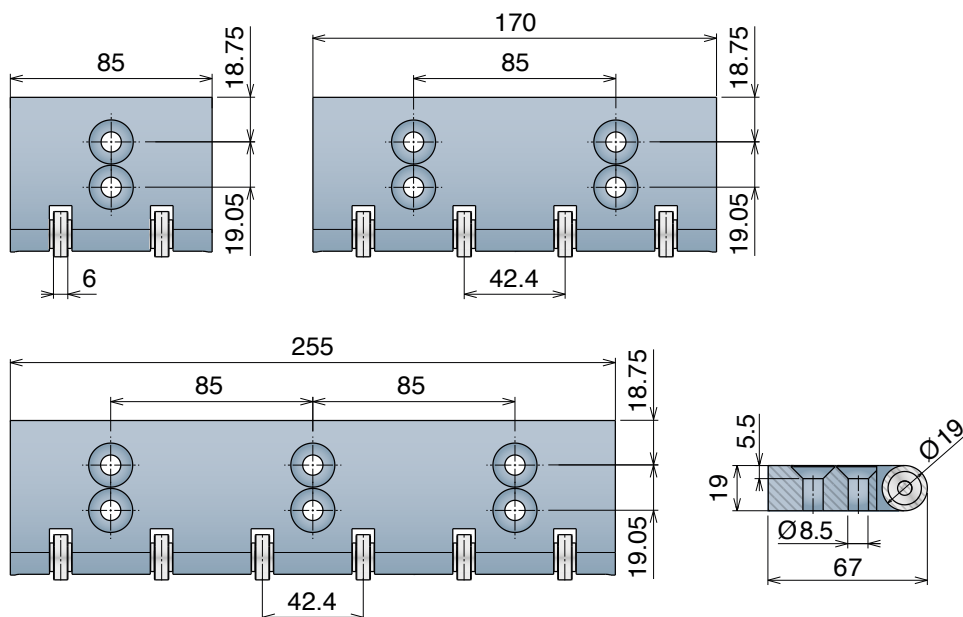


Article-Nr.	K (mm)
22811	85
22812	170
22813	255

Version B - With 1 Positioner | Version C - With 2 Positioners

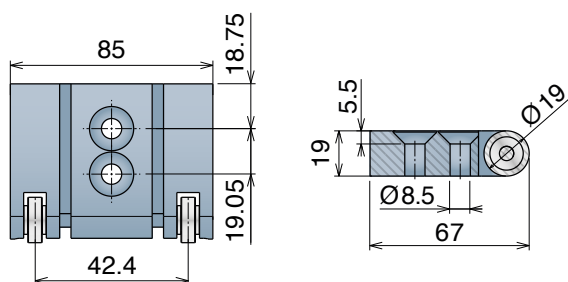


Article-Nr.	K (mm)
22817	85

NoseBars with Bearings for 521 Series

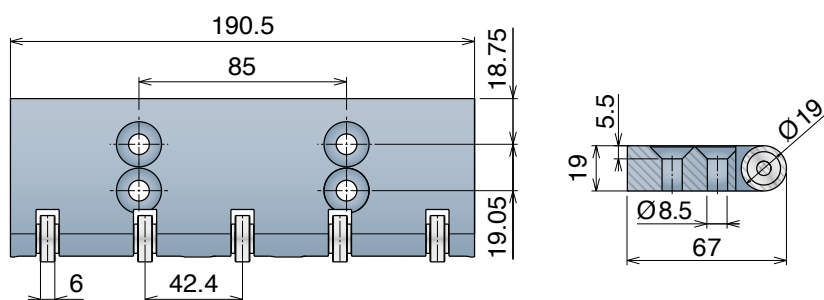

Article-Nr.	K (mm)
22842C	190.5 (7.5')


Version B - With 1 Positioner | Version C - With 2 Positioners

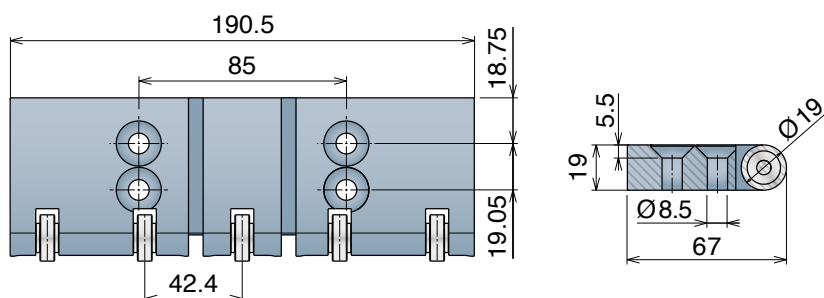

Article-Nr.	K (mm)
22845C	190.5 (7.5')


NoseBars with Bearings for 522 HD Series

Delivery: **Easy** **Standard**

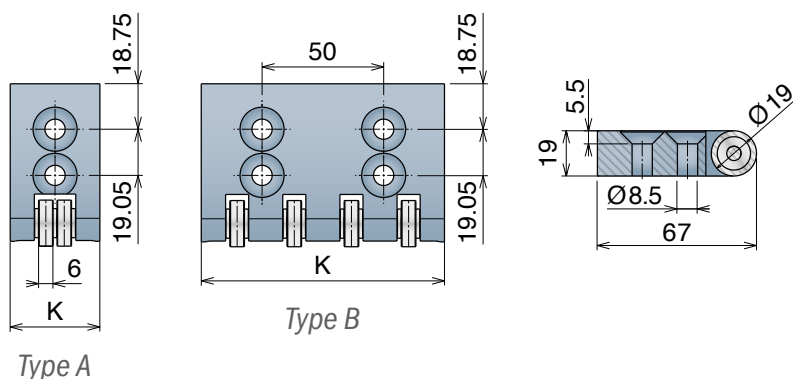

Article-Nr.	K (mm)	Type
22850	29	A
22851	34	A
22852	37	A
22853	51 (2')	A
22861	76,2 (3')	A
22854	100	B

Version B - With 1 Positioner | Version C - With 2 Positioners

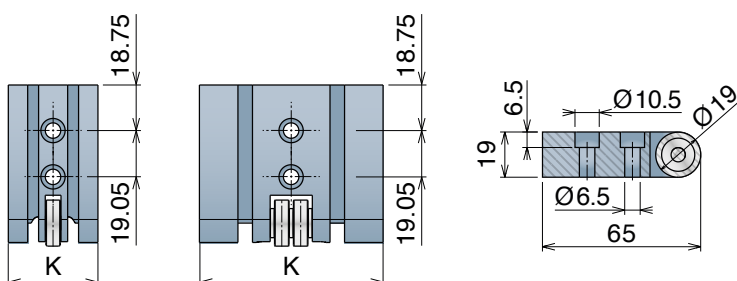


Article-Nr.	K (mm)
22850P	29
22851P	34
22852P	37
22853P	51 (2')
22861P	76,2 (3')

NoseBars with Bearings for 530 Series


(LBP version excluded)

Delivery: **Easy** **Standard**

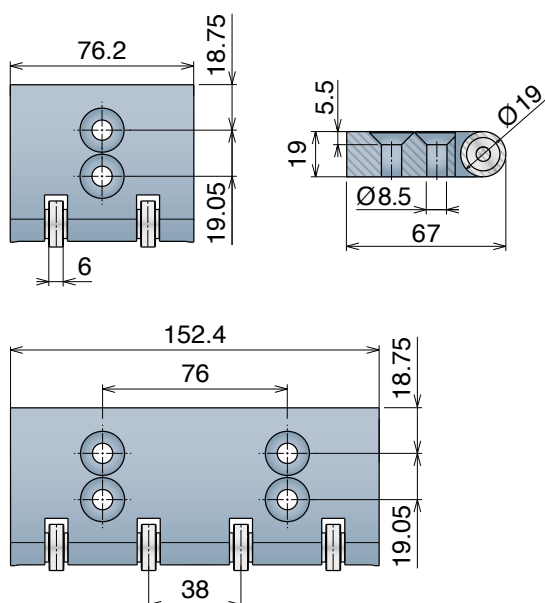

Article-Nr.	K (mm)
22861	76,2 (3')
22862	152,4 (6')

NoseBar with Bearings for 530 LBP

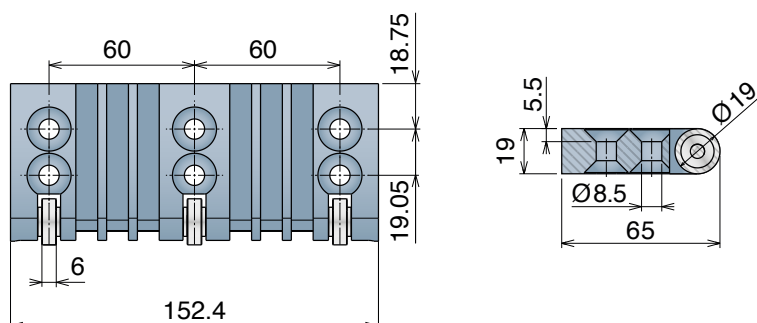


Article-Nr. K (mm)

22868 152,4 (6')

NoseBars with Bearings for 530 PRO LBP

Delivery: **Easy** **Standard**

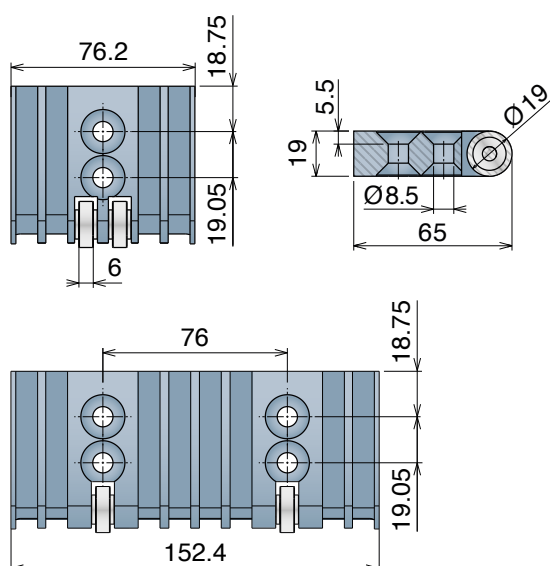


Article-Nr. K (mm)

22863 76,2 (3')


22864 152,4 (6')

How to use Movex 530 LBP and Pro LBP double-face Nosebar

Idler Side

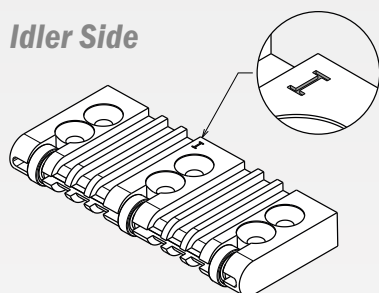


Active Side

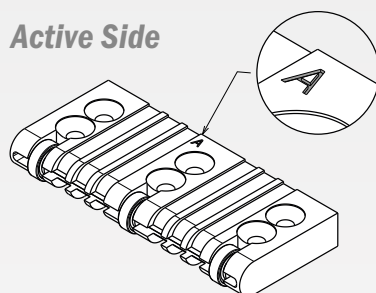

Movex 530 LBP and Pro LBP Nosebars are special Nosebars, specific to optimize the characteristics of this particular belt. It can be installed in two different ways: **idler side** and **active side**, depending if you want to obtain the accumulation or acceleration effects of the goods. In both modalities the same Nosebar is used: it simply needs to be installed on one side rather than the other. One face of the Nosebar is set up for the accumulation function and the opposite one for the acceleration function.


$V = X$



Idler System (sectional view)

The nosebar allows the belts rollers to remain raised above the surface, free to roll.

$V = 2X$




Active System (sectional view)

The nosebar allows the belt rollers to touch the surface, increasing the speed of the goods.

NoseBars with Rollers for 520/525 HD Series

Delivery: **Easy** **Standard**


Article-Nr. K (mm)

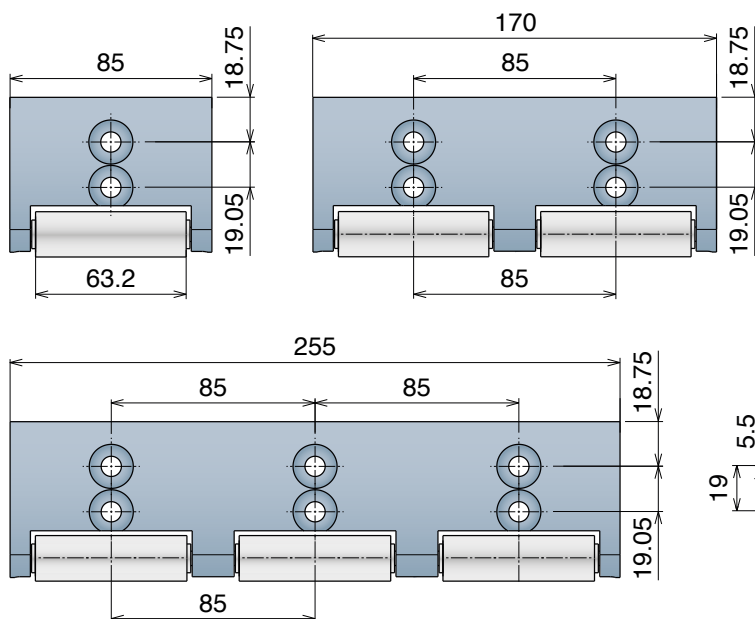

22814	85
22815	170
22816	255

NoseBars with Rollers for 521 Series


Article-Nr. K (mm)

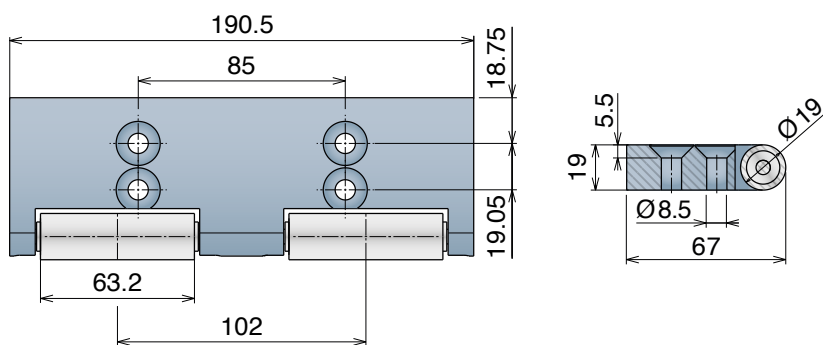

22841B	190.5 (7.5')
--------	--------------


Version B - With 1 Positioner | Version C - With 2 Positioners

Article-Nr. K (mm)

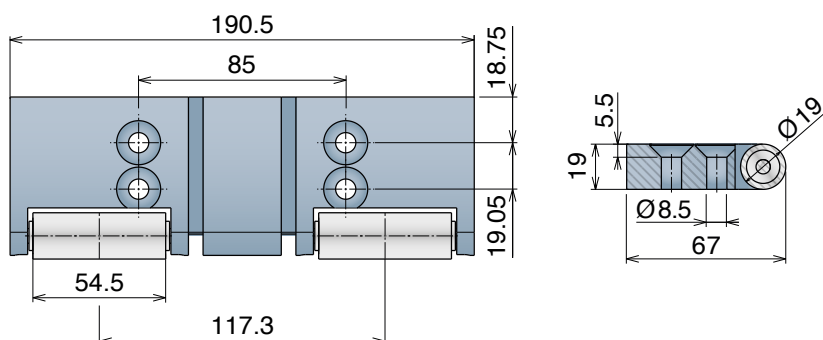

22844B	190.5 (7.5')
--------	--------------


NoseBars with Rollers for 522 HD Series

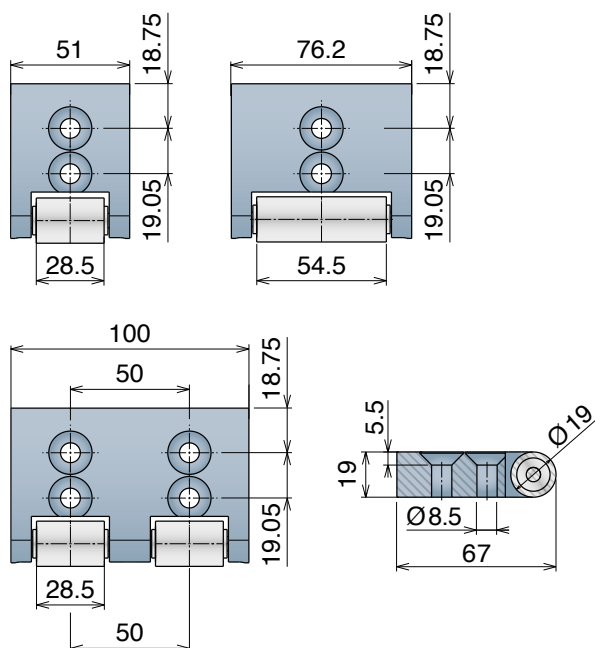

Article-Nr.	K (mm)
22823B	51 (2')
22808B	76,2 (3')
22824B	100

NoseBars with Rollers for 530 Series

(LBP version excluded)

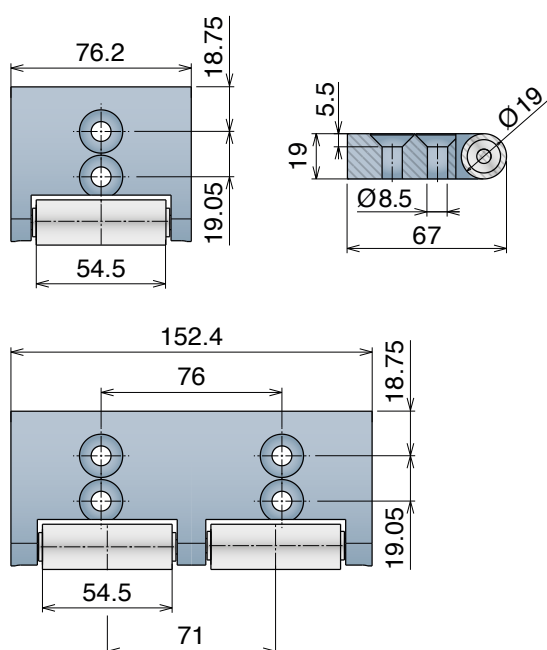

Article-Nr.	K (mm)
22808B	76,2 (3')
22809B	152,4 (6')


One piece Standard

IDEAL FOR GENERAL APPLICATIONS


The custom made Movex Nosebars supplied in a single piece to perfectly match your needs.



One piece is a machined-to-width nosebar patented by Movex that greatly reduces the time necessary for the conveyor maintenance: being a single piece, of the required width, it is quick to install, easy to clean and offer a better level of hygiene.



Max width available = 1500 mm

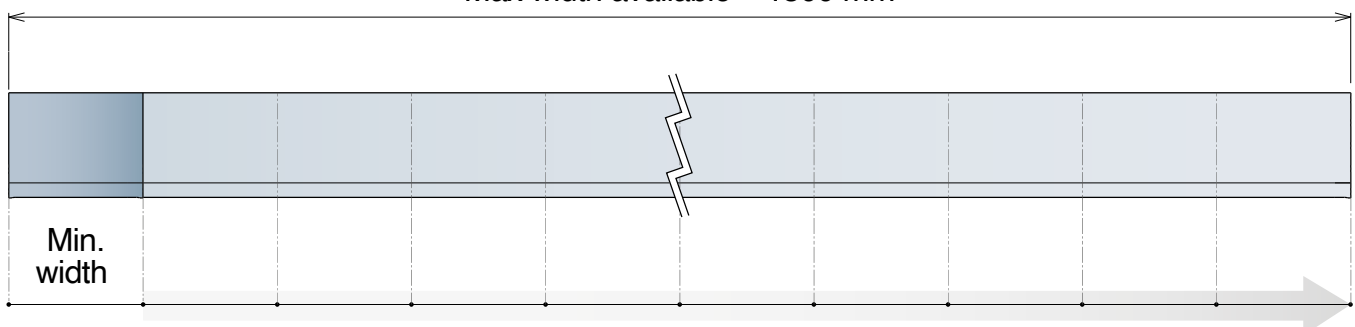

520/525 Series

Min width:
85 mm

Article-Nr.	K (mm)
2280425	425
2280510	510
2280595	595
2280680	680
2280765	765
2280850	850

522 HD Series

Min width:
50 mm

Article-Nr.	K (mm)
2280200	200
2280250	250
2280300	300
2280350	350
2280400	400
2280450	450

530 Series

Min width:
3 inch

Article-Nr.	K (mm)
2280457	457,2
2280533	533,4
2280610	609,6
2280686	685,8
2280762	762
2280838	838,2

Available different widths and with holes on request.

Advantages:

- Single piece
- Less fixing point
- Hygienical concept
- Easy to install
- Improved strength
- Fast maintenance
- Easy clean
- Reduced friction

One piece with Bearings

RANGE EXTENSION


PATENTED

IDEAL FOR HIGH-SPEED APPLICATIONS


The custom made Movex Nosebars supplied in a single piece to perfectly match your needs.



One piece with Bearings is a machined-to-width nosebar patented by Movex that greatly reduces the time necessary for the conveyor maintenance: being a single piece with bearings, of the required width, it is quick to install, easy to clean, offers a better level of hygiene and is ideal for high-speed applications.



Max width available = 1500 mm

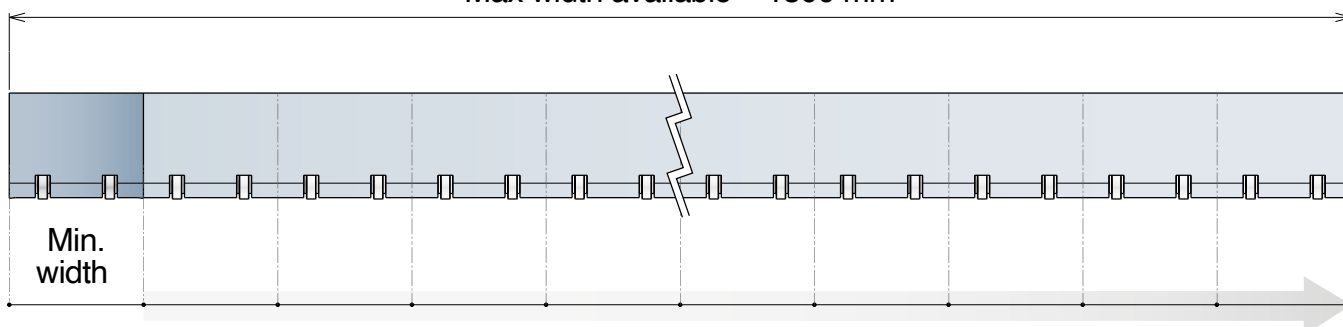

520/525 Series

Min width:
85 mm

Article-Nr.	K (mm)
2280425C	425
2280510C	510
2280595C	595
2280680C	680
2280765C	765
2280850C	850

522 HD Series

Min width:
50 mm

Article-Nr.	K (mm)
2280200C	200
2280250C	250
2280300C	300
2280350C	350
2280400C	400
2280450C	450

530 Series

Min width:
3 inch

Article-Nr.	K (mm)
2280457C	457,2
2280533C	533,4
2280610C	609,6
2280686C	685,8
2280762C	762
2280838C	838,2

Available different widths and with holes on request.

Advantages:

- Single piece
- Less fixing point
- Hygienical concept
- Easy to install
- Improved strength
- Fast maintenance
- Easy clean
- Reduced friction


One piece with Rollers

IDEAL FOR HIGH-LOAD APPLICATIONS


The custom made Movex Nosebars supplied in a single piece to perfectly match your needs.



One piece with Rollers and bearings is a machined-to-width nosebar patented by Movex that greatly reduces the time necessary for the conveyor maintenance: being a single piece with Rollers, of the required width, it is quick to install, easy to clean, offers a better level of hygiene and is ideal for heavy-load applications.



Max width available = 1500 mm

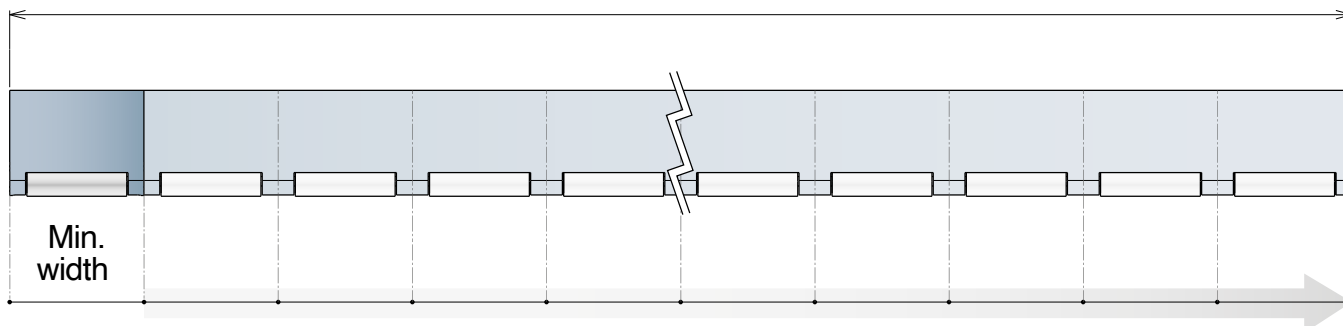

520/525 Series

Min width:
85 mm

Article-Nr.	K (mm)
2280425B	425
2280510B	510
2280595B	595
2280680B	680
2280765B	765
2280850B	850

522 HD Series

Min width:
50 mm

Article-Nr.	K (mm)
2280200B	200
2280250B	250
2280300B	300
2280350B	350
2280400B	400
2280450B	450

530 Series


Min width:
3 inch

Article-Nr.	K (mm)
2280457B	457,2
2280533B	533,4
2280610B	609,6
2280686B	685,8
2280762B	762
2280838B	838,2

Available different widths and with holes on request.

Advantages:

- Single piece
- Less fixing point
- Hygienical concept
- Easy to install
- Improved strength
- Fast maintenance
- Easy clean
- Reduced friction

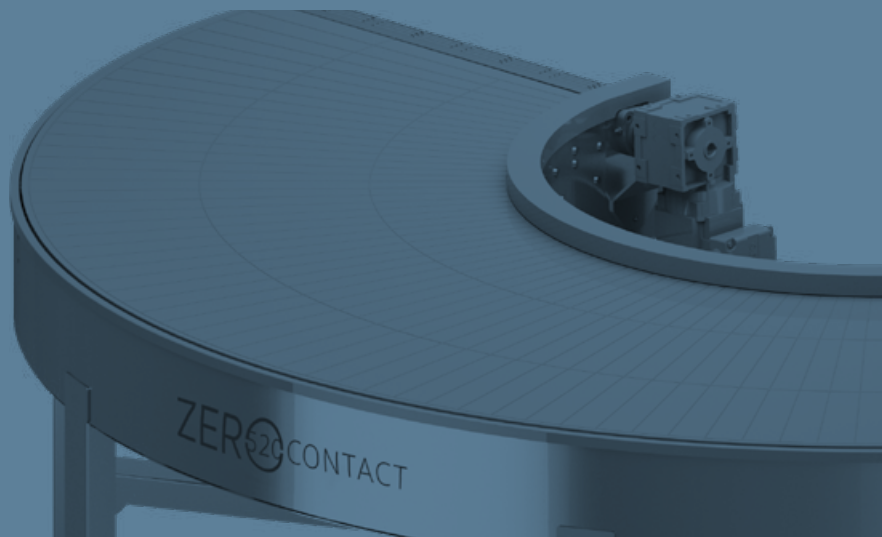

ZEROCONTACT
CURVE CONVEYOR

Pag 286/287



ZEROCONTACT
CURVE CONVEYOR

Pag 288/289



**TWO TRACKS
VERSION**

ZEROCONTACT
CURVE CONVEYOR

Pag 290/291



ZEROCONTACT
CURVE CONVEYOR

Pag 292/293

Accessories - Floor support



ZEROCONTACT
STANDARD, **PRO** & **S**

Pag 294

Accessories - Gearmotors



ZEROCONTACT
STANDARD, **PRO** & **S**

Pag 295



ZEROATP
ACTIVE TRANSFER PLATE

Pag 296/297



ZEROATP
ACTIVE TRANSFER PLATE

Pag 298/300



553 SORTER+
MULTIDIRECTIONAL CONVEYOR

Pag 301 > 304


**Accessories - Floor support
and Gearmotors**



553 SORTER+
FOR ALL VERSIONS AVAILABLE

Pag 305

**Accessories - Photocells
and guides**



553 SORTER+
FOR ALL VERSIONS AVAILABLE

Pag 306




QUOTE MODULES
FOR ALL MODULAR SOLUTIONS

Pag 307 > 310

ZERO CONTACT

CURVE CONVEYOR

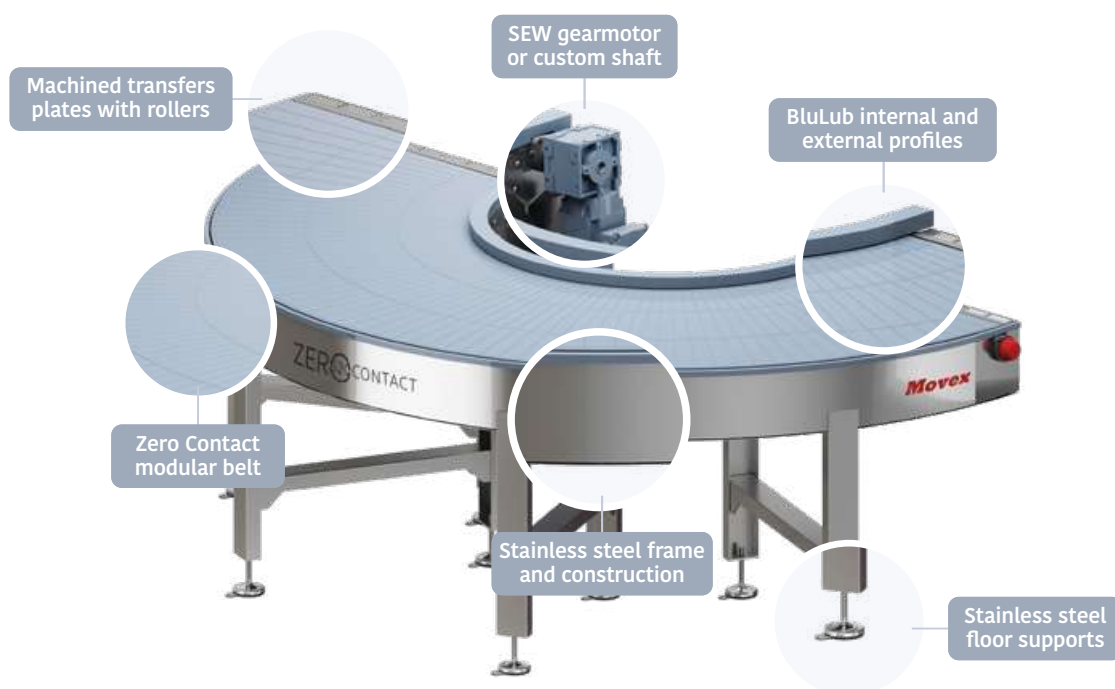

Product use

Zero Contact™ curve conveyor is available in different widths with a closed-top surface capable of handling a variety of package sizes, types and configurations including delicate products and applications found on shrink wrappers.

Zero Contact™ is designed to be used for the transport of various sized parts, is suitable for food and beverage industry thanks to the FDA approval, and helps reducing energy consumption and improving the line efficiency. It can be easily connected to existing layout.



INNER RADIUS 600mm ÷ 2000mm

BELT WIDTH 200mm ÷ 1600mm

MATERIAL OF MODULES Acetal (POM)

COLOR OF MODULES Pigeon Blue (RAL 5014)

PINS PBT White

PIN LOCK Clips

FRAME Stainless steel

TEMPERATURE RANGE

Dry: -40°C÷80°C Wet: -40°C ÷65°C

(Dry:-40°F ÷ 176°F Wet: -40°F ÷ 149°F)

MAX. WORKING LOAD

13.500 N/m belt width


CURVE ANGLE 15° ÷ 360°

OPEN AREA 0%


CURVES RANGE

Angle 90°

Left Version **CS**



CD Right Version




Width	Version	R _i 600mm	R _i 800mm	R _i 1000mm	R _i 1200mm	R _i 1400mm	R _i 1600mm	R _i 1800mm	R _i 2000mm
200mm	RIGHT	W02R06G090-CD	W02R08G090-CD	W02R10G090-CD	W02R12G090-CD	W02R14G090-CD	W02R16G090-CD	W02R18G090-CD	W02R20G090-CD
	LEFT	W02R06G090-CS	W02R08G090-CS	W02R10G090-CS	W02R12G090-CS	W02R14G090-CS	W02R16G090-CS	W02R18G090-CS	W02R20G090-CS
400mm	RIGHT	W04R06G090-CD	W04R08G090-CD	W04R10G090-CD	W04R12G090-CD	W04R14G090-CD	W04R16G090-CD	W04R18G090-CD	-
	LEFT	W04R06G090-CS	W04R08G090-CS	W04R10G090-CS	W04R12G090-CS	W04R14G090-CS	W04R16G090-CS	W04R18G090-CS	-
600mm	RIGHT	W06R06G090-CD	W06R08G090-CD	W06R10G090-CD	W06R12G090-CD	W06R14G090-CD	W06R16G090-CD	-	-
	LEFT	W06R06G090-CS	W06R08G090-CS	W06R10G090-CS	W06R12G090-CS	W06R14G090-CS	W06R16G090-CS	-	-
800mm	RIGHT	W08R06G090-CD	W08R08G090-CD	W08R10G090-CD	W08R12G090-CD	W08R14G090-CD	-	-	-
	LEFT	W08R06G090-CS	W08R08G090-CS	W08R10G090-CS	W08R12G090-CS	W08R14G090-CS	-	-	-
1000mm	RIGHT	W10R06G090-CD	W10R08G090-CD	W10R10G090-CD	W10R12G090-CD	-	-	-	-
	LEFT	W10R06G090-CS	W10R08G090-CS	W10R10G090-CS	W10R12G090-CS	-	-	-	-
1200mm	RIGHT	W12R06G090-CD	W12R08G090-CD	W12R10G090-CD	-	-	-	-	-
	LEFT	W12R06G090-CS	W12R08G090-CS	W12R10G090-CS	-	-	-	-	-
1400mm	RIGHT	W14R06G090-CD	W14R08G090-CD	-	-	-	-	-	-
	LEFT	W14R06G090-CS	W14R08G090-CS	-	-	-	-	-	-
1600mm	RIGHT	W16R06G090-CD	-	-	-	-	-	-	-
	LEFT	W16R06G090-CS	-	-	-	-	-	-	-

These codes mean complete curve, except floor supports and gearmotor, if you need to include them please see page 294/295.


CURVES RANGE

Angle 180°

Left Version **CS**

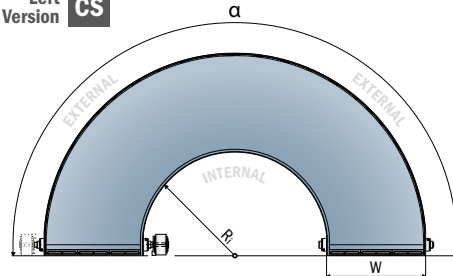

CD Right Version

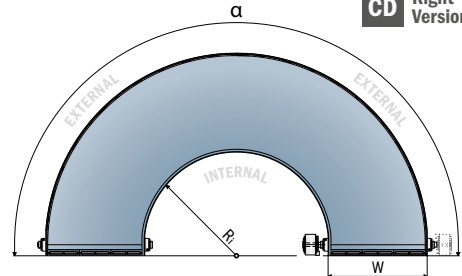


Width	Version	R _i 600mm	R _i 800mm	R _i 1000mm	R _i 1200mm	R _i 1400mm	R _i 1600mm	R _i 1800mm	R _i 2000mm
200mm	RIGHT	W02R06G180-CD	W02R08G180-CD	W02R10G180-CD	W02R12G180-CD	W02R14G180-CD	W02R16G180-CD	W02R18G180-CD	W02R20G180-CD
	LEFT	W02R06G180-CS	W02R08G180-CS	W02R10G180-CS	W02R12G180-CS	W02R14G180-CS	W02R16G180-CS	W02R18G180-CS	W02R20G180-CS
400mm	RIGHT	W04R06G180-CD	W04R08G180-CD	W04R10G180-CD	W04R12G180-CD	W04R14G180-CD	W04R16G180-CD	W04R18G180-CD	-
	LEFT	W04R06G180-CS	W04R08G180-CS	W04R10G180-CS	W04R12G180-CS	W04R14G180-CS	W04R16G180-CS	W04R18G180-CS	-
600mm	RIGHT	W06R06G180-CD	W06R08G180-CD	W06R10G180-CD	W06R12G180-CD	W06R14G180-CD	W06R16G180-CD	-	-
	LEFT	W06R06G180-CS	W06R08G180-CS	W06R10G180-CS	W06R12G180-CS	W06R14G180-CS	W06R16G180-CS	-	-
800mm	RIGHT	W08R06G180-CD	W08R08G180-CD	W08R10G180-CD	W08R12G180-CD	W08R14G180-CD	-	-	-
	LEFT	W08R06G180-CS	W08R08G180-CS	W08R10G180-CS	W08R12G180-CS	W08R14G180-CS	-	-	-
1000mm	RIGHT	W10R06G180-CD	W10R08G180-CD	W10R10G180-CD	W10R12G180-CD	-	-	-	-
	LEFT	W10R06G180-CS	W10R08G180-CS	W10R10G180-CS	W10R12G180-CS	-	-	-	-
1200mm	RIGHT	W12R06G180-CD	W12R08G180-CD	W12R10G180-CD	-	-	-	-	-
	LEFT	W12R06G180-CS	W12R08G180-CS	W12R10G180-CS	-	-	-	-	-
1400mm	RIGHT	W14R06G180-CD	W14R08G180-CD	-	-	-	-	-	-
	LEFT	W14R06G180-CS	W14R08G180-CS	-	-	-	-	-	-
1600mm	RIGHT	W16R06G180-CD	-	-	-	-	-	-	-
	LEFT	W16R06G180-CS	-	-	-	-	-	-	-

These codes mean complete curve, except floor supports and gearmotor, if you need to include them please see page 294/295.

NEW

ZERO^{PRO}CONTACT

CURVE CONVEYOR

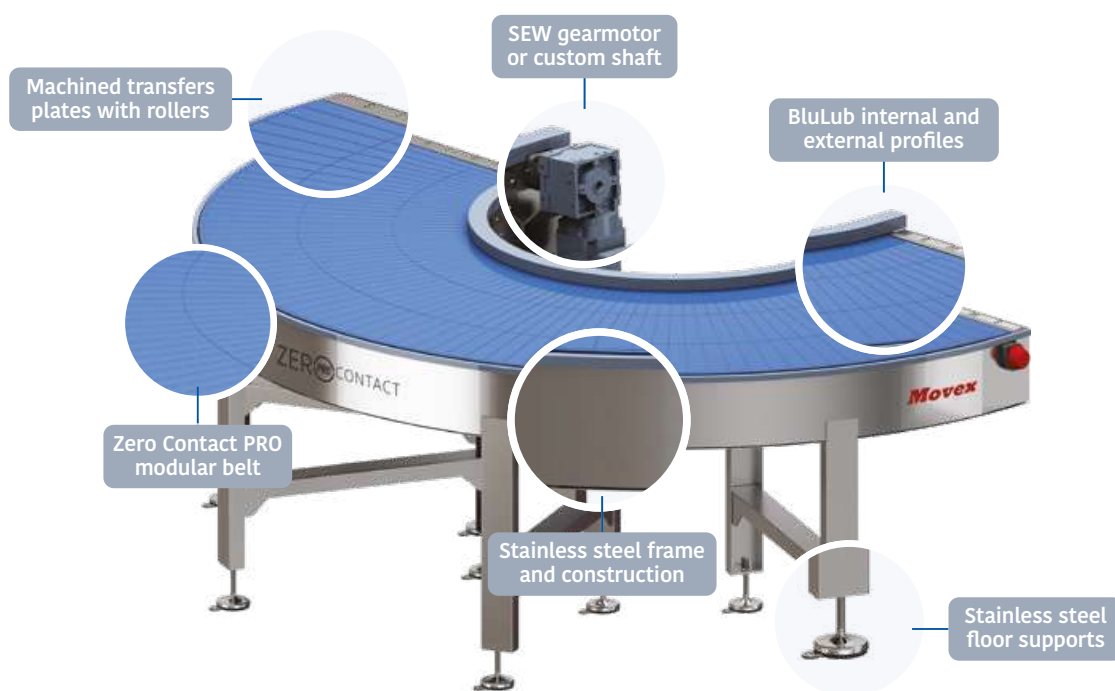

Product use

Zero Contact™ PRO is the right choice for heavy duty applications with high abrasive conditions, like sand, salt as well as production of tiles, bricks and cement production or applications where speeds and loads result very high.

Zero Contact™ PRO is designed with different dimension and features, so to guarantee higher performance for hostile environments:



The belt in Polyamide glass fiber reinforced, more resistant to high wear conditions



The rods in stainless steel and fixed by using grub screws guarantee high loads



INNER RADIUS 586mm ÷ 1541mm

BELT WIDTH 249mm ÷ 1034mm

MATERIAL OF MODULES Polyamide glass fiber reinforced (PA)

COLOR OF MODULES Dark Pigeon Blue (RAL 5017)

PINS Stainless steel

PIN LOCK Stainless steel grub screws

FRAME Stainless steel

TEMPERATURE RANGE

Dry: -30°C ÷ 100°C Wet: n.a.
(Dry: -22°F ÷ 212°F Wet: n.a.)

MAX. WORKING LOAD

19.000 N/m belt width


CURVE ANGLE 15° ÷ 360°

OPEN AREA 0%


CURVES RANGE

Angle 90°

Left Version **CS**



CD Right Version




Width	Version	R _i 586mm	R _i 756mm	R _i 1011mm	R _i 1031mm	R _i 1116mm	R _i 1201mm	R _i 1286mm	R _i 1456mm	R _i 1541mm
249mm	RIGHT	-	-	-	W91R94G090-CD	-	-	W91R97G090-CD	-	-
	LEFT	-	-	-	W91R94G090-CS	-	-	W91R97G090-CS	-	-
269mm	RIGHT	-	W92R92G090-CD	W92R93G090-CD	-	-	-	-	-	-
	LEFT	-	W92R92G090-CS	W92R93G090-CS	-	-	-	-	-	-
419mm	RIGHT	-	-	-	W93R94G090-CD	-	W93R96G090-CD	-	W93R98G090-CD	-
	LEFT	-	-	-	W93R94G090-CS	-	W93R96G090-CS	-	W93R98G090-CS	-
439mm	RIGHT	W94R91G090-CD	W94R92G090-CD	W94R93G090-CD	-	-	-	-	-	-
	LEFT	W94R91G090-CS	W94R92G090-CS	W94R93G090-CS	-	-	-	-	-	-
504mm	RIGHT	-	-	-	-	W95R95G090-CD	-	W95R97G090-CD	-	W95R99G090-CD
	LEFT	-	-	-	-	W95R95G090-CS	-	W95R97G090-CS	-	W95R99G090-CS
524mm	RIGHT	W96R91G090-CD	W96R92G090-CD	W96R93G090-CD	-	-	-	-	-	-
	LEFT	W96R91G090-CS	W96R92G090-CS	W96R93G090-CS	-	-	-	-	-	-
864mm	RIGHT	W97R91G090-CD	W97R92G090-CD	W97R93G090-CD	-	-	-	-	These codes mean complete curve, except floor supports and gearmotor, if you need to include them please see page 294/295.	
	LEFT	W97R91G090-CS	W97R92G090-CS	W97R93G090-CS	-	-	-	-		
1034mm	RIGHT	W98R91G090-CD	W98R92G090-CD	W98R93G090-CD	-	-	-	-		
	LEFT	W98R91G090-CS	W98R92G090-CS	W98R93G090-CS	-	-	-	-		


CURVES RANGE

Angle 180°

Left Version **CS**

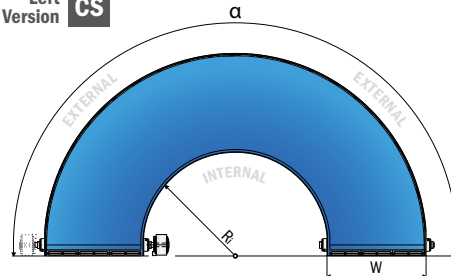

CD Right Version

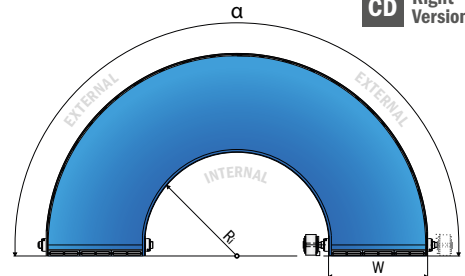

Width	Version	R _i 586mm	R _i 756mm	R _i 1011mm	R _i 1031mm	R _i 1116mm	R _i 1201mm	R _i 1286mm	R _i 1456mm	R _i 1541mm
249mm	RIGHT	-	-	-	W91R94G180-CD	-	-	W91R97G180-CD	-	-
	LEFT	-	-	-	W91R94G180-CS	-	-	W91R97G180-CS	-	-
269mm	RIGHT	-	W92R92G180-CD	W92R93G180-CD	-	-	-	-	-	-
	LEFT	-	W92R92G180-CS	W92R93G180-CS	-	-	-	-	-	-
419mm	RIGHT	-	-	-	W93R94G180-CD	-	W93R96G180-CD	-	W93R98G180-CD	-
	LEFT	-	-	-	W93R94G180-CS	-	W93R96G180-CS	-	W93R98G180-CS	-
439mm	RIGHT	W94R91G180-CD	W94R92G180-CD	W94R93G180-CD	-	-	-	-	-	-
	LEFT	W94R91G180-CS	W94R92G180-CS	W94R93G180-CS	-	-	-	-	-	-
504mm	RIGHT	-	-	-	-	W95R95G180-CD	-	W95R97G180-CD	-	W95R99G180-CD
	LEFT	-	-	-	-	W95R95G180-CS	-	W95R97G180-CS	-	W95R99G180-CS
524mm	RIGHT	W96R91G180-CD	W96R92G180-CD	W96R93G180-CD	-	-	-	-	-	-
	LEFT	W96R91G180-CS	W96R92G180-CS	W96R93G180-CS	-	-	-	-	-	-
864mm	RIGHT	W97R91G180-CD	W97R92G180-CD	W97R93G180-CD	-	-	-	-	These codes mean complete curve, except floor supports and gearmotor, if you need to include them please see page 294/295.	
	LEFT	W97R91G180-CS	W97R92G180-CS	W97R93G180-CS	-	-	-	-		
1034mm	RIGHT	W98R91G180-CD	W98R92G180-CD	W98R93G180-CD	-	-	-	-		
	LEFT	W98R91G180-CS	W98R92G180-CS	W98R93G180-CS	-	-	-	-		

NEW

ZERO^{PRO}CONTACT

CURVE CONVEYOR

TWO TRACKS VERSION

Product use

Zero Contact™ PRO is available also with “two-tracks” design; by keeping the same advantages of the Zero Contact™ PRO, with the Zero Contact™ PRO “two tracks” the maximum working load can be even higher thanks to the increased number of bearings. Moreover, the two belts can work at different / independent speeds and can be activated independently thanks to the double shaft.

The two belts can also be used for goods acceleration or can be also stopped independently, in case there is a double track infeed conveyor.



Separate belts offers the possibility of different/ higher speeds



2 different bearing-tracks guarantee extreme load, even at higher speed



INNER RADIUS 586mm ÷ 1011mm

BELT WIDTH 524mm ÷ 1034mm

MATERIAL OF MODULES Polyamide glass fiber reinforced (PA)

COLOR OF MODULES Dark Pigeon Blue (RAL 5017)

PINS Stainless steel

PIN LOCK Stainless steel grub screws

FRAME Stainless steel

TEMPERATURE RANGE

Dry: -30°C ÷ 100°C Wet: n.a.
(Dry: -22°F ÷ 212°F Wet: n.a.)

MAX. WORKING LOAD

21.000N/m belt width

CURVE ANGLE 15° ÷ 360°


OPEN AREA 0%

CURVES RANGE


Angle 90°

Double-Shaft

Left Version **CS**



CD Right Version



Width	Version	R _i 586mm	R _i 756mm	R _i 1011mm
524mm	RIGHT	-	W96R92G090-CD2	W96R93G090-CD2
	LEFT	-	W96R92G090-CS2	W96R93G090-CS2
864mm	RIGHT	W97R91G090-CD2	W97R92G090-CD2	W97R93G090-CD2
	LEFT	W97R91G090-CS2	W97R92G090-CS2	W97R93G090-CS2
1034mm	RIGHT	W98R91G090-CD2	W98R92G090-CD2	W98R93G090-CD2
	LEFT	W98R91G090-CS2	W98R92G090-CS2	W98R93G090-CS2

CODE	R1 - mm	W1 - mm	R2 - mm	W2 - mm	WTot - mm
W96R92G090-CD2 or CS2	756	269	1031	249	524
W96R93G090-CD2 or CS2	1011	269	1286	249	524
W97R91G090-CD2 or CS2	586	439	1031	419	864
W97R92G090-CD2 or CS2	756	439	1201	419	864
W97R93G090-CD2 or CS2	1011	439	1456	419	864
W98R91G090-CD2 or CS2	586	524	1116	504	1034
W98R92G090-CD2 or CS2	756	524	1286	504	1034
W98R93G090-CD2 or CS2	1011	524	1541	504	1034


The gap between the two belts is always 6mm. These codes mean complete curve, except floor supports and gearmotors, if you need to include them please see page 294/295.

CURVES RANGE


Angle 180°

Double-Shaft

Left Version **CS**

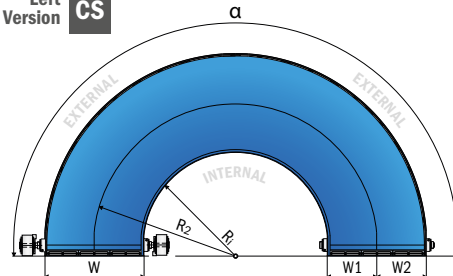

CD Right Version

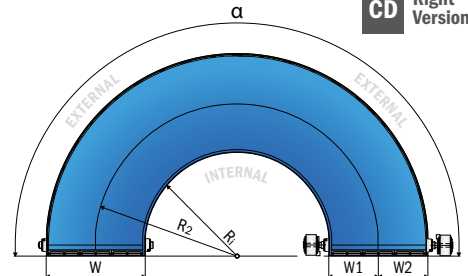

Width	Version	R _i 586mm	R _i 756mm	R _i 1011mm
524mm	RIGHT	-	W96R92G180-CD2	W96R93G180-CD2
	LEFT	-	W96R92G180-CS2	W96R93G180-CS2
864mm	RIGHT	W97R91G180-CD2	W97R92G180-CD2	W97R93G180-CD2
	LEFT	W97R91G180-CS2	W97R92G180-CS2	W97R93G180-CS2
1034mm	RIGHT	W98R91G180-CD2	W98R92G180-CD2	W98R93G180-CD2
	LEFT	W98R91G180-CS2	W98R92G180-CS2	W98R93G180-CS2


CODE	R1 - mm	W1 - mm	R2 - mm	W2 - mm	WTot - mm
W96R92G090-CD2 or CS2	756	269	1031	249	524
W96R93G090-CD2 or CS2	1011	269	1286	249	524
W97R91G090-CD2 or CS2	586	439	1031	419	864
W97R92G090-CD2 or CS2	756	439	1201	419	864
W97R93G090-CD2 or CS2	1011	439	1456	419	864
W98R91G090-CD2 or CS2	586	524	1116	504	1034
W98R92G090-CD2 or CS2	756	524	1286	504	1034
W98R93G090-CD2 or CS2	1011	524	1541	504	1034

The gap between the two belts is always 6mm. These codes mean complete curve, except floor supports and gearmotors, if you need to include them please see page 294/295.

NEW

ZERO⁵²⁰CONTACT^S

CURVE CONVEYOR

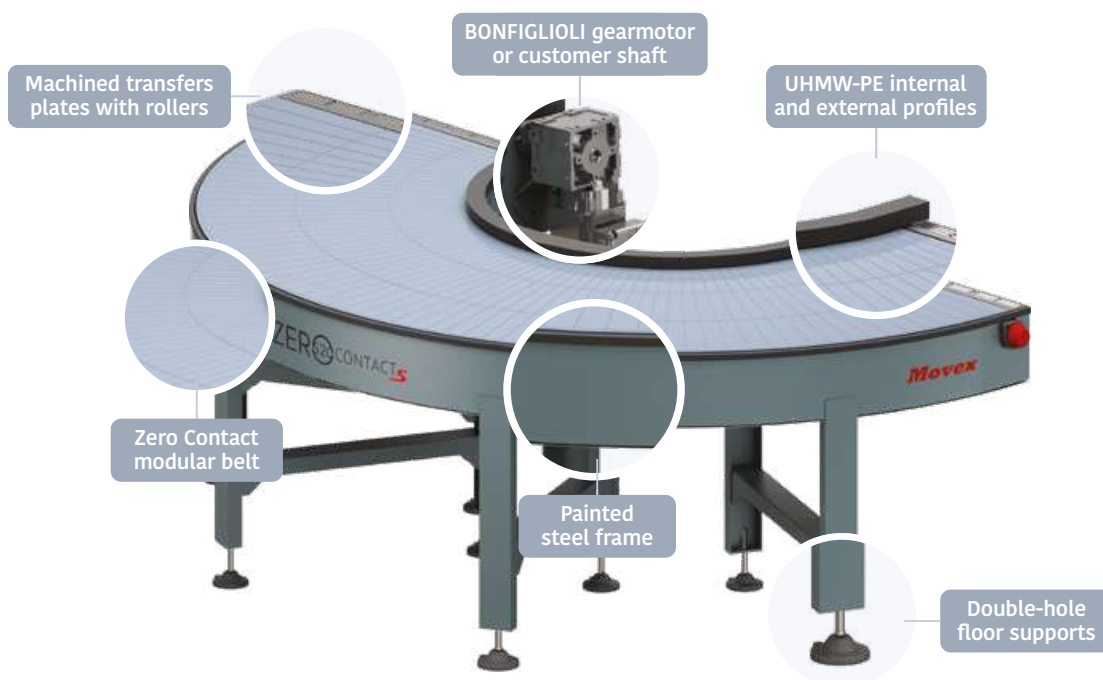

Product use

Zero Contact™ S is ideal for logistic / handling and distribution centers as well as can also be adopted for all types of product transportation, like wood or ceramic applications, dry conditions. Painted steel frames can be customized with every type of color.

Zero Contact™ S can be quickly installed into existing layout and fixed to the floor thanks to the leveling feet with double-floor fixation.



INNER RADIUS 600mm ÷ 2000mm

BELT WIDTH 200mm ÷ 1600mm

MATERIAL OF MODULES Acetal (POM)

COLOR OF MODULES Pigeon Blue (RAL 5014)

PINS PBT White

PIN LOCK Clips

FRAME Painted steel RAL 7031 or custom

TEMPERATURE RANGE

Dry: -40°C÷80°C Wet: n.a.

(Dry:-40°F ÷ 176°F Wet: n.a.)

MAX. WORKING LOAD

13.500 N/m belt width


CURVE ANGLE 15° ÷ 360°

OPEN AREA 0%


CURVES RANGE

Angle 90°

Left Version **CS**



CD Right Version




Width	Version	R _i 600mm	R _i 800mm	R _i 1000mm	R _i 1200mm	R _i 1400mm	R _i 1600mm	R _i 1800mm	R _i 2000mm
200mm	RIGHT	W02R06G090-CDS	W02R08G090-CDS	W02R10G090-CDS	W02R12G090-CDS	W02R14G090-CDS	W02R16G090-CDS	W02R18G090-CDS	W02R20G090-CDS
	LEFT	W02R06G090-CSS	W02R08G090-CSS	W02R10G090-CSS	W02R12G090-CSS	W02R14G090-CSS	W02R16G090-CSS	W02R18G090-CSS	W02R20G090-CSS
400mm	RIGHT	W04R06G090-CDS	W04R08G090-CDS	W04R10G090-CDS	W04R12G090-CDS	W04R14G090-CDS	W04R16G090-CDS	W04R18G090-CDS	-
	LEFT	W04R06G090-CSS	W04R08G090-CSS	W04R10G090-CSS	W04R12G090-CSS	W04R14G090-CSS	W04R16G090-CSS	W04R18G090-CSS	-
600mm	RIGHT	W06R06G090-CDS	W06R08G090-CDS	W06R10G090-CDS	W06R12G090-CDS	W06R14G090-CDS	W06R16G090-CDS	-	-
	LEFT	W06R06G090-CSS	W06R08G090-CSS	W06R10G090-CSS	W06R12G090-CSS	W06R14G090-CSS	W06R16G090-CSS	-	-
800mm	RIGHT	W08R06G090-CDS	W08R08G090-CDS	W08R10G090-CDS	W08R12G090-CDS	W08R14G090-CDS	-	-	-
	LEFT	W08R06G090-CSS	W08R08G090-CSS	W08R10G090-CSS	W08R12G090-CSS	W08R14G090-CSS	-	-	-
1000mm	RIGHT	W10R06G090-CDS	W10R08G090-CDS	W10R10G090-CDS	W10R12G090-CDS	-	-	-	-
	LEFT	W10R06G090-CSS	W10R08G090-CSS	W10R10G090-CSS	W10R12G090-CSS	-	-	-	-
1200mm	RIGHT	W12R06G090-CDS	W12R08G090-CDS	W12R10G090-CDS	-	-	-	-	-
	LEFT	W12R06G090-CSS	W12R08G090-CSS	W12R10G090-CSS	-	-	-	-	-
1400mm	RIGHT	W14R06G090-CDS	W14R08G090-CDS	-	-	-	-	-	-
	LEFT	W14R06G090-CSS	W14R08G090-CSS	-	-	-	-	-	-
1600mm	RIGHT	W16R06G090-CDS	-	-	-	-	-	-	-
	LEFT	W16R06G090-CSS	-	-	-	-	-	-	-

These codes mean complete curve, except floor supports and gearmotor, if you need to include them please see page 294/295.


CURVES RANGE

Angle 180°

Left Version **CS**

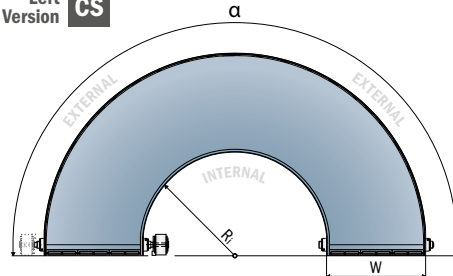

CD Right Version

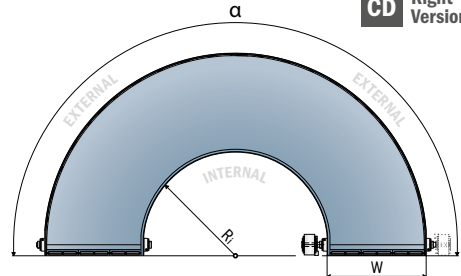


Width	Version	R _i 600mm	R _i 800mm	R _i 1000mm	R _i 1200mm	R _i 1400mm	R _i 1600mm	R _i 1800mm	R _i 2000mm
200mm	RIGHT	W02R06G180-CDS	W02R08G180-CDS	W02R10G180-CDS	W02R12G180-CDS	W02R14G180-CDS	W02R16G180-CDS	W02R18G180-CDS	W02R20G180-CDS
	LEFT	W02R06G180-CSS	W02R08G180-CSS	W02R10G180-CSS	W02R12G180-CSS	W02R14G180-CSS	W02R16G180-CSS	W02R18G180-CSS	W02R20G180-CSS
400mm	RIGHT	W04R06G180-CDS	W04R08G180-CDS	W04R10G180-CDS	W04R12G180-CDS	W04R14G180-CDS	W04R16G180-CDS	W04R18G180-CDS	-
	LEFT	W04R06G180-CSS	W04R08G180-CSS	W04R10G180-CSS	W04R12G180-CSS	W04R14G180-CSS	W04R16G180-CSS	W04R18G180-CSS	-
600mm	RIGHT	W06R06G180-CDS	W06R08G180-CDS	W06R10G180-CDS	W06R12G180-CDS	W06R14G180-CDS	W06R16G180-CDS	-	-
	LEFT	W06R06G180-CSS	W06R08G180-CSS	W06R10G180-CSS	W06R12G180-CSS	W06R14G180-CSS	W06R16G180-CSS	-	-
800mm	RIGHT	W08R06G180-CDS	W08R08G180-CDS	W08R10G180-CDS	W08R12G180-CDS	W08R14G180-CDS	-	-	-
	LEFT	W08R06G180-CSS	W08R08G180-CSS	W08R10G180-CSS	W08R12G180-CSS	W08R14G180-CSS	-	-	-
1000mm	RIGHT	W10R06G180-CDS	W10R08G180-CDS	W10R10G180-CDS	W10R12G180-CDS	-	-	-	-
	LEFT	W10R06G180-CSS	W10R08G180-CSS	W10R10G180-CSS	W10R12G180-CSS	-	-	-	-
1200mm	RIGHT	W12R06G180-CDS	W12R08G180-CDS	W12R10G180-CDS	-	-	-	-	-
	LEFT	W12R06G180-CSS	W12R08G180-CSS	W12R10G180-CSS	-	-	-	-	-
1400mm	RIGHT	W14R06G180-CDS	W14R08G180-CDS	-	-	-	-	-	-
	LEFT	W14R06G180-CSS	W14R08G180-CSS	-	-	-	-	-	-
1600mm	RIGHT	W16R06G180-CDS	-	-	-	-	-	-	-
	LEFT	W16R06G180-CSS	-	-	-	-	-	-	-

These codes mean complete curve, except floor supports and gearmotor, if you need to include them please see page 294/295.

Zero Contact™

Floor support



- Stainless steel AISI 304 or painted steel
- Single or double floor fixation levers
- Customizable height and specifications



Floor support for Zero Contact

Article Nr.	Curve Width - mm	Total Height - mm	Angle
W02G090H	200	1000	90°
W04G090H	400	1000	90°
W06G090H	600	1000	90°
W08G090H	800	1000	90°
W10G090H	1000	1000	90°
W12G090H	1200	1000	90°
W14G090H	1400	1000	90°
W16G090H	1600	1000	90°

Article Nr.	Curve Width - mm	Total Height - mm	Angle
W02G180H	200	1000	180°
W04G180H	400	1000	180°
W06G180H	600	1000	180°
W08G180H	800	1000	180°
W10G180H	1000	1000	180°
W12G180H	1200	1000	180°
W14G180H	1400	1000	180°
W16G180H	1600	1000	180°

Floor support for Zero Contact PRO

Article Nr.	Curve Width - mm	Total Height - mm	Angle
W91G090H	249	1000	90°
W92G090H	269	1000	90°
W93G090H	419	1000	90°
W94G090H	439	1000	90°
W95G090H	504	1000	90°
W96G090H	524	1000	90°
W97G090H	864	1000	90°
W98G090H	1034	1000	90°

Article Nr.	Curve Width - mm	Total Height - mm	Angle
W91G180H	249	1000	180°
W92G180H	269	1000	180°
W93G180H	419	1000	180°
W94G180H	439	1000	180°
W95G180H	504	1000	180°
W96G180H	524	1000	180°
W97G180H	864	1000	180°
W98G180H	1034	1000	180°

Floor support for Zero Contact S

Article Nr.	Curve Width - mm	Total Height - mm	Angle
W02G090HS	200	1000	90°
W04G090HS	400	1000	90°
W06G090HS	600	1000	90°
W08G090HS	800	1000	90°
W10G090HS	1000	1000	90°
W12G090HS	1200	1000	90°
W14G090HS	1400	1000	90°
W16G090HS	1600	1000	90°

Article Nr.	Curve Width - mm	Total Height - mm	Angle
W02G180HS	200	1000	180°
W04G180HS	400	1000	180°
W06G180HS	600	1000	180°
W08G180HS	800	1000	180°
W10G180HS	1000	1000	180°
W12G180HS	1200	1000	180°
W14G180HS	1400	1000	180°
W16G180HS	1600	1000	180°

For different heights or custom specification please contact your sales representative.

Zero Contact™ Gearmotor



SEW Gearmotors

- Foodgrade oil
- Power for 90° curve > 0,37kW – type WA30 DRN71M4
- Power for 180° curve > 0,55kW – type WA30 DRN80MK4
- Internal shaft position (no cable supplied)

Article Nr.	Power
M090-S/I	for 90° curve
M180-S/I	for 180° curve

Recommended for **Zero Contact™** and **Zero Contact™ PRO**

For different gearmotors please contact your sales representative



BONFIGLIOLI Gearmotors

- Power for 90° curve > 0,37kW – type BN 71B 4 B14 KW 0,37
- Power for 180° curve > 0,55kW – type BN 71C 4 B14 KW 0,55
- Internal shaft position (no cable supplied)

Article Nr.	Power
M090L-S/I	for 90° curve
M180L-S/I	for 180° curve


Recommended for **Zero Contact™ S**

For different gearmotors please contact your sales representative

NEW

ZERO⁵¹⁰ATP

ACTIVE TRANSFER PLATE

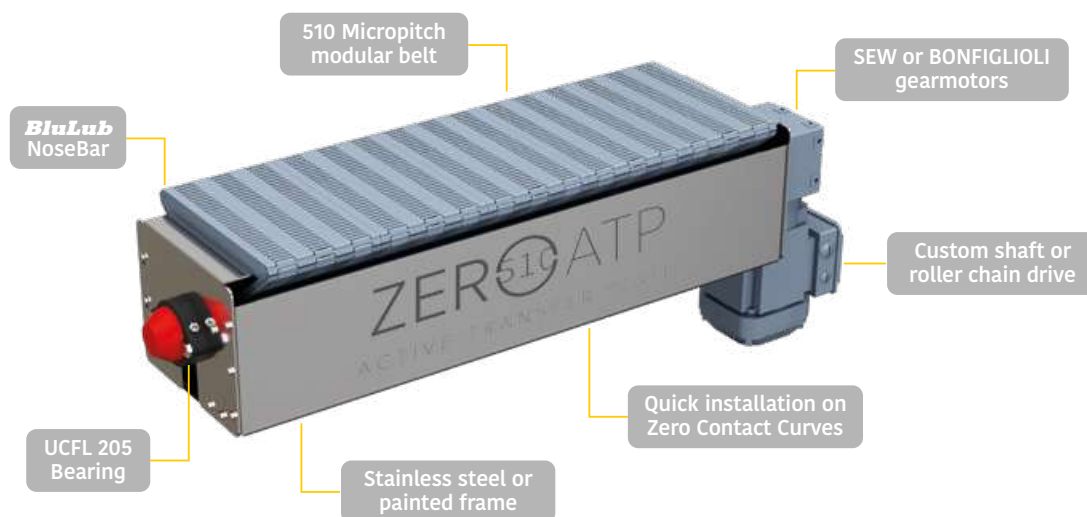


The **Zero ATP** is the perfect solution for small and light products, which hardly slide on standard solution. With the Active Transfer Plate Movex helps reducing downtimes and improving efficiency.

Zero ATP is a complete conveyor unit and supplied connected to the **Zero Contact**™ curve independently, so speed can be different than the curve itself, so able to accelerate or decelerate carried products.

Zero ATP Active Transfer Plates are equipped with Movex 510 FT micropitch belt.

A tensioning system is included.

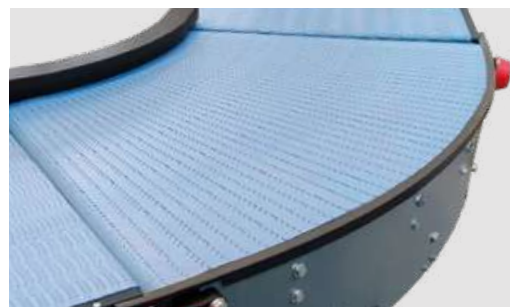

Main features

- Equipped with Movex 510 modular belt
- 8mm pitch, 3mm nose radius
- Available length 250mm and 500mm
- Connectable to Zero Contact curves



Longer Zero ATP available on request

Zero ATP for Zero Contact

Module length 250mm

Article Nr.	Curve Width - mm	Micropitch Width - mm
W02L10ATP	200	228,6
W04L10ATP	400	381
W06L10ATP	600	609,6
W08L10ATP	800	838,2
W10L10ATP	1000	990,6
W12L10ATP	1200	1219,2
W14L10ATP	1400	1447,8
W16L10ATP	1600	1600,2

Zero ATP for Zero Contact PRO

Module length 250mm

Article Nr.	Curve Width - mm	Micropitch Width - mm
W91L10ATP	249	228,6
W92L10ATP	269	228,6
W93L10ATP	419	381
W94L10ATP	439	457,2
W95L10ATP	504	533,4
W96L10ATP	524	533,4
W97L10ATP	864	838,2
W98L10ATP	1034	990,6

Zero ATP for Zero Contact S

Module length 250mm

Article Nr.	Curve Width - mm	Micropitch Width - mm
W02L10ATPS	200	228,6
W04L10ATPS	400	381
W06L10ATPS	600	609,6
W08L10ATPS	800	838,2
W10L10ATPS	1000	990,6
W12L10ATPS	1200	1219,2
W14L10ATPS	1400	1447,8
W16L10ATPS	1600	1600,2

SEW Gearmotor

- Foodgrade oil
- Power 0,18kW



Article Nr.	Power
MDT-1600	0,18kW

Module length 500mm

Article Nr.	Curve Width - mm	Micropitch Width - mm
W02L20ATP	200	228,6
W04L20ATP	400	381
W06L20ATP	600	609,6
W08L20ATP	800	838,2
W10L20ATP	1000	990,6
W12L20ATP	1200	1219,2
W14L20ATP	1400	1447,8
W16L20ATP	1600	1600,2

Module length 500mm

Article Nr.	Curve Width - mm	Micropitch Width - mm
W91L20ATP	249	228,6
W92L20ATP	269	228,6
W93L20ATP	419	381
W94L20ATP	439	457,2
W95L20ATP	504	533,4
W96L20ATP	524	533,4
W97L20ATP	864	838,2
W98L20ATP	1034	990,6

Module length 500mm

Article Nr.	Curve Width - mm	Micropitch Width - mm
W02L20ATPS	200	228,6
W04L20ATPS	400	381
W06L20ATPS	600	609,6
W08L20ATPS	800	838,2
W10L20ATPS	1000	990,6
W12L20ATPS	1200	1219,2
W14L20ATPS	1400	1447,8
W16L20ATPS	1600	1600,2

BONFIGLIOLI Gearmotor

- Power 0,18kW



Article Nr.	Power
MDTL-1600	0,18kW

For different gearmotors please contact your sales representative.


SEW and BONFIGLIOLI are believed to be the trademarks and/or trade names of their respective owners and are not owned or controlled by Movex S.p.A.

NEW

100%
GUARANTEED
TRANSFER!

ZERO^{PRO} ATP

ACTIVE TRANSFER PLATE

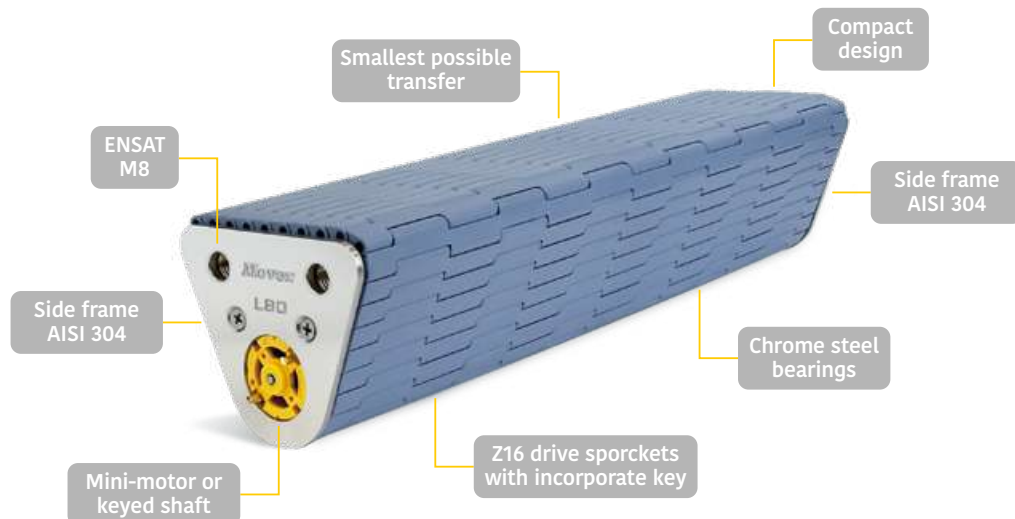


Product use

Zero ATP™ Pro equipped with micro-pitch 510 modular belt series, is the smallest Active Transfer Plate available on the market.

With its revolutionary compact shape, Zero ATP™ Pro is the right choice to connect different conveyors, guaranteeing a smooth product transfer, that can be easily integrated into existing lines by replacing traditional transfers, with limited structural work.

Zero ATP™ Pro can be provided with mini-motor or key shaft for a roller chain drive and it's a maintenance and tensioning free system.

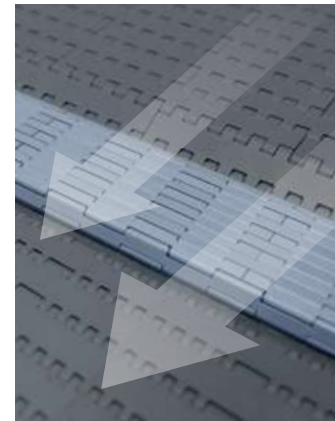

BELT SERIES 510 FT

BELT WIDTH 6in ÷ 24in (152,4mm ÷ 609,6mm)

BELT DIMENSIONS Pitch 8mm Thickness 6mm


MATERIAL OF MODULES LFA, MX and LFB

TRANSFER LENGTH 80mm or 150mm

TRANSMISSION Mini motor or Keyed shaft

MAX. WORKING LOAD 3.000 N/m belt width

SIMULTANEOUS TRANSPORT OF:

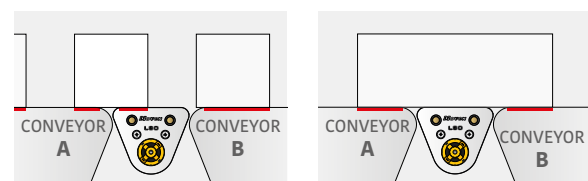

LIGHTWEIGHT & SMALL GOODS HIGH LOAD & BIG GOODS

Plug-in & Play solution | Maintenance free | Self-tensioning

Zero ATP™ Pro

Mini motor version



Mini-motor version

Includes a mini-motor assembled at the inside of the module.

Optional cover for motor connection



Article-Nr. 300601

Mini-motor features:

Supply voltage 6-15 V dc | Power Rating 7.85W

Max Torque 6539 g.cm.



Transfer length 80mm

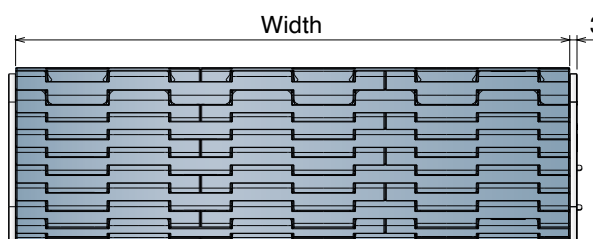

Series	Material	Width	Version
5336	*	0006	A
5336	*	0009	A
5336	*	0012	A
5336	*	0015	A
5336	*	0018	A
5336	*	0021	A
5336	*	0024	A

* Material			
LFA - Code 01 Low friction Acetal		MX - Code 03 Performance PBT	
		LFB - Code 23 Low friction Acetal	
Max w. load:	3000 N	Max w. load:	2700 N
Weight:	5,8 kg/m ²	Weight:	5,5 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey

Transfer length 150mm

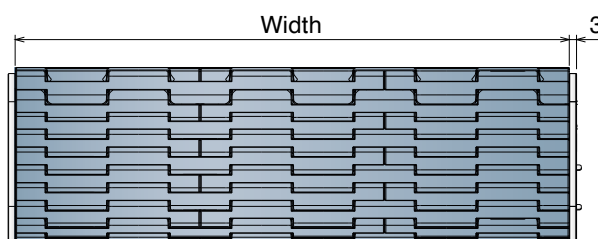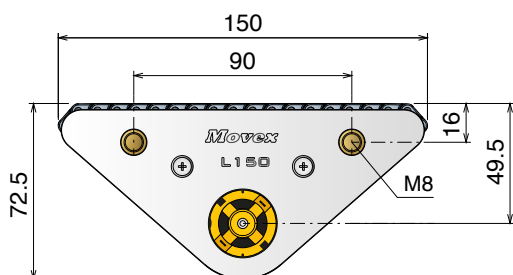

Series	Material	Width	Version
5338	*	0006	A
5338	*	0009	A
5338	*	0012	A
5338	*	0015	A
5338	*	0018	A
5338	*	0021	A
5338	*	0024	A

* Material			
LFA - Code 01 Low friction Acetal		MX - Code 03 Performance PBT	
		LFB - Code 23 Low friction Acetal	
Max w. load:	3000 N	Max w. load:	2700 N
Weight:	5,8 kg/m ²	Weight:	5,5 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey

For different configurations please contact your sales representative.

Zero ATP™ Pro



Keyed shaft version



Keyed shaft version

Includes a 15 mm shaft with standard key seat 5x5 for roller chain transmission.

Transfer length 80mm

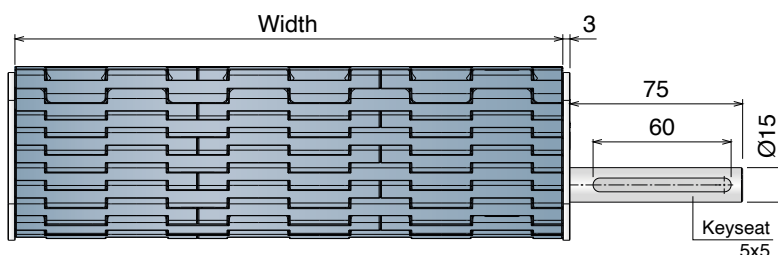



Series	Material	Width	Version
5336	*	0006	B
5336	*	0009	B
5336	*	0012	B
5336	*	0015	B
5336	*	0018	B
5336	*	0021	B
5336	*	0024	B

* Material			
LFA - Code 01		MX - Code 03	
Low friction Acetal		Performance PBT	
LFB - Code 23		Low friction Acetal	
Max w. load:	3000 N	Max w. load:	2700 N
Weight:	5,8 kg/m ²	Weight:	5,5 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey

Max w. load:	3000 N
Weight:	5,8 kg/m ²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

Transfer length 150mm

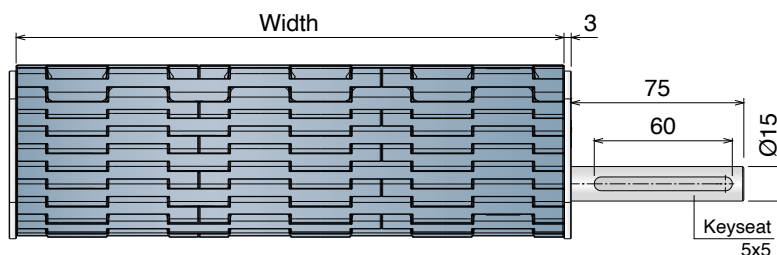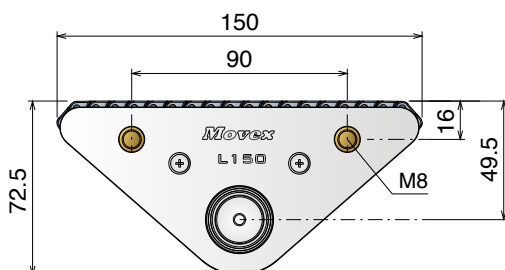

Series	Material	Width	Version
5338	*	0006	B
5338	*	0009	B
5338	*	0012	B
5338	*	0015	B
5338	*	0018	B
5338	*	0021	B
5338	*	0024	B


* Material			
LFA - Code 01		MX - Code 03	
Low friction Acetal		Performance PBT	
LFB - Code 23		Low friction Acetal	
Max w. load:	3000 N	Max w. load:	2700 N
Weight:	5,8 kg/m ²	Weight:	5,5 kg/m ²
Temp. range dry:	-40÷80 °C	Temp. range dry:	-40÷120 °C
Temp. range wet:	-40÷65 °C	Temp. range wet:	-40÷60 °C
Pin material:	PBT white	Pin material:	POM grey

Max w. load:	3000 N
Weight:	5,8 kg/m ²
Temp. range dry:	-40÷80 °C
Temp. range wet:	-40÷65 °C
Pin material:	PBT white

For different configurations please contact your sales representative.

553 SORTER⁺

MULTIDIRECTIONAL CONVEYOR

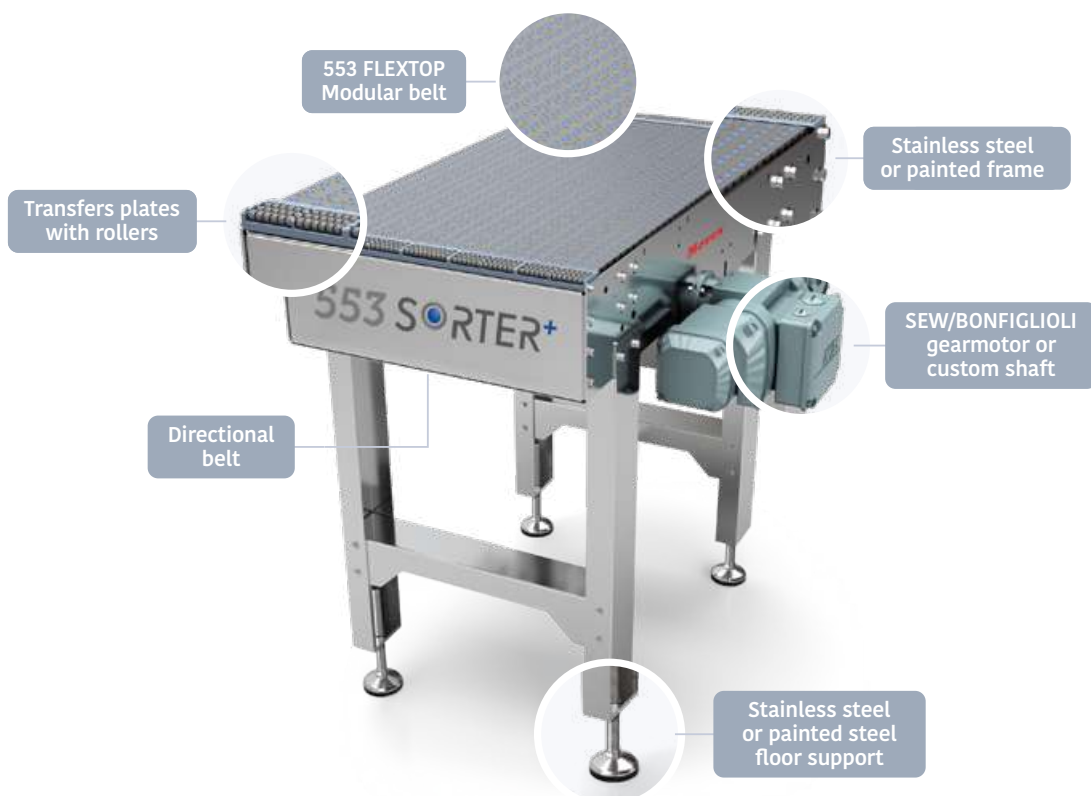

Product use

The **553 Sorter plus™** is a multidirectional conveyor, equipped with the unique and patented 553 FlexTop modular belt, and with directional belt or plate, is able to handle a variety of products at 360°.

The **553 Sorter plus™** is available in different widths and lengths and in 4 different versions:

- **Diverter** - able to quickly move side to side your goods
- **Dynamic Turn** - able to rotate dynamically your goods
- **Static Turn** - able to rotate statically your goods
- **Speed** - able to accelerate/decelerate your goods



BELT PITCH: 25,4 mm

THICKNESS: 8,7 mm

INCREMENTS: 76,2 mm

TOTAL LENGTH: 600mm ÷ 1400mm

TOTAL WIDTH: 390mm ÷ 1000mm

MATERIAL OF MODULES: Dark grey acetal (POM)

MATERIAL OF SPHERES: Blue Polyamide (PA)

TEMPERATURE RANGE

Dry: -40°C ÷ 80°C Wet: n.a.

(Dry: -40°F ÷ 176°F Wet: n.a.)

MAX. WORKING LOAD

27.500 N/m belt width


OPEN AREA 0%

FRAME Stainless steel or Painted steel

553 Sorter⁺ Diverter

Equipped with one directional belt underneath the 553 FlexTop belt running at transversal direction, the Sorter plus - diverter will let your products moving to the left or to the right.

This configuration is ideal for many types of applications, like distribution systems and logistics centers and can be used with many different types of packages, from the most traditional ones like cardboard boxes to polybags and paper envelopes.

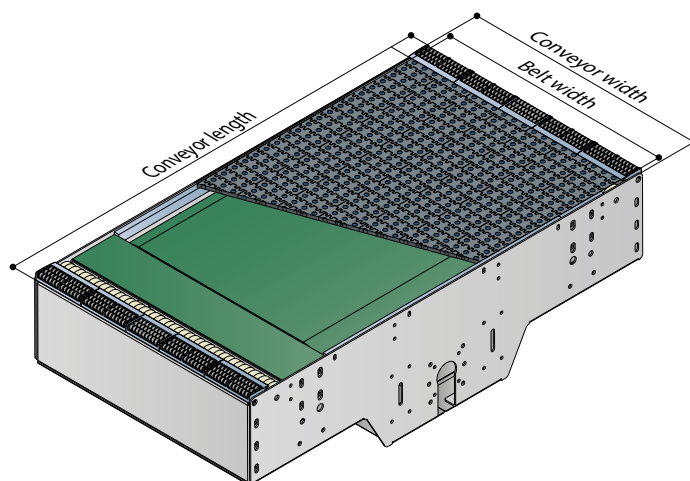


Conveyor Width	Belt Width	Conveyor Length				
		600mm	800mm	1000mm	1200mm	1400mm
390mm	381mm	W0390L0600-D	W0390L0800-D	-	-	-
470mm	457,2mm	W0470L0600-D	W0470L0800-D	W0470L1000-D	-	-
545mm	533,4mm	W0545L0600-D	W0545L0800-D	W0545L1000-D	-	-
620mm	609,6mm	-	W0620L0800-D	W0620L1000-D	W0620L1200-D	-
695mm	685,8mm	-	W0695L0800-D	W0695L1000-D	W0695L1200-D	-
770mm	762mm	-	W0770L0800-D	W0770L1000-D	W0770L1200-D	-
850mm	838,2mm	-	-	W0850L1000-D	W0850L1200-D	W0850L1400-D
925mm	914,4mm	-	-	W0925L1000-D	W0925L1200-D	W0925L1400-D
1000mm	990,6mm	-	-	-	W1000L1200-D	W1000L1400-D

These codes mean complete stainless steel conveyor, except floor supports and gearmotor, if you need to include them please see page 305.
For painted steel versions just add "S" at the end of the Article-Nr.


Conveyor Length	Directional belt Width	Available exit Width	
600mm	400mm	400	
800mm	600mm	400 - 600	
1000mm	800mm	400 - 600 - 800	
1200mm	1000mm	600 - 800 - 1000	
1400mm	1200mm	800 - 1000 - 1200	

Straight exit

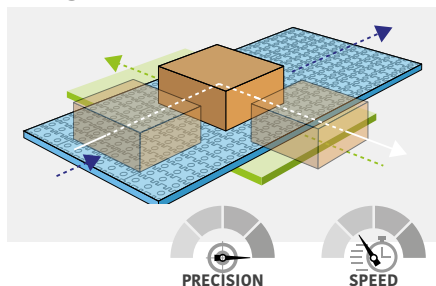


To get a completely straight exit, **the directional belt must be activated when 553 FlexTop is not running.**

Inclined exit

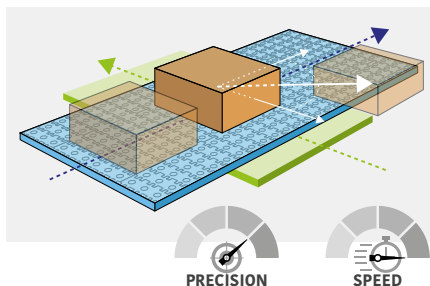

To get a 45° inclined direction, the **speed of the directional belt must be the same** as the speed of the 553 FlexTop and they have to work contemporary.

Curved exit

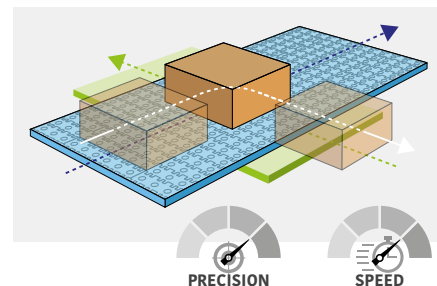

To get a straight exit without losing relatively too much time, the **directional belt can be activated also when the 553 FlexTop is running, while is reducing speed.**

The combination of the two speeds will determine the exit curve dimension.


553 Sorter⁺

Dynamic turn

Equipped with two directional belts underneath the 553 FlexTop belt running at opposite direction, the Sorter plus - dynamic turn will let your products start rotating.

This configuration is ideal to turn products in high-speed production lines that can be handled without stopping the 553 FlexTop belt.

The distance of the rotation depends by the combination of the 3 different speeds.

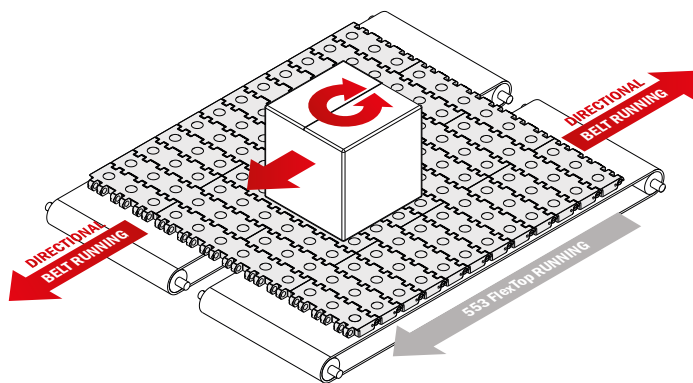

These codes mean complete stainless steel conveyor, except floor supports and gearmotor, if you need to include them please see page 305.

For painted steel versions just add "S" at the end of the Article-Nr.


Conveyor Width	Belt Width	Conveyor Length				
		600mm	800mm	1000mm	1200mm	1400mm
390mm	381mm	W0390L0600-DT	W0390L0800-DT	-	-	-
470mm	457,2mm	W0470L0600-DT	W0470L0800-DT	W0470L1000-DT	-	-
545mm	533,4mm	W0545L0600-DT	W0545L0800-DT	W0545L1000-DT	-	-
620mm	609,6mm	-	W0620L0800-DT	W0620L1000-DT	W0620L1200-DT	-
695mm	685,8mm	-	W0695L0800-DT	W0695L1000-DT	W0695L1200-DT	-
770mm	762mm	-	W0770L0800-DT	W0770L1000-DT	W0770L1200-DT	-
850mm	838,2mm	-	-	W0850L1000-DT	W0850L1200-DT	W0850L1400-DT
925mm	914,4mm	-	-	W0925L1000-DT	W0925L1200-DT	W0925L1400-DT
1000mm	990,6mm	-	-	-	W1000L1200-DT	W1000L1400-DT

553 Sorter⁺

Static turn

Equipped with one rotating plate underneath the 553 FlexTop belt, the Sorter plus - static turn will let your products start rotating.

This configuration is ideal to turn products with high-precision and they have to be handled while the 553 FlexTop belt is not running.

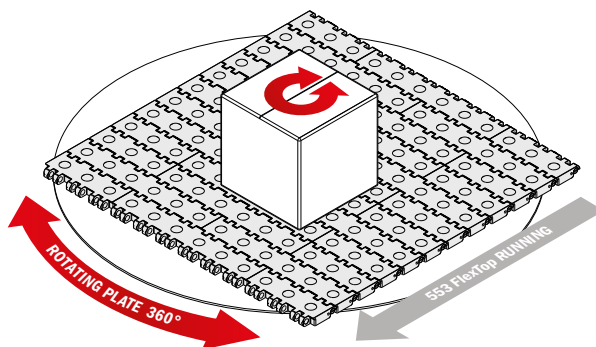


These codes mean complete stainless steel conveyor, except floor supports and gearmotor, if you need to include them please see page 305.

For painted steel versions just add "S" at the end of the Article-Nr.

Conveyor Width	Belt Width	Conveyor Length				
		600mm	800mm	1000mm	1200mm	1400mm
390mm	381mm	W0390L0600-ST	W0390L0800-ST	-	-	-
470mm	457,2mm	W0470L0600-ST	W0470L0800-ST	W0470L1000-ST	-	-
545mm	533,4mm	W0545L0600-ST	W0545L0800-ST	W0545L1000-ST	-	-
620mm	609,6mm	-	W0620L0800-ST	W0620L1000-ST	W0620L1200-ST	-
695mm	685,8mm	-	W0695L0800-ST	W0695L1000-ST	W0695L1200-ST	-
770mm	762mm	-	W0770L0800-ST	W0770L1000-ST	W0770L1200-ST	-
850mm	838,2mm	-	-	W0850L1000-ST	W0850L1200-ST	W0850L1400-ST
925mm	914,4mm	-	-	W0925L1000-ST	W0925L1200-ST	W0925L1400-ST
1000mm	990,6mm	-	-	-	W1000L1200-ST	W1000L1400-ST

553 Sorter⁺ Speed

Equipped with one directional belt underneath the 553 FlexTop belt running at same or opposite direction of the 553 FlexTop belt, the Sorter plus speed can accelerate or decelerate your products. This configuration is ideal to space your products without the need of having an additional conveyor.

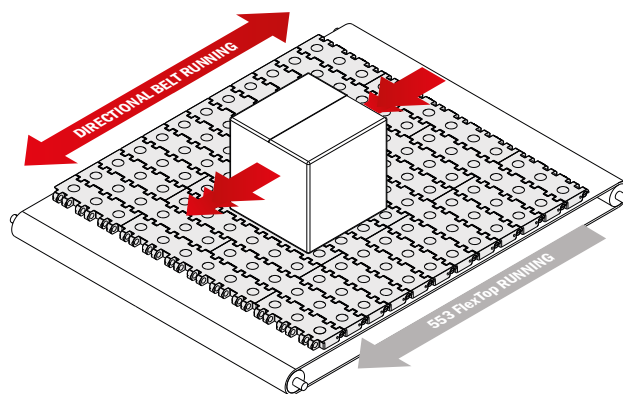


These codes mean complete stainless steel conveyor, except floor supports and gearmotor, if you need to include them please see page 305.

For painted steel versions just add "S" at the end of the Article-Nr.

Conveyor Width	Belt Width	Conveyor Length				
		600mm	800mm	1000mm	1200mm	1400mm
390mm	381mm	W0390L0600-S	W0390L0800-S	-	-	-
470mm	457,2mm	W0470L0600-S	W0470L0800-S	W0470L1000-S	-	-
545mm	533,4mm	W0545L0600-S	W0545L0800-S	W0545L1000-S	-	-
620mm	609,6mm	-	W0620L0800-S	W0620L1000-S	W0620L1200-S	-
695mm	685,8mm	-	W0695L0800-S	W0695L1000-S	W0695L1200-S	-
770mm	762mm	-	W0770L0800-S	W0770L1000-S	W0770L1200-S	-
850mm	838,2mm	-	-	W0850L1000-S	W0850L1200-S	W0850L1400-S
925mm	914,4mm	-	-	W0925L1000-S	W0925L1200-S	W0925L1400-S
1000mm	990,6mm	-	-	-	W1000L1200-S	W1000L1400-S

553 Sorter⁺

Floor support



- Stainless steel AISI 304 or painted steel
- Single or double floor fixation levellers
- Customizable height and specifications



Article Nr.	Conveyor Width - mm	Total Height - mm
W0390H	390	1000
W0470H	470	1000
W0545H	545	1000
W0620H	620	1000
W0695H	695	1000
W0770H	770	1000
W0850H	850	1000
W0925H	925	1000
W1000H	1000	1000

For different heights or custom specification please contact your sales representative.

For painted steel versions, just add "S" at the end of the Article-Nr.

553 Sorter⁺

Gearmotor

SEW Gearmotors

- Foodgrade oil
- Power 0,37kW – type WA30 DRN71M4
- Internal shaft position (no cable supplied)



Article Nr.	Power
M090-S/I	0,37kW

BONFIGLIOLI Gearmotors

- Power 0,37kW – type WA30 DRN71M4
- Internal shaft position (no cable supplied)




Article Nr.	Power
M090L-S/I	0,37kW

For different gearmotors please contact your sales representative


SEW and BONFIGLIOLI are believed to be the trademarks and/or trade names of their respective owners and are not owned or controlled by Movex S.p.A.

553 Sorter⁺


Photocells

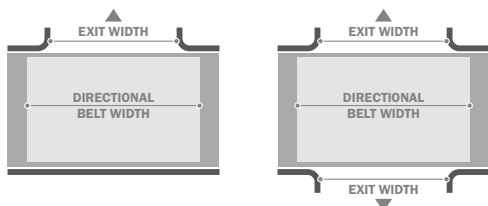

Conveyor Length	Directional belt Width	Available exit Width	Photocells Single exit	Photocells Double exit
600mm	400mm	400mm	L0600-SE0400	L0600-DE0400
800mm	600mm	400mm	L0800-SE0400	L0800-DE0400
		600mm	L0800-SE0600	L0800-DE0600
1000mm	800mm	400mm	L1000-SE0400	L1000-DE0400
		600mm	L1000-SE0600	L1000-DE0600
		800mm	L1000-SE0800	L1000-DE0800
1200mm	1000mm	600mm	L1200-SE0600	L1200-DE0600
		800mm	L1200-SE0800	L1200-DE0800
		1000mm	L1200-SE1000	L1200-DE1000
1400mm	1200mm	800mm	L1400-SE0800	L1400-DE0800
		1000mm	L1400-SE1000	L1400-DE1000
		1200mm	L1400-SE1200	L1400-DE1200

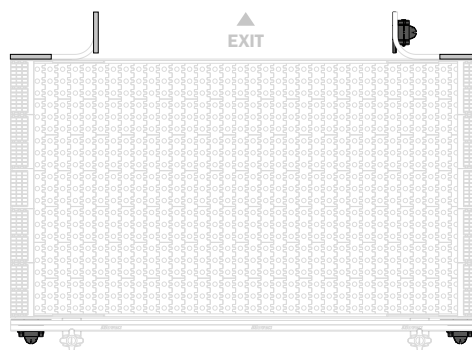


Configuration for single exit option.

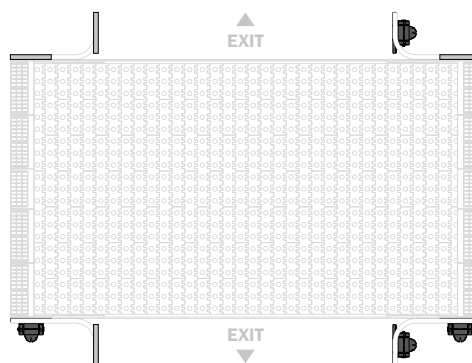


Configuration for double exit option.

553 Sorter⁺


Photocells and *BluLub*[®] guides

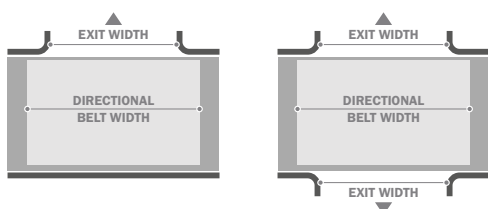

Conveyor Length	Directional belt Width	Available exit Width	Photocells/guides Single exit	Photocells/guides Double exit
600mm	400mm	400mm	L0600-SE0400K	L0600-DE0400K
800mm	600mm	400mm	L0800-SE0400K	L0800-DE0400K
		600mm	L0800-SE0600K	L0800-DE0600K
1000mm	800mm	400mm	L1000-SE0400K	L1000-DE0400K
		600mm	L1000-SE0600K	L1000-DE0600K
		800mm	L1000-SE0800K	L1000-DE0800K
1200mm	1000mm	600mm	L1200-SE0600K	L1200-DE0600K
		800mm	L1200-SE0800K	L1200-DE0800K
		1000mm	L1200-SE1000K	L1200-DE1000K
1400mm	1200mm	800mm	L1400-SE0800K	L1400-DE0800K
		1000mm	L1400-SE1000K	L1400-DE1000K
		1200mm	L1400-SE1200K	L1400-DE1200K

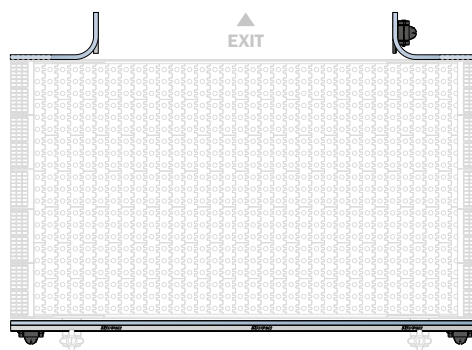

Configuration for single exit option.

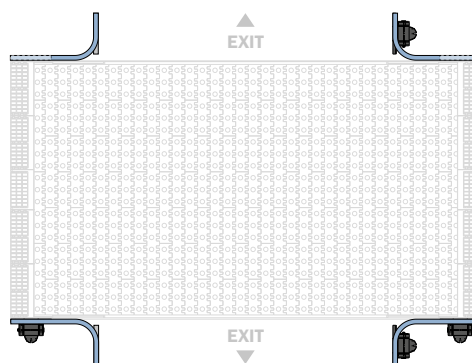

Configuration for double exit option.

ZERO CONTACT

CURVE CONVEYOR

Company	
Sales contact	
Contact	
Date	

Technical features	Please circle required input or fill the proper field							
Radius - mm (in)	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)	1800 (70.9)	2000 (78.7)
Width - mm (in)	200 (7.9)	400 (15.7)	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)
Angle	90°			180°			Different:	
Direction	Right (clockwise)				Left (counter clockwise)			
Gearmotor position	Internal				External			
Transfer plates	Plastic with stainless steel rollers				Stainless steel with stainless steel rollers			
Gearmotor *	No	Yes	SEW	Different shaft for:				
Floor supports height - mm (in)	No	Yes	1000+/-75 (39.4+/-3.0)		Different:			
ZeroATP - mm (in) **	No	Yes	Infeed		Outfeed		250 (9.8)	500 (19.7)

* For a different gearmotor, please fill with type and model, we will provide a quotation with the proper machined shaft

** In case of ZeroATP selected, standard transfers will not be included (based on sides selected)



ZERO^{PRO} ATP
ACTIVE TRANSFER PLATE

ZeroATP Pro **

No Yes

Type of product	
Product dimensions (mm)	
Weight per linear meter (Kg/m)	
Belt Speed	
Number of tracks per products	

Double check here if your combination Radius/Width is available

W/R	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)	1800 (70.9)	2000 (78.7)
200 (7.9)								
400 (15.7)								
600 (23.6)								
800 (31.5)								
1000 (39.4)								
1200 (47.2)								
1400 (55.1)								
1600 (63)								



Example of module filled

Technical features	Please circle required input or fill the proper field							
Radius - mm (inch)	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)	1800 (70.9)	2000 (78.7)
Width - mm (inch)	200 (7.9)	400 (15.7)	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)
Angle	90°			180°			Different:	
Direction	Right (clockwise)				Left (counter clockwise)			
Gearmotor position	Internal				External			
Transfer plates	Plastic with stainless steel rollers				No			
Painted steel frames	Blue Grey RAL 7031				Different (specify the RAL):			
Bottom safety cover	Yes				No			
Gearmotor *	No	Yes	NONFILOTTA Different shaft for:					
Floor supports height - mm (inch)	No	Yes	1000+/-75 (39.4+/-3.0)			Different:		
ZeroATP - mm (inch) **	No	Yes	Infeed		Outfeed		250 (9.8)	500 (19.7)

ZERO CONTACT

CURVE CONVEYOR

Company	
Sales contact	
Contact	
Date	

Technical features	Please circle required input or fill the proper field									
Radius - mm (in)	586 (23.1)	756 (29.8)	1011 (39.8)	1031 (40.6)	1116 (43.9)	1201 (47.3)	1286 (50.6)	1456 (57.3)	1541 (60.7)	
Width - mm (in)	249 (9.8)	269 (10.6)	419 (16.5)	439 (17.3)	504 (19.8)	524 (20.6)	864 (34)	1034 (40.7)		
Angle	90°			180°			Different:			
Direction	Right (clockwise)				Left (counter clockwise)					
Version *	Standard				“Two-Tracks”					
Gearmotor position	Internal				External					
Transfer plates	Plastic with stainless steel rollers				Stainless steel with stainless steel rollers					
Gearmotor **	No	Yes	SEW	Different shaft for:						
Floor supports height - mm (in)	No	Yes	1000+/-75 (39.4+/-3.0)		Different:					
ZeroATP - mm (in) ***	No	Yes	Infeed		Outfeed		250 (9.8)	500 (19.7)		

* In case of "Two-Tracks" version, no need to fill Gearmotor position fields

** In case of different gearmotor, please provide model and type name and we will quote a curve with required machined shaft

*** In case of ZeroATP, standard transfers plates will not be included (based on the side selected)



TRY IT NOW!

ZERO ATP
ACTIVE TRANSFER PLATE

ZeroATP Pro ***

No Yes

Type of product	
Product dimensions (mm)	
Weight per linear meter (Kg/m)	
Belt Speed	
Number of tracks per products	

Double check here if your combination Radius/Width is available

W/R	586 (23.1)	756 (29.8)	1011 (39.8)	1031 (40.6)	1116 (43.9)	1201 (47.3)	1286 (50.6)	1456 (57.3)	1541 (60.7)
249 (9.8)									
269 (10.6)									
419 (16.5)									
439 (17.3)									
504 (19.8)									
524 (20.6)									
864 (34)									
1034 (40.7)									



Example of module filled

Technical features	Please circle required input or fill the proper field								
Radius - mm (inch)	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)	1800 (70.9)	2000 (78.7)	
Width - mm (inch)	200 (7.9)	400 (15.7)	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)	
Angle	90°				180°		Different:		
Direction	Right (clockwise)				Left (counter clockwise)				
Gearmotor position	Internal				External				
Transfer plates	Plastic with stainless steel rollers				No				
Painted steel frames	Blue Grey RAL 7031				Different (specify the RAL):				
Bottom safety cover	Yes				No				
Gearmotor *	No	Yes	NONFILO® Different shaft for:						
Floor supports height - mm (inch)	No	Yes	1000+/-75 (39.4+/-3.0)		Different:				
ZeroATP - mm (inch) **	No	Yes	Infeed		Outfeed		250 (9.8)	500 (19.7)	

ZERO CONTACT S

CURVE CONVEYOR

Company	
Sales contact	
Contact	
Date	

Technical features	Please circle required input or fill the proper field							
Radius - mm (in)	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)	1800 (70.9)	2000 (78.7)
Width - mm (in)	200 (7.9)	400 (15.7)	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)
Angle	90°			180°			Different:	
Direction	Right (clockwise)				Left (counter clockwise)			
Gearmotor position	Internal				External			
Transfer plates	Plastic with stainless steel rollers				No			
Painted steel frames	Blue Grey RAL 7031				Different (specify the RAL):			
Bottom safety cover	Yes				No			
Gearmotor *	No	Yes	BONFIGLIOLI	Different shaft for:				
Floor supports height - mm (in)	No	Yes	1000+/-75 (39.4+/-3.0)		Different:			
ZeroATP - mm (in) **	No	Yes	Infeed		Outfeed		250 (9.8)	500 (19.7)

* In case of different gearmotor, please provide model and type name and we will quote a curve with required machined shaft

** In case of ZeroATP, standard transfers plates will not be included (based on the side selected)



ZERO^{PRO} ATP
ACTIVE TRANSFER PLATE

ZeroATP Pro **

No Yes

Type of product	
Product dimensions (mm)	
Weight per linear meter (Kg/m)	
Belt Speed	
Number of tracks per products	

Double check here if your combination Radius/Width is available

W/R	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)	1800 (70.9)	2000 (78.7)
200 (7.9)								
400 (15.7)								
600 (23.6)								
800 (31.5)								
1000 (39.4)								
1200 (47.2)								
1400 (55.1)								
1600 (63)								



Example of module filled

Technical features	Please circle required input or fill the proper field							
Radius - mm (inch)	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)	1800 (70.9)	2000 (78.7)
Width - mm (inch)	200 (7.9)	400 (15.7)	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)	1600 (63)
Angle	90°			180°			Different:	
Direction	Right (clockwise)				Left (counter clockwise)			
Gearmotor position	Internal				External			
Transfer plates	Plastic with stainless steel rollers				No			
Painted steel frames	Blue Grey RAL 7031				Different (specify the RAL):			
Bottom safety cover	Yes				No			
Gearmotor *	No	Yes	BONFIGLIOLI Different shaft for:					
Floor supports height - mm (inch)	No	Yes	1000+/-75 (39.4+/-3.0)			Different:		
ZeroATP - mm (inch) **	No	Yes	Infeed			Outfeed	250 (9.8)	500 (19.7)

553 SORTER⁺

MULTIDIRECTIONAL CONVEYOR

Company	
Sales contact	
Contact	
Date	

Technical features	Please circle required input or fill the proper field								
Width - mm (in)	390 (15.4)	470 (18.5)	545 (21.5)	620 (24.4)	695 (27.4)	770 (30.3)	850 (33.5)	925 (36.4)	1000 (39.4)
Length - mm (in)	600 (23.6)		800 (31.5)		1000 (39.4)		1200 (47.2)		1400 (55.1)
Version	DIVERTER		DYNAMIC TURN			STATIC TURN		SPEED	
Exit width - mm (in)	400 (15.8)		600 (23.6)		800 (31.5)		1000 (39.4)		1200 (47.2)
Exit type - mm (in)	SINGLE				DOUBLE				
Accessories	No	Yes	Photo eyes			Photo eyes and Side guides			
Gearmotor *	No	Yes	SEW	BONFIGLIOLI	Different shaft for:				
Floor supports height - mm (in)	No	Yes	1000+/-75 (39.4+/-3.0)		Different:				

* For a different gearmotor, please fill with type and model, we will provide a quotation with the proper machined shaft

** In case of ZeroATP, standard transfers plates will not be included (based on the side selected)



ZeroATP Pro **

No Yes

Type of product		Sketch
Product dimensions (mm)		
Product weight (Kg)		
Belt Speed		
Capacity		
Product pitch		
Movement description		

Double check here if your combination Length/Width is available

W/R	600 (23.6)	800 (31.5)	1000 (39.4)	1200 (47.2)	1400 (55.1)
390 (15.35)					
470 (18.5)					
545 (21.45)					
620 (24.4)					
695 (27.36)					
770 (30.3)					
850 (33.46)					
925 (36.4)					
1000 (39.4)					

Example of module filled

Technical features	Please circle required input or fill the proper field									
Width - mm (in)	390 (15.4)	470 (18.5)	545 (21.5)	620 (24.4)	695 (27.4)	770 (30.3)	850 (33.5)	925 (36.4)	1000 (39.4)	
Length - mm (in)	600 (23.6)		800 (31.5)		1000 (39.4)		1200 (47.2)		1400 (55.1)	
Version	DIVERTER		DYNAMIC TURN			STATIC TURN			SPEED	
Exit width - mm (in)	400 (15.8)		600 (23.6)		800 (31.5)		1000 (39.4)		1200 (47.2)	
Exit type - mm (in)	SINGLE						DOUBLE			
Accessories	No	Yes	Photo eyes			Photo eyes and Side guides				
Gearmotor *	No	Yes	SEW		BONFIGLIOLI		Different shaft for:			
Floor supports height - mm (in)	No	Yes	1000+/-75 (39.4+/-3.0) Different:							



For bore tolerance refers to
Movex engineering manual
available on our website.

movex
LOT 0080740

Belt sprockets

510  Pag 312	521-520 HD-522 HD-520 PRO LBP  Pag 313	521-520 HD-522 HD-520 PRO LBP  Pag 313	521-520 HD-522 HD-520 PRO LBP  Pag 314	520  Pag 314	520  Pag 315
520  Pag 315	520  Pag 316	520  Pag 316	525-530  Pag 317	525-530  Pag 317	590  Pag 318
590  Pag 318	550  Pag 319	550  Pag 319	550  Pag 320	550  Pag 320	550 PRO  Pag 321
550 PRO  Pag 321	550 PRO  Pag 322	550 PRO  Pag 322	551  Pag 323	551  Pag 323	551  Pag 324
551  Pag 324	552  Pag 325	552  Pag 325	553  Pag 326	553  Pag 326	556  Pag 327
556  Pag 327	260-261  Pag 328	260-261  Pag 328	260-261  Pag 329	260-261  Pag 329	600  Pag 330
600  Pag 330	600 Support  Pag 331	600 Support  Pag 331	600 Split S. roller  Pag 331	ZERO CONTACT  Pag 332	ZERO CONTACT PRO  Pag 332
500RR  Pag 333	500RR  Pag 333	500RR SPLIT V.  Pag 334			

Material
Info:




pg. 666

510

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

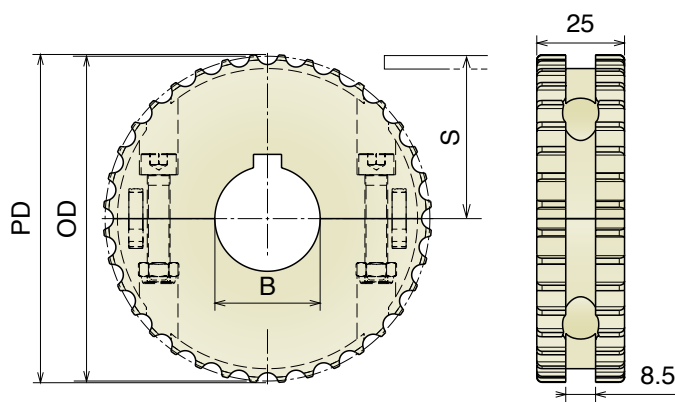

Part	Article-Nr.	Z-	Bore	PD	OD	S
1599	159936E	16**	20	41	40,2	16,65
1601	160101E	18**	25	46,5	47,3	20,2
1601	160111E		20* 20	□		
1598	159896E	20**	25	51,5	51,5	22,3
1602	160201E	24**	25	61,8	62,6	27,9
1603	160206E		25* 25	□		
1603	160301	36	25	92,6	93,5	43,3
1603	160302		30			
1603	160303		35			
1603	160304		40			
1603	160306		25* 25	□		
1603	160307		30* 30	□		
1603	160308		40* 40	□		


**Drive sprockets z-16, z-18, z-20 and z-24 are supplied non-split

521-520HD-522HD-520PROLBP

Ruota traino divisa, fresata

Split drive sprocket, machined


geteiltes Antriebskettenrad, gefräst

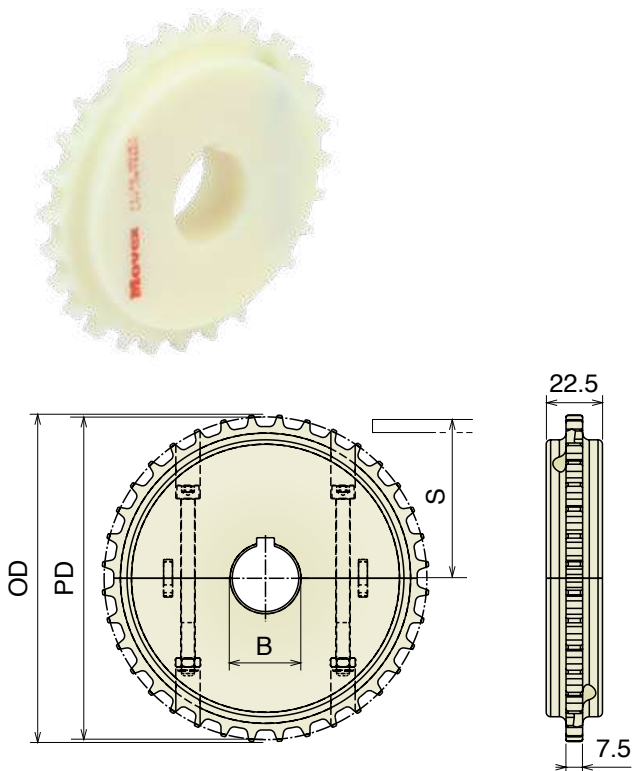

Part	Article-Nr.	Z-	Bore	PD	OD	S
1561	156101	28	25	113,4	115,4	52,4
1561	156102		30			
1561	156103		35			
1561	156104		40			
1561	156106		25* 25	∇		
1561	156107		30* 30	∇		
1561	156108		40* 40	∇		
1562	156201	36	25	145,7	147,7	68,5
1562	156202		30			
1562	156203		35			
1562	156204		40			
1562	156206		25* 25	∇		
1562	156207		30* 30	∇		
1562	156208		40* 40	∇		
1563	156301	38	25	153,8	155,8	72,6
1563	156302		30			
1563	156303		35			
1563	156304		40			
1563	156306		25* 25	∇		
1563	156307		30* 30	∇		
1563	156308		40* 40	∇		
1564	156401	40	25	161,9	163,8	76,6
1564	156402		30			
1564	156403		35			
1564	156404		40			
1564	156406		25* 25	∇		
1564	156407		30* 30	∇		
1564	156408		40* 40	∇		

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

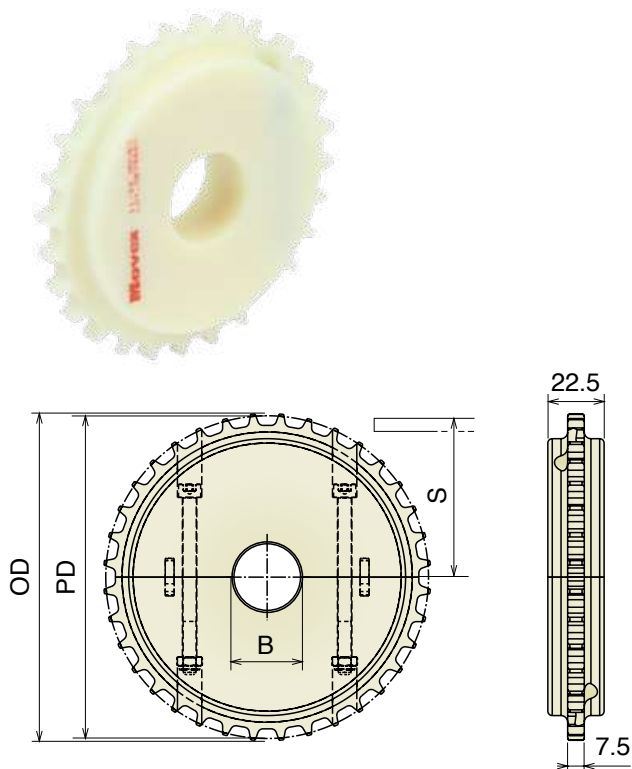


Part	Article-Nr.	Z-	Bore	PD	OD	S
1561	156150	28	18*	113,4	115,4	52,4
1561	156151		25			
1561	156152		30			
1561	156153		35			
1561	156154		40			
1562	156250	36	18*	145,7	147,7	68,5
1562	156251		25			
1562	156252		30			
1562	156253		35			
1562	156254		40			
1563	156350	38	18*	153,8	155,8	72,6
1563	156351		25			
1563	156352		30			
1563	156353		35			
1563	156354		40			
1564	156450	40	18*	161,9	163,8	76,6
1564	156451		25			
1564	156452		30			
1564	156453		35			
1564	156454		40			

*Plain Bore

521-520HD-522HD-520PROLBP


Ruota traino divisa, stampata
Split drive sprocket, molded
geteiltes Antriebskettenrad, gespritzt

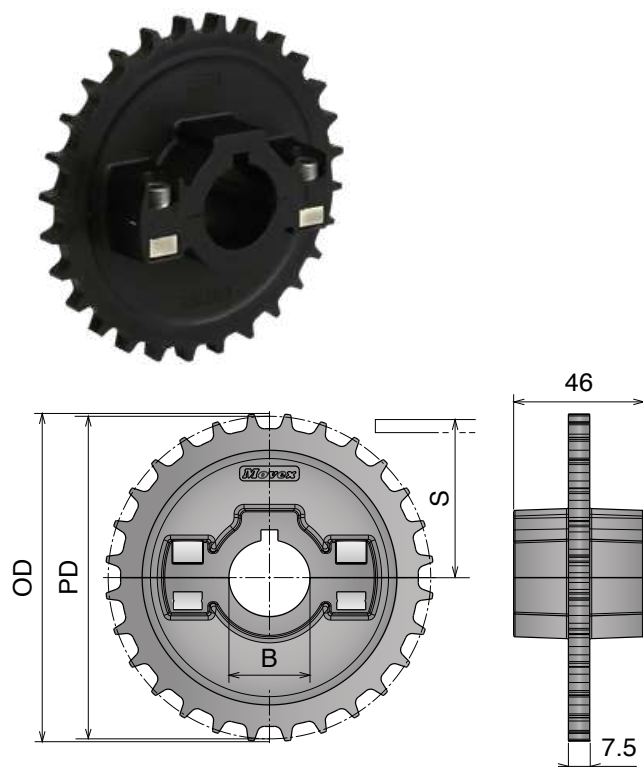

Part	Article-Nr.	Z-	Bore	PD	OD	S
1630	163001	24	25	97,3	99,3	44,3
1630	163002		30			
1630	163003		35			
1630	163004		40			
1630	163006		25* 25	□		
1630	163007		30* 30	□		
1630	163008		40* 40	□		
1631	163101	28	25	113,4	115,4	52,4
1631	163102		30			
1631	163103		35			
1631	163104		40			
1631	163106		25* 25	□		
1631	163107		30* 30	□		
1631	163108		40* 40	□		
1632	163201	36	25	145,7	147,7	68,5
1632	163202		30			
1632	163203		35			
1632	163204		40			
1632	163206		25* 25	□		
1632	163207		30* 30	□		
1632	163208		40* 40	□		

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

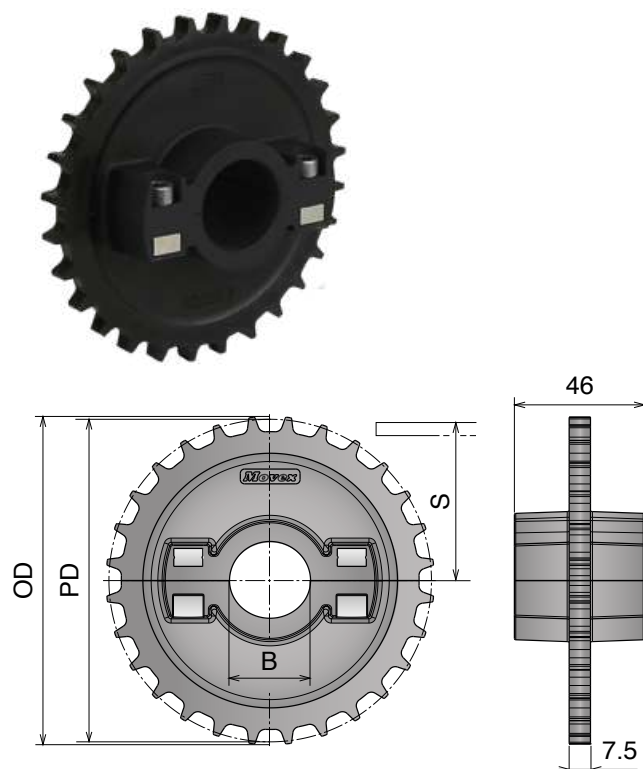


Part	Article-Nr.	Z-	Bore	PD	OD	S
1630	163051	24	25	97,3	99,3	44,3
1630	163052		30			
1630	163053		35			
1630	163054		40			
1631	163151	28	25	113,4	115,4	52,4
1631	163152		30			
1631	163153		35			
1631	163154		40			
1632	163251	36	25	145,7	147,7	68,5
1632	163252		30			
1632	163253		35			
1632	163254		40			

520

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst


Delivery: **Easy** **Standard**

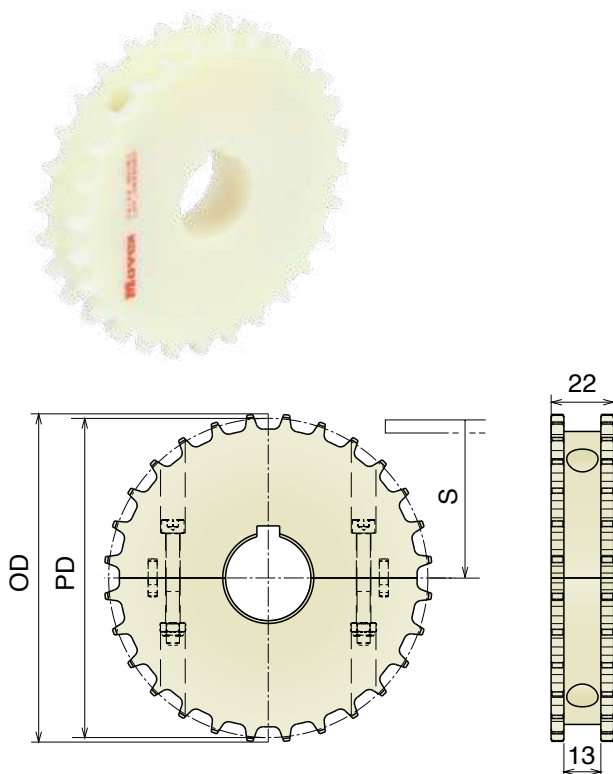

Part	Article-Nr.	Z-	Bore	PD	OD	S
1501	150101	28	25	113,4	115,4	52,4
1501	150102		30			
1501	150103		35			
1501	150104		40			
1501	150106		25* 25	∇		
1501	150107		30* 30	∇		
1501	150108		40* 40	∇		
1502	150201	36	25	145,7	147,7	68,5
1502	150202		30			
1502	150203		35			
1502	150204		40			
1502	150206		25* 25	∇		
1502	150207		30* 30	∇		
1502	150208		40* 40	∇		
1503	150301	38	25	153,8	155,8	72,6
1503	150302		30			
1503	150303		35			
1503	150304		40			
1503	150306		25* 25	∇		
1503	150307		30* 30	∇		
1503	150308		40* 40	∇		
1504	150401	40	25	161,9	163,8	76,6
1504	150402		30			
1504	150403		35			
1503	150404		40			
1504	150406		25* 25	∇		
1504	150407		30* 30	∇		
1504	150408		40* 40	∇		

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

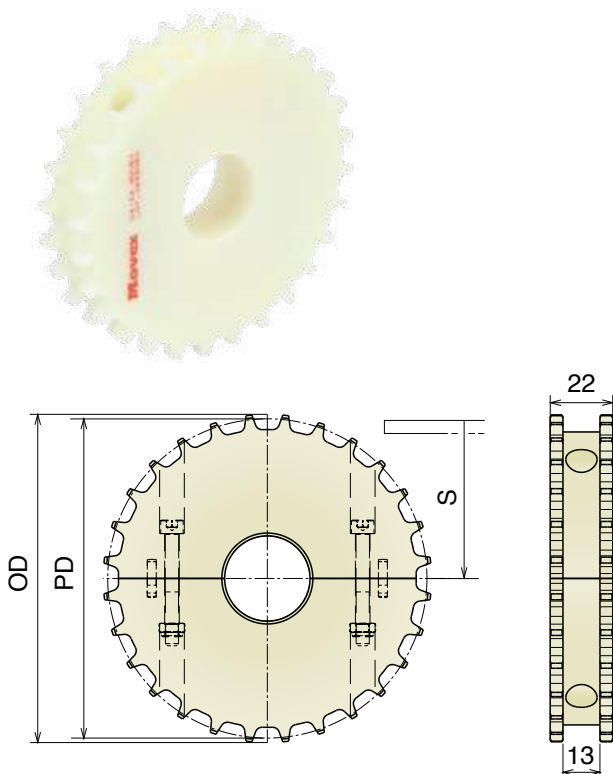

Part	Article-Nr.	Z-	Bore	PD	OD	S
1501	150150	28	18*	113,4	115,4	52,4
1501	150151		25			
1501	150152		30			
1501	150153		35			
1501	150154		40			
1502	150250	36	18*	145,7	147,7	68,5
1502	150251		25			
1502	150252		30			
1502	150253		35			
1502	150254		40			
1503	150350	38	18*	153,8	155,8	72,6
1503	150351		25			
1503	150352		30			
1503	150353		35			
1503	150354		40			
1504	150450	40	18*	161,9	163,8	76,6
1504	150451		25			
1504	150452		30			
1504	150453		35			
1504	150454		40			

*Plain Bore

• Materiale / Material / Materialien:

Poliammide rinforzato / Polyamide reinforced / Verstärktes Polyamid


Viti: Acciaio inox / Screws: Stainless steel / Schrauben: Edelstahl

Dadi: Ottone nichelato / Nuts: Nickel plated brass / Mutter: Messing

520


Ruota traino divisa, stampata

Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

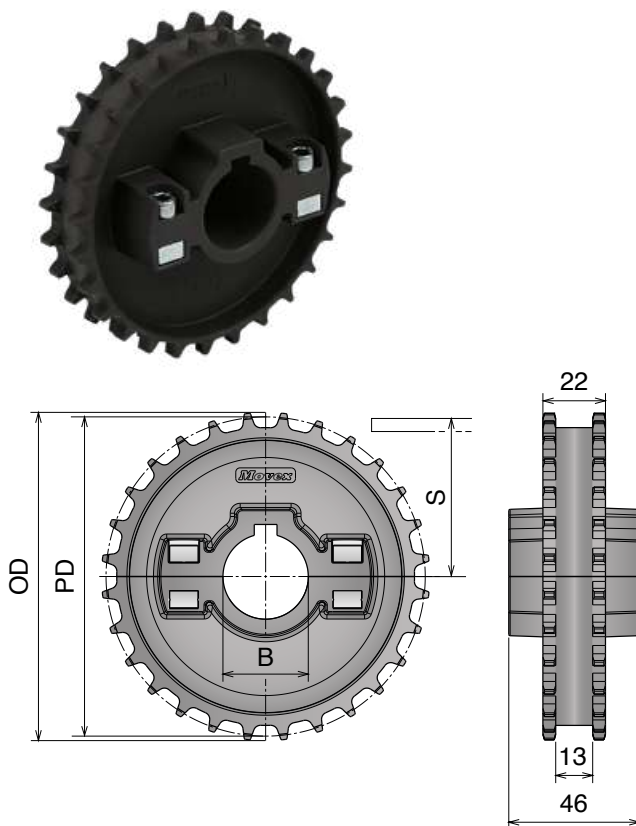Delivery: **Easy** **Standard**

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

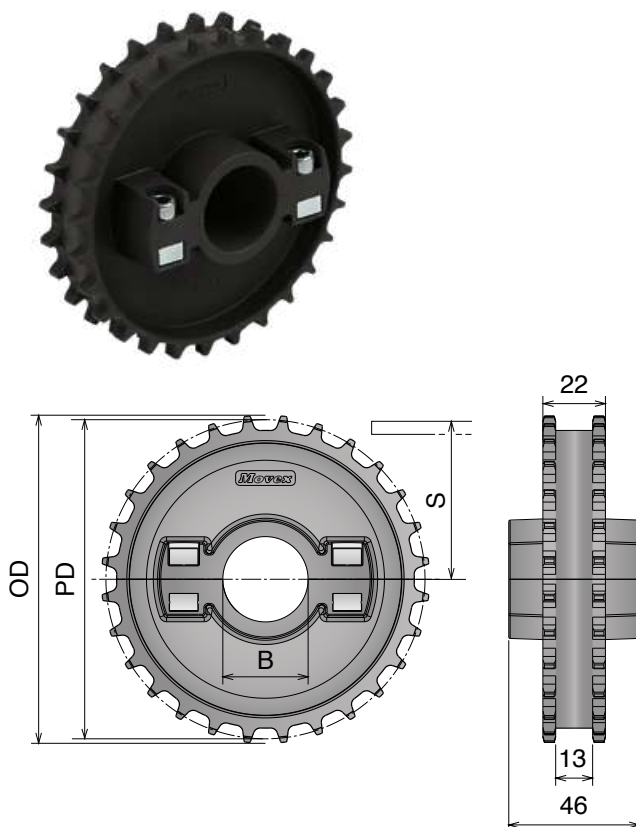

Part	Article-Nr.	Z-	Bore	PD	OD	S
1505	150501	24	25	97,3	99,3	44,3
1505	150502		30			
1505	150503		35			
1505	150504		40			
1505	150506		25* 25	□		
1505	150507		30* 30	□		
1505	150508		40* 40	□		
1506	150601	28	25	113,4	115,4	52,4
1506	150602		30			
1506	150603		35			
1506	150604		40			
1506	150606		25* 25	□		
1506	150607		30* 30	□		
1506	150608		40* 40	□		
1507	150701	36	25	145,7	147,7	68,5
1507	150702		30			
1507	150703		35			
1507	150704		40			
1507	150706		25* 25	□		
1507	150707		30* 30	□		
1507	150708		40* 40	□		


Part	Article-Nr.	Z-	Bore	PD	OD	S
1505	150551	24	25	97,3	99,3	44,3
1505	150552		30			
1505	150553		35			
1505	150554		40			
1506	150651	28	25	113,4	115,4	52,4
1506	150652		30			
1506	150653		35			
1506	150654		40			
1507	150751	36	25	145,7	147,7	68,5
1507	150752		30			
1507	150753		35			
1507	150754		40			

525-530

Ruota traino divisa, fresata


Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

Delivery: **Easy** **Standard**

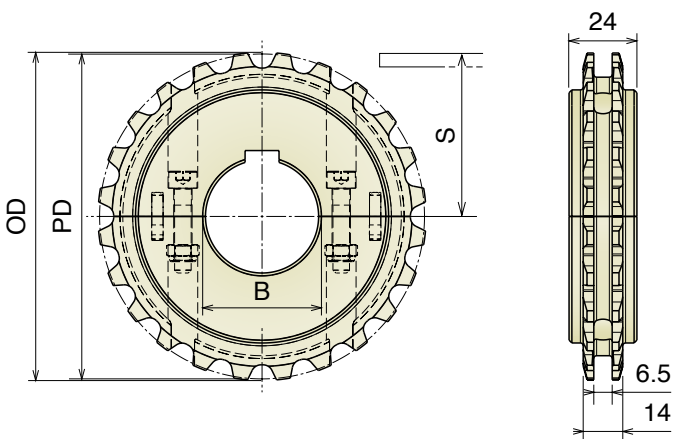

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

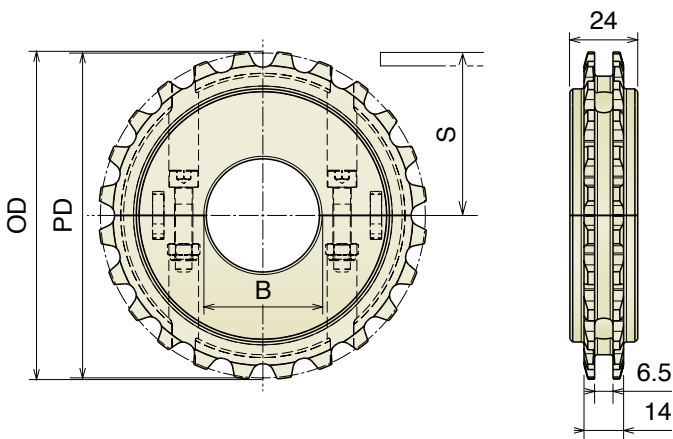

Part	Article-Nr.	Z-	Bore	PD	OD	S
1581	158101E	12**	25	58,1	58,2	24,1
1581	158106E		25x25	☐		
1582	158201E	16**	25	77,1	77,7	33,6
1582	158202E		30			
1582	158206E		25x25	☐		
1582	158207E		30x30	☐		
1583	158301	24	25	114,9	115,5	52,5
1583	158302		30			
1583	158303		35			
1583	158304		40			
1583	158306		25x25	☐		
1583	158307		30x30	☐		
1583	158308		40x40	☐		
1584	158401	32	25	153,4	154,8	71,75
1584	158402		30			
1584	158403		35			
1584	158404		40			
1584	158406		25x25	☐		
1584	158407		30x30	☐		
1584	158408		40x40	☐		

**Drive sprockets Z-12 and Z-16 are supplied non-split.

Part	Article-Nr.	Z-	Bore	PD	OD	S
1581	158150E	12**	18*	58,1	58,2	24,1
1581	158151E		25			
1582	158250E	16**	18*	77,1	77,7	33,6
1582	158251E		25			
1582	158252E		30			
1583	158350	24	18*	114,9	115,5	52,5
1583	158351		25			
1583	158352		30			
1583	158353		35			
1583	158354		40			
1584	158450	32	18*	153,4	154,8	71,75
1584	158451		25			
1584	158452		30			
1584	158453		35			
1584	158454		40			


**Drive sprockets Z-12 and Z-16 are supplied non-split.

*Plain Bore

590

Ruota traino divisa, fresata


Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

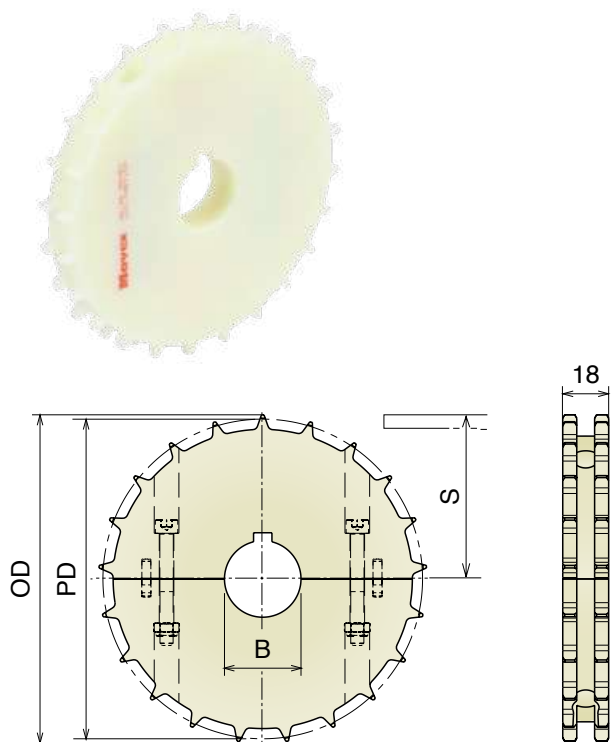

Part	Article-Nr.	Z-	Bore	PD	OD	S
1511	151101	17	25	100,7	103,4	46,0
1511	151102		30			
1511	151103		35			
1511	151104		40			
1511	151106		25* 25	□		
1511	151107		30* 30	□		
1511	151108		40* 40	□		
1512	151201	21	25	126,0	128,7	58,65
1512	151202		30			
1512	151203		35			
1512	151204		40			
1512	151206		25* 25	□		
1512	151207		30* 30	□		
1512	151208		40* 40	□		
1513	151301	24	25	142,9	145,6	67,1
1513	151302		30			
1513	151303		35			
1513	151304		40			
1513	151306		25* 25	□		
1513	151307		30* 30	□		
1513	151308		40* 40	□		
1514	151401	25	25	149,0	151,7	70,15
1514	151402		30			
1514	151403		35			
1514	151404		40			
1514	151406		25* 25	□		
1514	151407		30* 30	□		
1514	151408		40* 40	□		

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

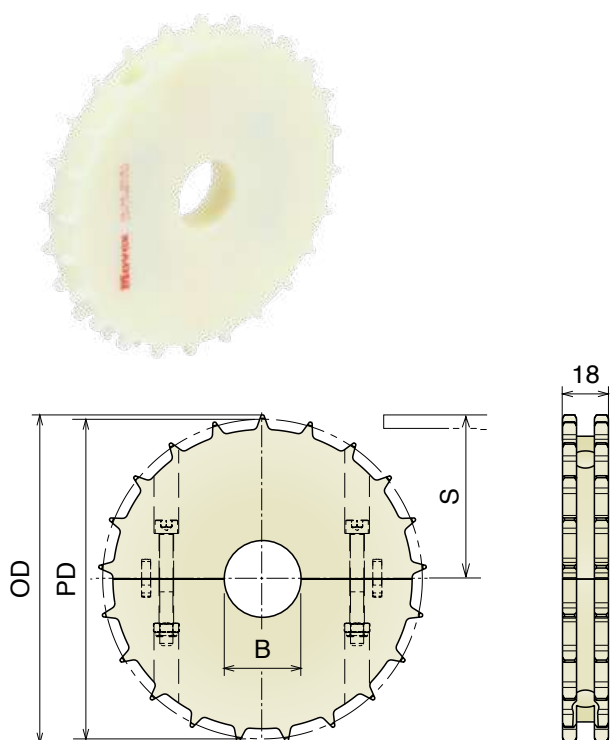

Part	Article-Nr.	Z-	Bore	PD	OD	S
1511	151150	17	18*	100,7	103,4	46,0
1511	151151		25			
1511	151152		30			
1511	151153		35			
1511	151154		40			
1512	151250	21	18*	126,0	128,7	58,65
1512	151251		25			
1512	151252		30			
1512	151253		35			
1512	151254		40			
1513	151350	24	18*	142,9	145,6	67,1
1513	151351		25			
1513	151352		30			
1513	151353		35			
1513	151354		40			
1514	151450	25	18*	149,0	151,7	70,15
1514	151451		25			
1514	151452		30			
1514	151453		35			
1514	151454		40			


*Plain Bore

550

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst


Delivery: **Easy** **Standard**

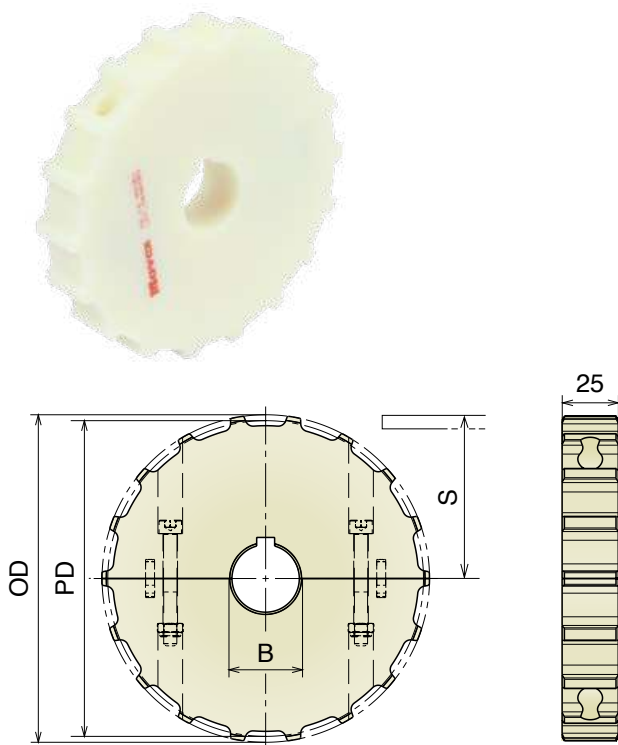

Part	Article-Nr.	Z-	Bore	PD	OD	S
1521	152101	14	25	114,1	114,0	52,7
1521	152102		30			
1521	152103		35			
1521	152104		40			
1521	152106		25* 25	∇		
1521	152107		30* 30	∇		
1521	152108		40* 40	∇		
1522	152201	16	25	130,2	130,0	60,7
1522	152202		30			
1522	152203		35			
1522	152204		40			
1522	152206		25* 25	∇		
1522	152207		30* 30	∇		
1522	152208		40* 40	∇		
1523	152301	18	25	146,3	146,0	68,8
1523	152302		30			
1523	152303		35			
1523	152304		40			
1523	152306		25* 25	∇		
1523	152307		30* 30	∇		
1523	152308		40* 40	∇		
1524	152401	20	25	162,4	162,0	76,8
1524	152402		30			
1524	152403		35			
1524	152404		40			
1524	152406		25* 25	∇		
1524	152407		30* 30	∇		
1524	152408		40* 40	∇		

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

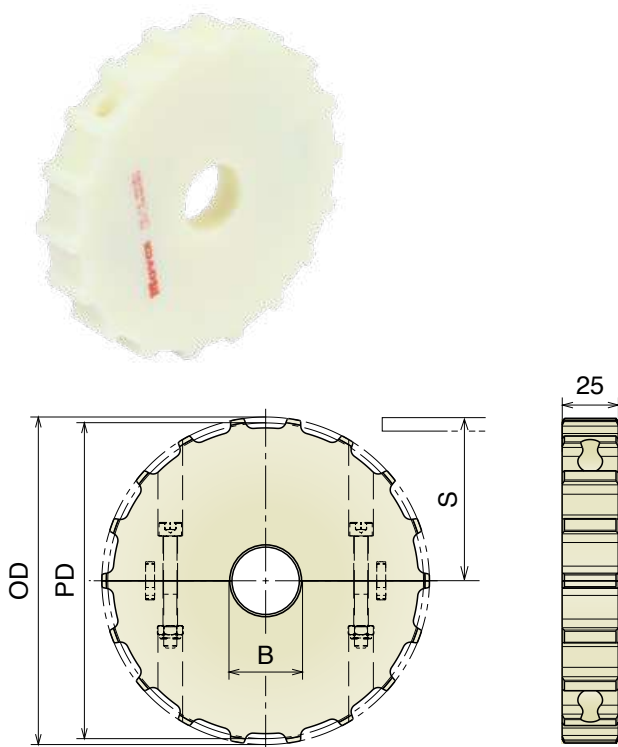


Part	Article-Nr.	Z-	Bore	PD	OD	S
1521	152150	14	18*	114,1	114,0	52,7
1521	152151		25			
1521	152152		30			
1521	152153		35			
1521	152154		40			
1522	152250	16	18*	130,2	130,0	60,7
1522	152251		25			
1522	152252		30			
1522	152253		35			
1522	152254		40			
1523	152350	18	18*	146,3	146,0	68,8
1523	152351		25			
1523	152352		30			
1523	152353		35			
1523	152354		40			
1524	152450	20	18*	162,4	162,0	76,8
1524	152451		25			
1524	152452		30			
1524	152453		35			
1524	152454		40			

*Plain Bore

550

Ruota traino divisa, stampata


Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

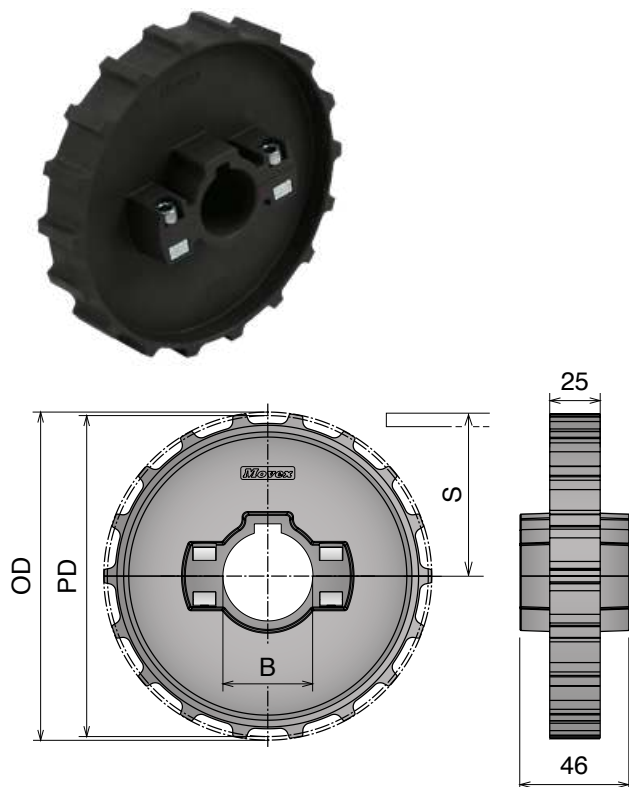Delivery: **Easy** **Standard**

Part	Article-Nr.	Z-	Bore	PD	OD	S
1525	152501	14	25	114,1	114,0	52,7
1525	152502		30			
1525	152503		35			
1525	152504		40			
1525	152506		25* 25	□		
1525	152507		30* 30	□		
1525	152508		40* 40	□		
1526	152601	16	25	130,2	130,0	60,7
1526	152602		30			
1526	152603		35			
1526	152604		40			
1526	152606		25* 25	□		
1526	152607		30* 30	□		
1526	152608		40* 40	□		
1527	152701	18	25	146,3	146,0	68,8
1527	152702		30			
1527	152703		35			
1527	152704		40			
1527	152706		25* 25	□		
1527	152707		30* 30	□		
1527	152708		40* 40	□		
1528	152801	20	25	162,4	162,0	76,8
1528	152802		30			
1528	152803		35			
1528	152804		40			
1528	152806		25* 25	□		
1528	152807		30* 30	□		
1528	152808		40* 40	□		

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

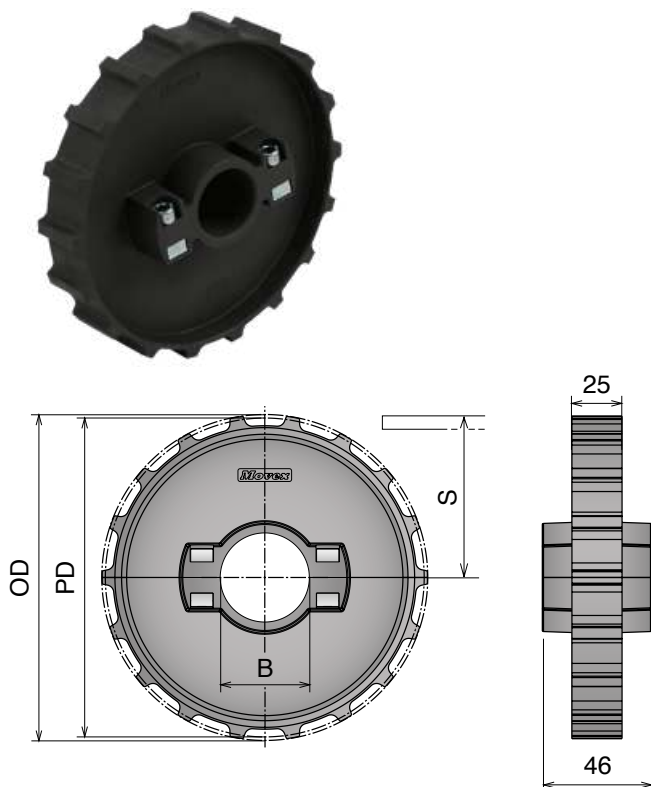


Part	Article-Nr.	Z-	Bore	PD	OD	S
1525	152551	14	25	114,1	114,0	52,7
1525	152552		30			
1525	152553		35			
1525	152554		40			
1526	152651	16	25	130,2	130,0	60,7
1526	152652		30			
1526	152653		35			
1526	152654		40			
1527	152751	18	25	146,3	146,0	68,8
1527	152752		30			
1527	152753		35			
1527	152754		40			
1528	152851	20	25	162,4	162,0	76,8
1528	152852		30			
1528	152853		35			
1528	152854		40			

550 PRO

Ruota traino divisa, fresata


Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

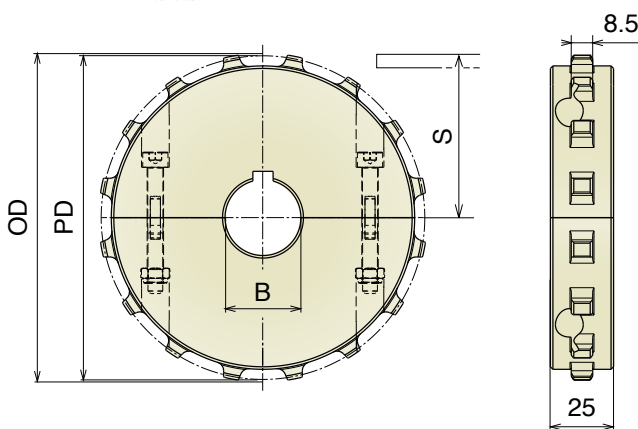

Part	Article-Nr.	Z-	Bore	PD	OD	S
1640	164001	14	25	114,1	114,0	52,7
1640	164002		30			
1640	164003		35			
1640	164004		40			
1640	164006		25* 25	∇		
1640	164007		30* 30	∇		
1640	164008		40* 40	∇		
1641	164101	16	25	130,2	130,0	60,7
1641	164102		30			
1641	164103		35			
1641	164104		40			
1641	164106		25* 25	∇		
1641	164107		30* 30	∇		
1641	164108		40* 40	∇		
1642	164201	18	25	146,3	146,0	68,8
1642	164202		30			
1642	164203		35			
1642	164204		40			
1642	164206		25* 25	∇		
1642	164207		30* 30	∇		
1642	164208		40* 40	∇		
1643	164301	20	25	162,4	162,0	76,8
1643	164302		30			
1643	164303		35			
1643	164304		40			
1643	164306		25* 25	∇		
1643	164307		30* 30	∇		
1643	164308		40* 40	∇		

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad,, gefräst

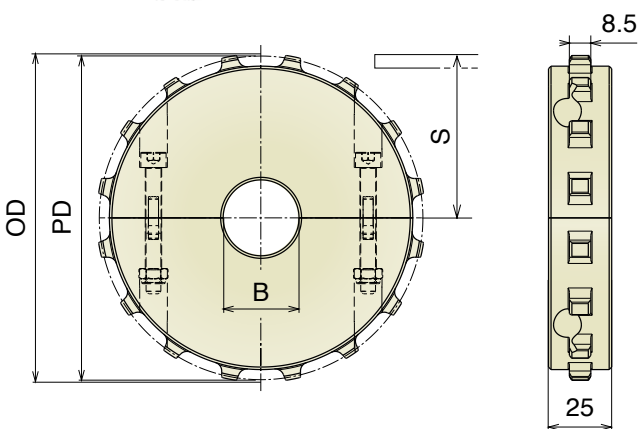


Part	Article-Nr.	Z-	Bore	PD	OD	S
1640	164050	14	18*	114,1	114,0	52,7
1640	164051		25			
1640	164052		30			
1640	164053		35			
1640	164054		40			
1641	164150	16	18*	130,2	130,0	60,7
1641	164151		25			
1641	164152		30			
1641	164153		35			
1641	164154		40			
1642	164250	18	18*	146,3	146,0	68,8
1642	164251		25			
1642	164252		30			
1642	164253		35			
1642	164254		40			
1643	164350	20	18*	162,4	162,0	76,8
1643	164351		25			
1643	164352		30			
1643	164353		35			
1643	164354		40			

*Plain Bore

550 PRO

Ruota traino divisa, stampata


Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

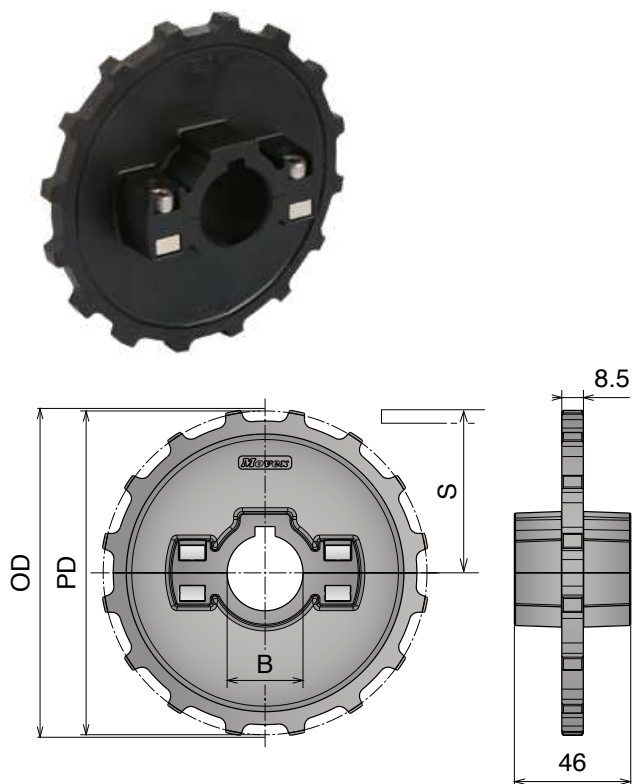

Part	Article-Nr.	Z-	Bore	PD	OD	S
1650	165001	14	25	114,1	114,0	52,7
1650	165002		30			
1650	165003		35			
1650	165004		40			
1650	165006		25* 25	□		
1650	165007		30* 30	□		
1650	165008		40* 40	□		
1651	165101	16	25	130,2	130,0	60,7
1651	165102		30			
1651	165103		35			
1651	165104		40			
1651	165106		25* 25	□		
1651	165107		30* 30	□		
1651	165108		40* 40	□		
1652	165201	18	25	146,3	146,0	68,8
1652	165202		30			
1652	165203		35			
1652	165204		40			
1652	165206		25* 25	□		
1652	165207		30* 30	□		
1652	165208		40* 40	□		
1653	165301	20	25	162,4	162,0	76,8
1653	165302		30			
1653	165303		35			
1653	165304		40			
1653	165306		25* 25	□		
1653	165307		30* 30	□		
1653	165308		40* 40	□		

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

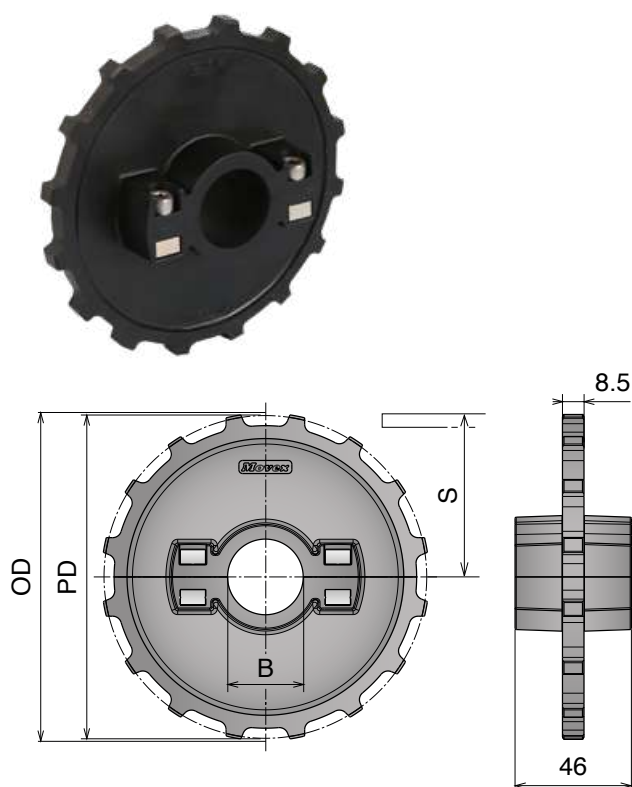


Part	Article-Nr.	Z-	Bore	PD	OD	S
1650	165051	14	25	114,1	114,0	52,7
1650	165052		30			
1650	165053		35			
1650	165054		40			
1651	165151	16	25	130,2	130,0	60,7
1651	165152		30			
1651	165153		35			
1651	165154		40			
1652	165251	18	25	146,3	146,0	68,8
1652	165252		30			
1652	165253		35			
1652	165254		40			
1653	165351	20	25	162,4	162,0	76,8
1653	165352		30			
1653	165353		35			
1653	165354		40			

551


Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

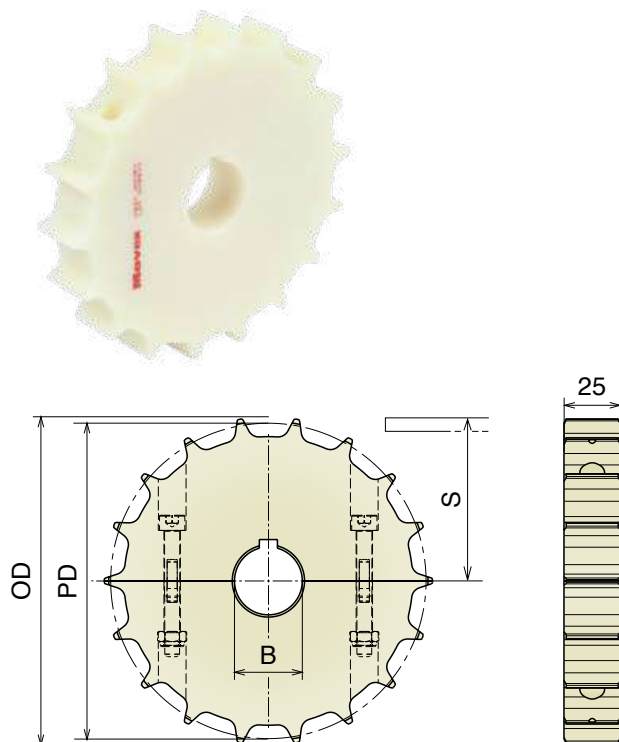

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

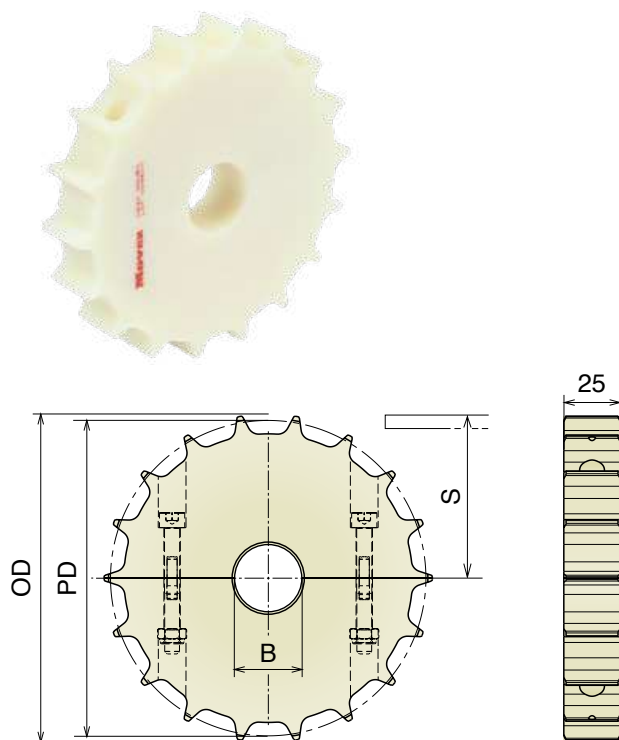

Part	Article-Nr.	Z-	Bore	PD	OD	S
1539	153901	11	25	90,2	92,0	39,7
1539	153902		30			
1539	153903E		35			
1539	153904E		40			
1539	153906		25* 25	□		
1539	153907		30* 30	□		
1539	153908E		40* 40	□		
1531	153101	14	25	114,2	113,5	50,7
1531	153102		30			
1531	153103		35			
1531	153104		40			
1531	153106		25* 25	□		
1531	153107		30* 30	□		
1531	153108		40* 40	□		
1532	153201	16	25	130,2	129,0	58,7
1532	153202		30			
1532	153203		35			
1532	153204		40			
1532	153206		25* 25	□		
1532	153207		30* 30	□		
1532	153208		40* 40	□		
1533	153301	18	25	146,3	145,3	66,7
1533	153302		30			
1533	153303		35			
1533	153304		40			
1533	153306		25* 25	□		
1533	153307		30* 30	□		
1533	153308		40* 40	□		
1534	153401	20	25	162,4	161,7	74,8
1534	153402		30			
1534	153403		35			
1534	153404		40			
1534	153406		25* 25	□		
1534	153407		30* 30	□		
1534	153408		40* 40	□		
1634	163401	21	25	170,4	169,7	78,9
1634	163402		30			
1634	163403		35			
1634	163404		40			
1634	163406		25* 25	□		
1634	163407		30* 30	□		
1634	163408		40* 40	□		


Part	Article-Nr.	Z-	Bore	PD	OD	S
1539	153950	11	18*	90,2	92,0	39,7
1539	153951		25			
1539	153952		30			
1539	153953E		35			
1539	153954E		40			
1531	153150	14	18*	114,2	114,0	50,7
1531	153151		25			
1531	153152		30			
1531	153153		35			
1531	153154		40			
1532	153250	16	18*	130,2	129,0	58,7
1532	153251		25			
1532	153252		30			
1532	153253		35			
1532	153254		40			
1533	153350	18	18*	146,3	145,3	66,7
1533	153351		25			
1533	153352		30			
1533	153353		35			
1533	153354		40			
1534	153450	20	18*	162,4	161,7	74,8
1534	153451		25			
1534	153452		30			
1534	153453		35			
1534	153454		40			
1634	163450	21	18*	170,4	169,7	78,9
1634	163451		25			
1634	163452		30			
1634	163453		35			
1634	163454		40			

*Plain Bore

551

Ruota traino divisa, stampata


Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt

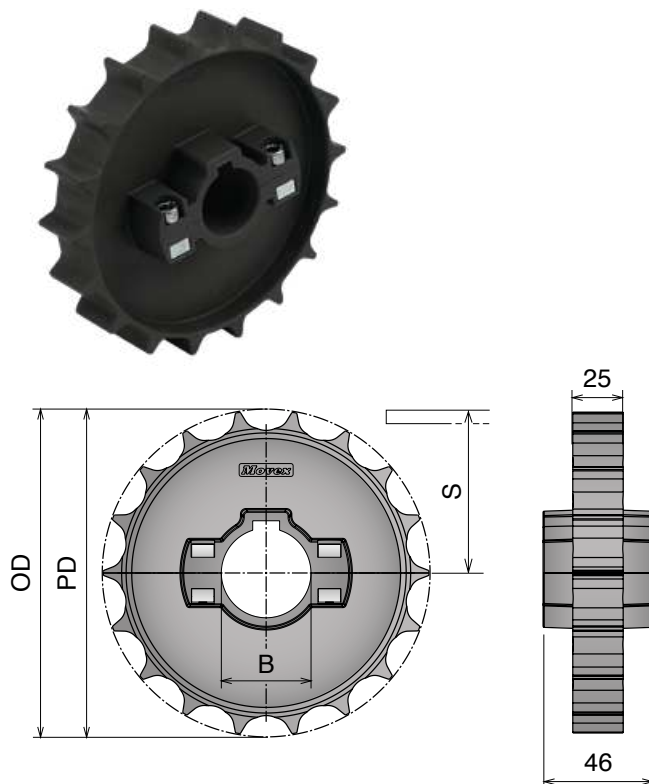Delivery: **Easy** **Standard**

Part	Article-Nr.	Z-	Bore	PD	OD	S
1535	153501	14	25	114,2	113,5	50,7
1535	153502		30			
1535	153503		35			
1535	153504		40			
1535	153506		25* 25	□		
1535	153507		30* 30	□		
1535	153508		40* 40	□		
1536	153601	16	25	130,2	129,0	58,7
1536	153602		30			
1536	153603		35			
1536	153604		40			
1536	153606		25* 25	□		
1536	153607		30* 30	□		
1536	153608		40* 40	□		
1537	153701	18	25	146,3	145,3	66,7
1537	153702		30			
1537	153703		35			
1537	153704		40			
1537	153706		25* 25	□		
1537	153707		30* 30	□		
1537	153708		40* 40	□		
1538	153801	20	25	162,4	161,7	74,8
1538	153802		30			
1538	153803		35			
1538	153804		40			
1538	153806		25* 25	□		
1538	153807		30* 30	□		
1538	153808		40* 40	□		

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

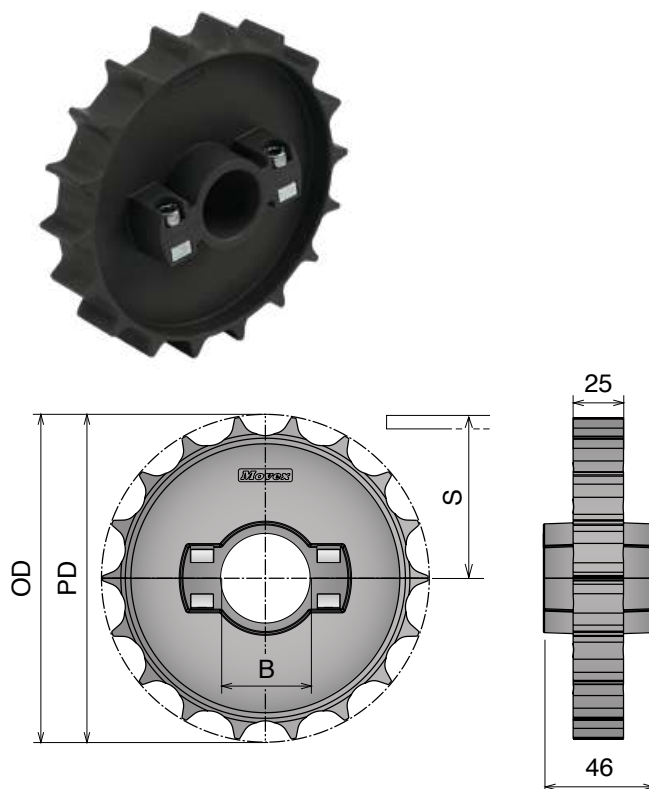


Part	Article-Nr.	Z-	Bore	PD	OD	S
1535	153551	14	25	114,2	113,5	50,7
1535	153552		30			
1535	153553		35			
1535	153554		40			
1536	153651	16	25	130,2	129,0	58,7
1536	153652		30			
1536	153653		35			
1536	153654		40			
1537	153751	18	25	146,3	145,3	66,7
1537	153752		30			
1537	153753		35			
1537	153754		40			
1538	153851	20	25	162,4	161,7	74,8
1538	153852		30			
1538	153853		35			
1538	153854		40			

552

Ruota traino divisa, fresata


Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

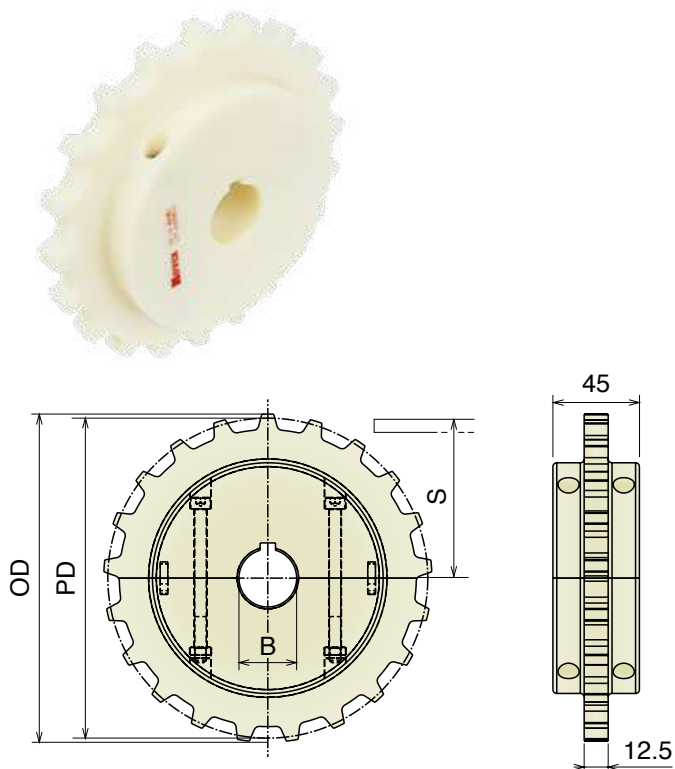

Part	Article-Nr.	Z-	Bore	PD	OD	S
1611	161101	16	25	130,2	130,6	58,7
1611	161102		30			
1611	161103		35			
1611	161104		40			
1611	161106		25* 25	∇		
1611	161107		30* 30	∇		
1611	161108		40* 40	∇		
1612	161201	18	25	146,3	146,9	66,8
1612	161202		30			
1612	161203		35			
1612	161204		40			
1612	161206		25* 25	∇		
1612	161207		30* 30	∇		
1612	161208		40* 40	∇		
1613	161301	21	25	170,4	170,7	78,8
1613	161302		30			
1613	161303		35			
1613	161304		40			
1613	161306		25* 25	∇		
1613	161307		30* 30	∇		
1613	161308		40* 40	∇		
1614	161401	25	25	202,7	204,2	95,0
1614	161402		30			
1614	161403		35			
1614	161404		40			
1614	161406		25* 25	∇		
1614	161407		30* 30	∇		
1614	161408		40* 40	∇		

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

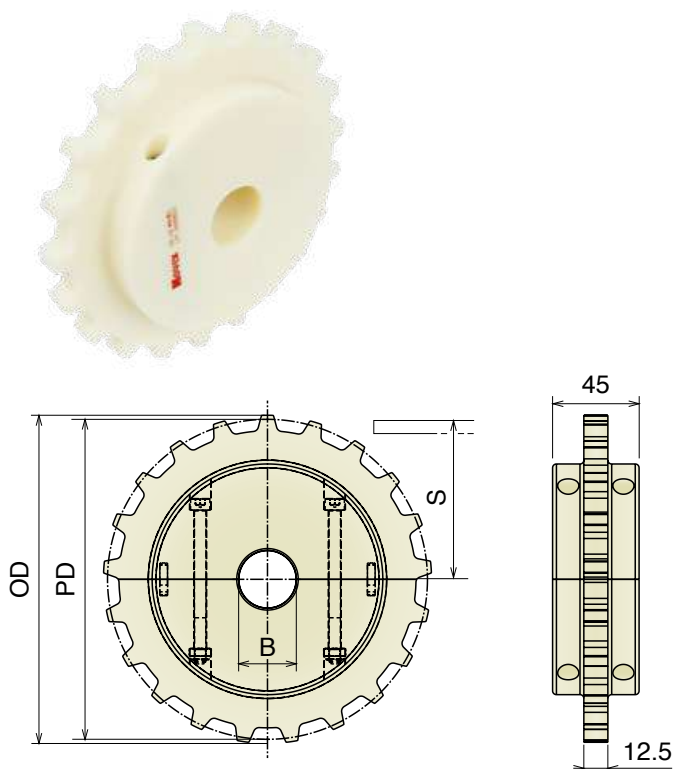

Part	Article-Nr.	Z-	Bore	PD	OD	S
1611	161150	16	18*	130,2	130,6	58,7
1611	161151		25			
1611	161152		30			
1611	161153		35			
1611	161154		40			
1612	161250	18	18*	146,3	146,9	66,8
1612	161251		25			
1612	161252		30			
1612	161253		35			
1612	161254		40			
1613	161350	21	18*	170,4	170,7	78,8
1613	161351		25			
1613	161352		30			
1613	161353		35			
1613	161354		40			
1614	161450	25	18*	202,7	204,2	95,0
1614	161451		25			
1614	161452		30			
1614	161453		35			
1614	161454		40			


Materiali / Material / Materialien: Machined Sp: Poliammide/Polyamide/Polyamid
 Molded Sp: Poliammide rinforzato/Polyamide reinforced/Verstärktes Polyamid
 Viti: Acciaio inox/Screws: Stainless steel/Schrauben: Edelstahl
 Dadi: Ottone nichelato/Nuts: Nickel plated brass/Mutter: Messing

NEW

553

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

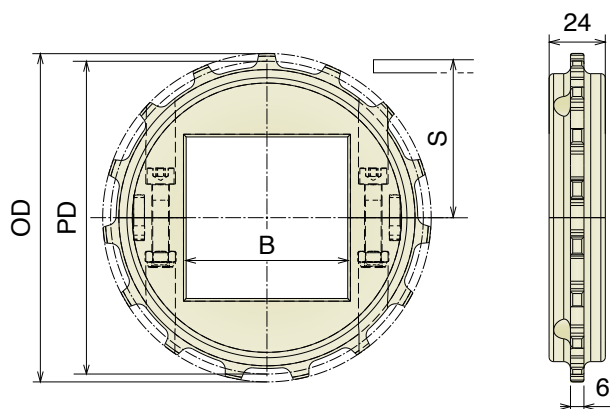


Part	Article-Nr.	Z-	Bore	PD	OD	S
1661	166108	12	40x40	98,1	97,6	44,5
1662	166208	15	40x40	122,2	121,9	56,5
1662	166210		60x60			
1663	166308	18	40x40	146,3	146,0	68,5
1663	166310		60x60			
1663	166311		65x65			

NEW

553

Ruota traino, stampata

drive sprocket, molded / Antriebskettenrad, gespritzt

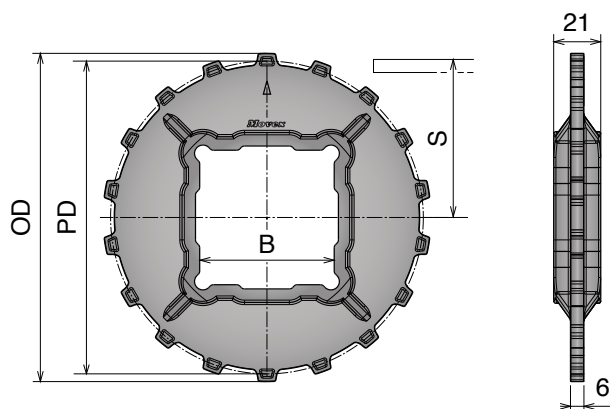


Part	Article-Nr.	Z-	Bore	PD	OD	S
1665	166511	18	40x40	146,3	146,0	68,5
1665	166510		60x60			

556

Ruota traino divisa, fresata


Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

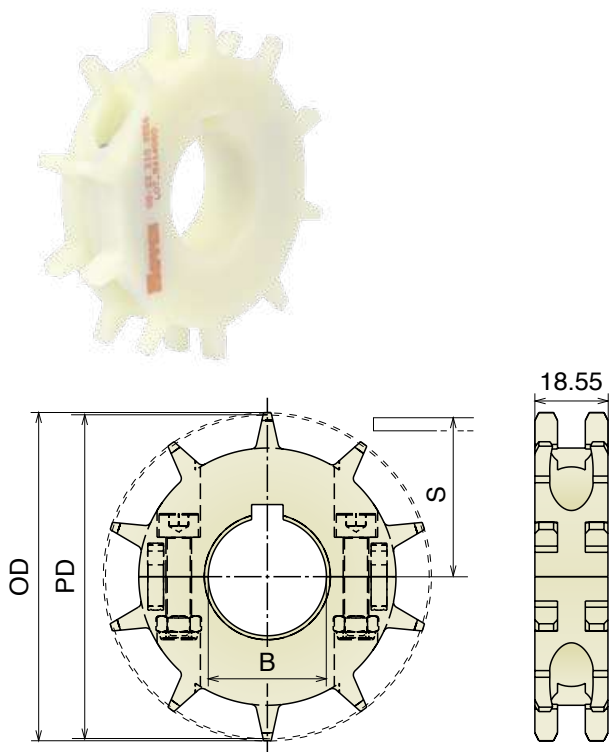

Part	Article-Nr.	Z-	Bore	PD	OD	S
1620	162001	10	25	82,2	83,3	33,0
1620	162002		30			
1620	162003E		35			
1620	162004E		40			
1620	162006		25* 25	∇		
1620	162007		30* 30	∇		
1620	162008E		40* 40	∇		
1621	162101	12	25	98,1	100,0	41,0
1621	162102		30			
1621	162103		35			
1621	162104		40			
1621	162106		25* 25	∇		
1621	162107		30* 30	∇		
1621	162108E		40* 40	∇		
1622	162201	15	25	122,2	124,3	53,0
1622	162202		30			
1622	162203		35			
1622	162204		40			
1622	162206		25* 25	∇		
1622	162207		30* 30	∇		
1622	162208		40* 40	∇		
1623	162301	18	25	146,3	147,8	65,0
1623	162302		30			
1623	162303		35			
1623	162304		40			
1623	162306		25* 25	∇		
1623	162307		30* 30	∇		
1623	162308		40* 40	∇		

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

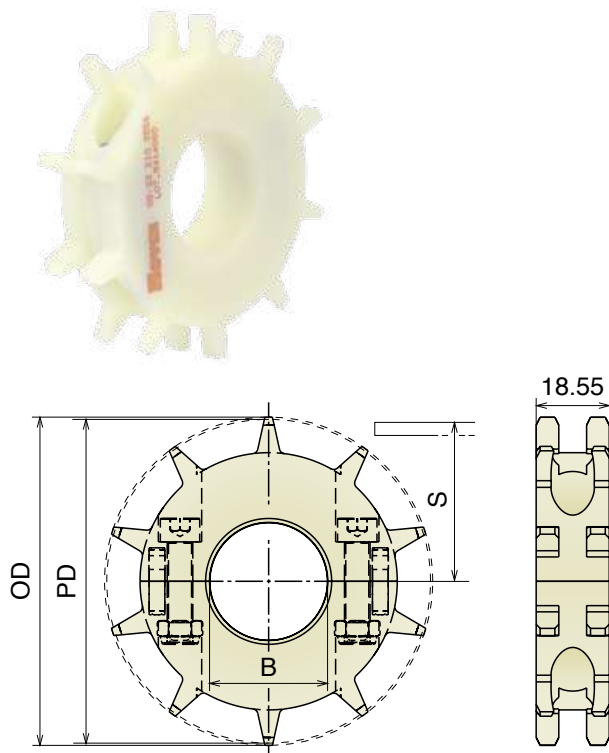


Part	Article-Nr.	Z-	Bore	PD	OD	S
1620	162050	10	18*	82,2	83,3	33,0
1620	162051		25			
1620	162052		30			
1620	162053E		35			
1620	162054E		40			
1621	162150	12	18*	98,1	100,0	41,0
1621	162151		25			
1621	162152		30			
1621	162153		35			
1621	162154		40			
1622	162250	15	18*	122,2	124,3	53,0
1622	162251		25			
1622	162252		30			
1622	162253		35			
1622	162254		40			
1623	162350	18	18*	146,3	147,8	65,0
1623	162351		25			
1623	162352		30			
1623	162353		35			
1623	162354		40			

260-261

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst


Delivery: **Easy** **Standard**

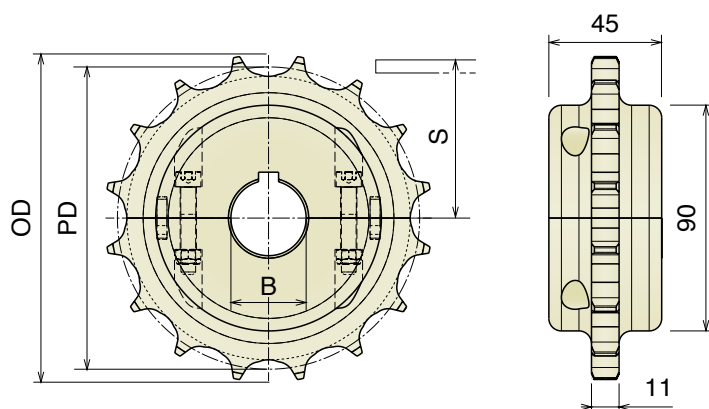

Part	Article-Nr.	Z-	Bore	PD	OD	S
1541	154101	16	25	128,9	130,9	67,8
1541	154102		30			
1541	154103		35			
1541	154104		40			
1542	154201	18	25	144,8	146,8	75,7
1542	154202		30			
1542	154203		35			
1542	154204		40			
1543	154301	19	25	154,3	156,3	80,5
1543	154302		30			
1543	154303		35			
1543	154304		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

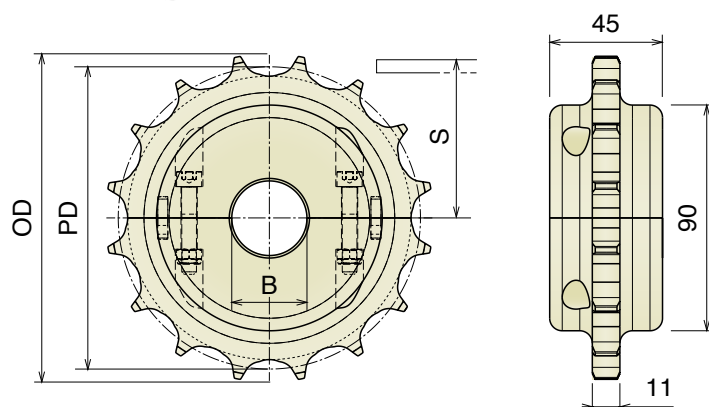

Part	Article-Nr.	Z-	Bore	PD	OD	S
1541	154150	16	18*	128,9	130,9	67,8
1541	154151		25			
1541	154152		30			
1541	154153		35			
1541	154154		40			
1542	154250	18	18*	144,8	146,8	75,7
1542	154251		25			
1542	154252		30			
1542	154253		35			
1542	154254		40			
1543	154350	19	18*	154,3	156,3	80,5
1543	154351		25			
1543	154352		30			
1543	154353		35			
1543	154354		40			


*Plain Bore

260-261

Ruota traino divisa, stampata

Split drive sprocket, molded / geteiltes Antriebskettenrad, gespritzt


Delivery: **Easy** **Standard**

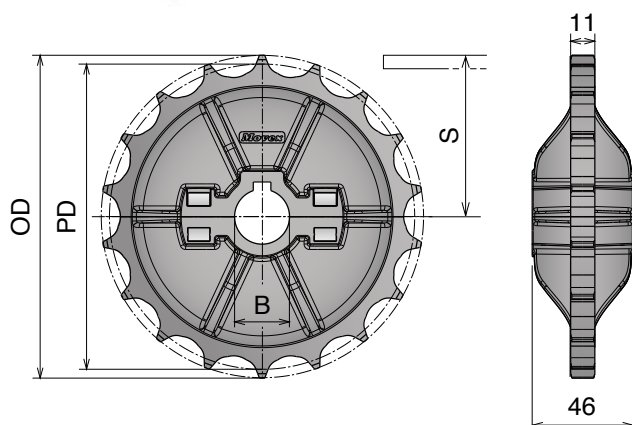

Part	Article-Nr.	Z-	Bore	PD	OD	S
1545	154501	16	25	128,9	130,9	67,8
1545	154502		30			
1545	154503		35			
1545	154504		40			
1545	154506		25* 25	∇		
1545	154507		30* 30	∇		
1545	154508		40* 40	∇		
1546	154601	18	25	144,8	146,8	75,7
1546	154602		30			
1546	154603		35			
1546	154604		40			
1546	154606		25* 25	∇		
1546	154607		30* 30	∇		
1546	154608		40* 40	∇		
1547	154701	19	25	154,3	156,3	80,5
1547	154702		30			
1547	154703		35			
1547	154704		40			
1547	154706		25* 25	∇		
1547	154707		30* 30	∇		
1547	154708		40* 40	∇		

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

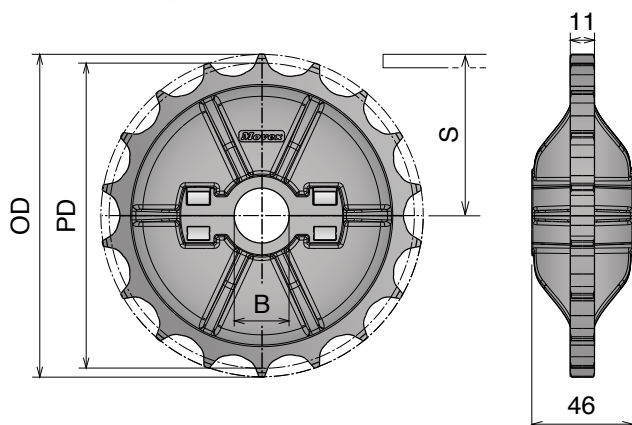


Part	Article-Nr.	Z-	Bore	PD	OD	S
1545	154551	16	25	128,9	130,9	67,8
1545	154552		30			
1545	154553		35			
1545	154554		40			
1546	154651	18	25	144,8	146,8	75,7
1546	154652		30			
1546	154653		35			
1546	154654		40			
1547	154751	19	25	154,3	156,3	80,5
1547	154752		30			
1547	154753		35			
1547	154754		40			

600

Ruota traino divisa, fresata


Split drive sprocket, machined / geteiltes Antriebskettenrad, gefräst

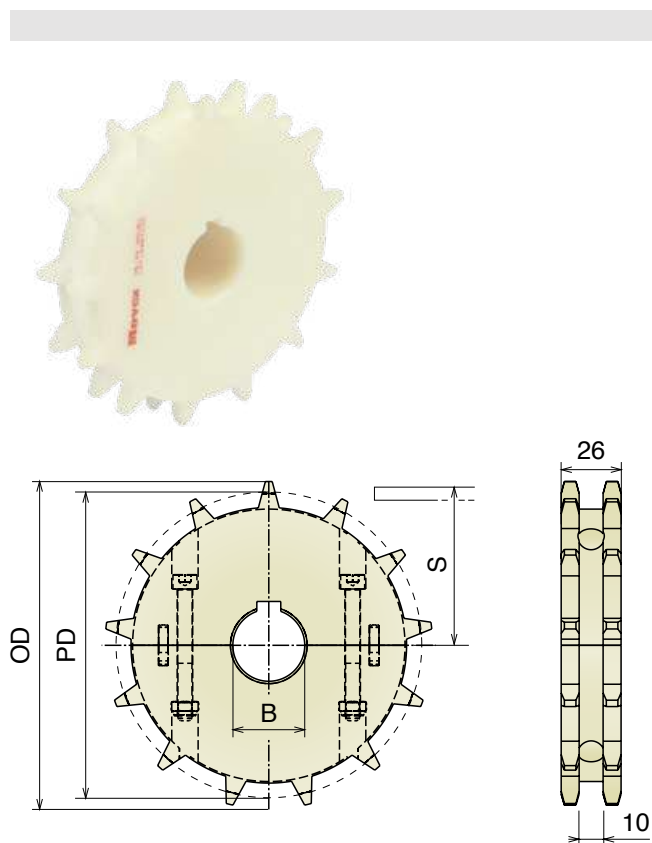

Part	Article-Nr.	Z-	Bore	PD	OD	S
1571	157101	10	25	102,8	107,7	45,0
1571	157102		30			
1571	157103		35			
1571	157104		40			
1572	157201	13	25	132,7	138,8	60,0
1572	157202		30			
1572	157203		35			
1572	157204		40			
1573	157301	15	25	152,7	159,4	70,0
1573	157302		30			
1573	157303		35			
1573	157304		40			
1574	157401	16	25	162,8	169,6	75,0
1574	157402		30			
1574	157403		35			
1574	157404		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

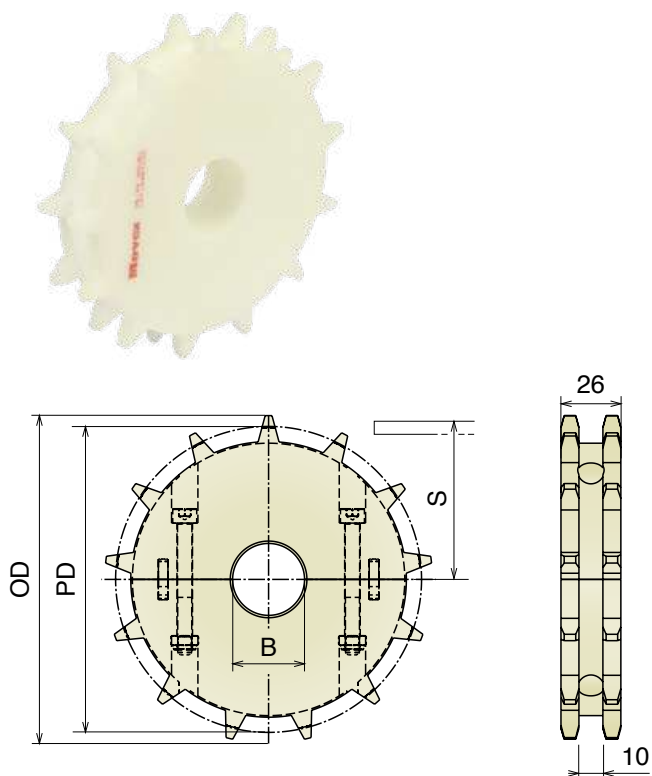

Part	Article-Nr.	Z-	Bore	PD	OD	S
1571	157150	10	18*	102,8	107,7	45,0
1571	157151		25			
1571	157152		30			
1571	157153		35			
1571	157154		40			
1572	157250	13	18*	132,7	138,8	60,0
1572	157251		25			
1572	157252		30			
1572	157253		35			
1572	157254		40			
1573	157350	15	18*	152,7	159,4	70,0
1573	157351		25			
1573	157352		30			
1573	157353		35			
1573	157354		40			
1574	157450	16	18*	162,8	169,6	75,0
1574	157451		25			
1574	157452		30			
1574	157453		35			
1574	157454		40			



*Plain Bore

600 Support sprocket

Ruota traino divisa, fresata

Split drive sprocket, machined / geteiltes Antriebskettenrad gefräst


Designed to support Small radius section

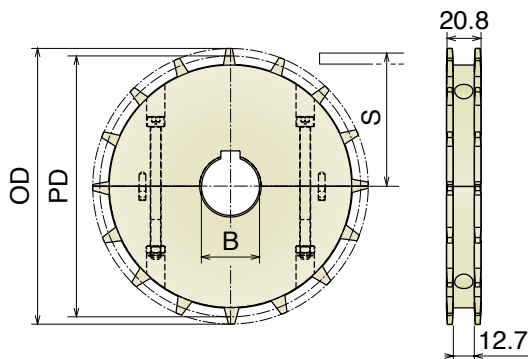

Article-Nr.	Z-	Bore	PD	OD	S
157101SR	10	25	102,8	107,7	45,0
157102SR		30			
157103SR		35			
157104SR		40			
157201SR	13	25	132,7	138,8	60,0
157202SR		30			
157203SR		35			
157204SR		40			
157301SR	15	25	152,7	159,4	70,0
157302SR		30			
157303SR		35			
157304SR		40			
157401SR	16	25	162,8	169,6	75,0
157402SR		30			
157403SR		35			
157404SR		40			

Ruota rinvio divisa, fresata

Split idler sprocket, machined / geteiltes Umlenkrad, gefräst

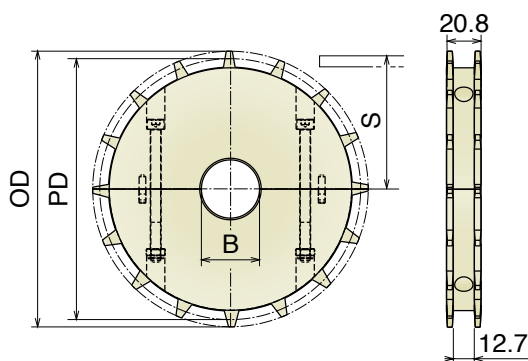

Article-Nr.	Z-	Bore	PD	OD	S
157150SR	10	18*	102,8	107,7	45,0
157151SR		25			
157152SR		30			
157153SR		35			
157154SR		40			
157250SR	13	18*	132,7	138,8	60,0
157251SR		25			
157252SR		30			
157253SR		35			
157254SR		40			
157350SR	15	18*	152,7	159,4	70,0
157351SR		25			
157352SR		30			
157353SR		35			
157354SR		40			
157450SR	16	18*	162,8	169,6	75,0
157451SR		25			
157452SR		30			
157453SR		35			
157454SR		40			


*Plain Bore

600 Split support roller

Ruota rinvio liscia, divisa, fresata

Split idler wheel, machined / geteilte Umlenkrolle, gefräst

Designed to support Small radius section

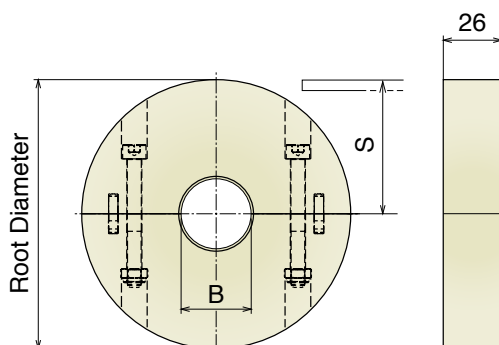

Article-Nr.	Z- eq.	Bore	Root Ø	S
157150R	10	18*	85,1	45,0
157151R		25		
157152R		30		
157153R		35		
157154R		40		
157250R	13	18*	115,0	60,0
157251R		25		
157252R		30		
157253R		35		
157254R		40		
157350R	15	18*	134,3	70,0
157351R		25		
157352R		30		
157353R		35		
157354R		40		
157450R	16	18*	146,8	75,0
157451R		25		
157452R		30		
157453R		35		
157454R		40		

Fix split support roller
with split collars


Part 215 Pag 445





ZERO CONTACT

Ruota traino, fresata

Drive sprocket, machined / Antriebskettenrad, gefräst

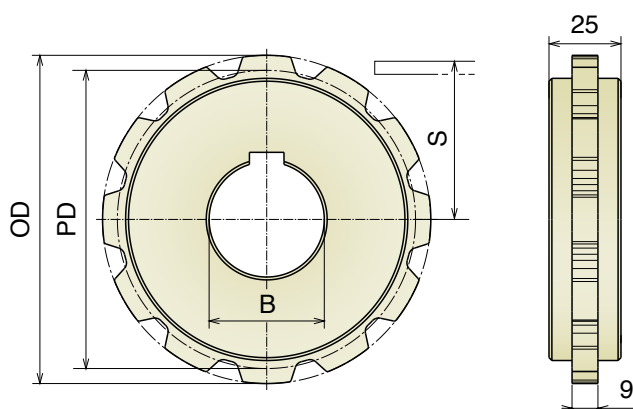

Part	Article-Nr.	Z-	Bore	R _t +50	PD	OD	S
1624	162401	12	40	650	58,0	61,0	25,6
1624	162402			750	66,0	69,0	29,9
1624	162403			850	76,0	79,0	34,2
1624	162404			950	84,0	86,0	38,5
1624	162405			1050	94,0	97,0	42,8
1624	162406			1150	102,0	104,0	47,1
1624	162407			1250	112,0	114,0	51,4
1624	162408			1350	119,0	122,0	55,7
1624	162409			1450	130,0	132,0	60,0
1624	162410			1550	137,0	140,0	64,3
1624	162411			1650	145,0	148,0	68,6
1624	162412			1750	154,0	157,0	72,9
1624	162413			1850	163,0	166,0	77,2
1624	162414			1950	171,0	174,0	81,5
1624	162415			2050	180,0	183,0	85,8
1624	162416			2150	189,0	192,0	90,1




Smallest sprocket with integrated key valid only for code 162401

NOTE: in order to install the smallest sprockets a shaft key way continued to the end of the shaft is required.

ZERO CONTACT PRO

Ruota traino, fresata

Drive sprocket, machined / Antriebskettenrad, gefräst

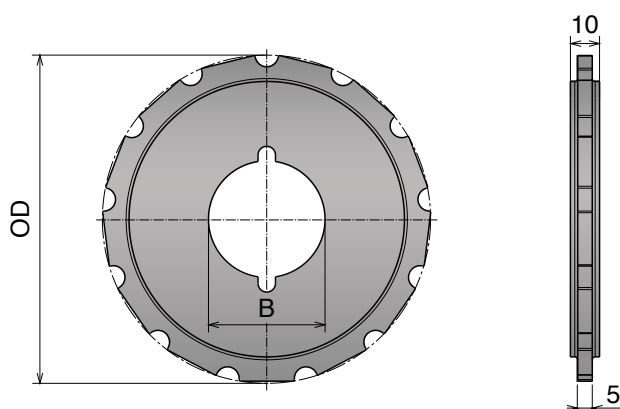


Part	Article-Nr.	Z-	Bore	OD
1633	163301	13	30	45,9
1633	163302			52,0
1633	163303		40	58,0
1633	163304			64,1
1633	163305			70,2
1633	163306			76,2
1633	163307			82,3
1633	163308			88,3
1633	163309			94,4
1633	163310			100,5
1633	163311			106,6
1633	163312			112,6
1633	163313			118,7
1633	163314			124,7
1633	163315			130,8
1633	163316			136,9
1633	163317			142,9

500 RR

Ruota traino, stampata

Drive sprocket, molded / Antriebskettenrad, gespritzt


Delivery: **Easy** **Standard**

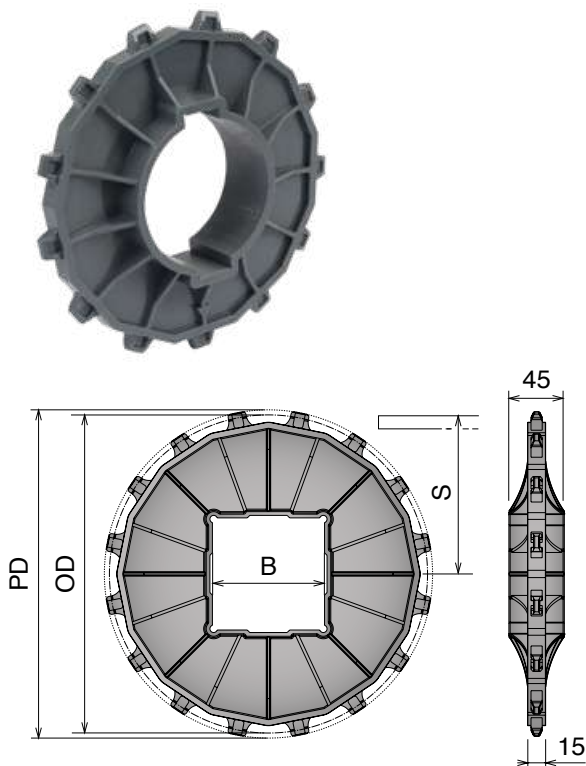

Part	Article-Nr.	Z-	Bore	PD	OD	S
1551	155104	10	Ø40	164,4	163,1	74,2
1551	155105		Ø50			
1551	155106		40x40			
1551	155107		60x60			
1551	155108		65x65			
1552	155204	12	Ø40	196,3	196,3	90,1
1552	155206		40x40			
1552	155207		60x60			
1552	155208		65x65			
1553	155311	13	Ø65	212,3	213,6	98,1
1553	155310		Ø90			
1553	155306		40x40			
1553	155307		60x60			
1553	155308		65x65			
1553	155309		90x90			
1559	155910	16	Ø90	260,4	262,0	122,3
1559	155908		65x65			
1559	155909		90x90			
1559	155912		120x120			

Ruota traino, fresata

Drive sprocket, machined / Antriebskettenrad, gefräst

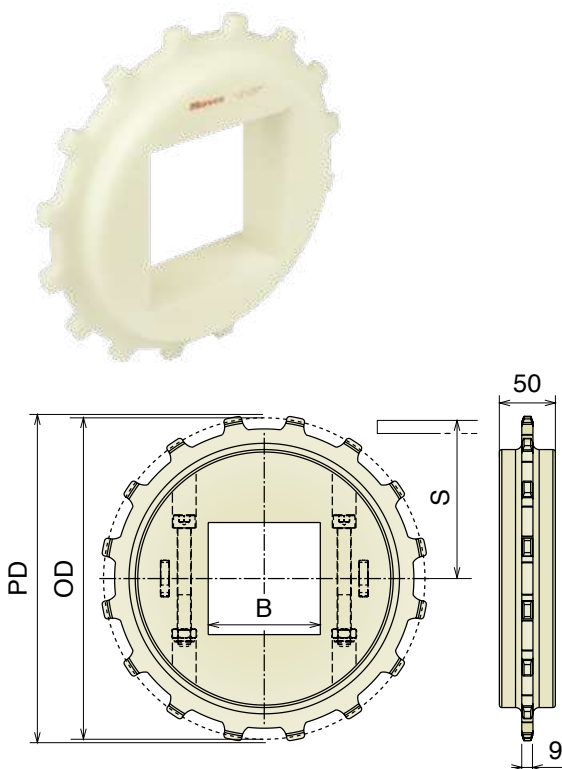

Part	Article-Nr.	Z-	Bore	PD	OD	S
1607	160704	10	Ø40	164,4	163,1	74,2
1607	160705		Ø50			
1607	160706		40x40			
1607	160707		60x60			
1607	160708		65x65			
1608	160804	12	Ø40	196,3	196,3	90,1
1608	160806		40x40			
1608	160807		60x60			
1608	160808		65x65			
1609	160911	13	Ø65	212,3	209,0	98,1
1609	160910		Ø90			
1609	160906		40x40			
1609	160907		60x60			
1609	160908		65x65			
1609	160909		90x90			
1610	161010	16	Ø90	260,4	262,0	122,3
1610	161005		Ø2,5"			
1610	161008		65x65			
1610	161009		90x90			
1610	161012E		120x120			

500 RR *Split Version*

Ruote per tappeti / Belt sprockets / Kettenräder für Mattenketten

Materiale / Material / Materialien:

Resina acetalica/Acetal resin/Azetal

Viti: Acciaio inox/Screws: Stainless steel/Schrauben: Edelstahl

Dadi: Acciaio inox/Nuts: Stainless steel/Mutter: Edelstahl

500 RR *Split Version*


Ruota traino, stampata/Drive sprocket, molded / Antriebskettenrad, gespritzt

Delivery:	Easy	Standard	Part	Article-Nr.	Z-	Bore	PD	OD	S
			1558	155810	16	Ø 90 with double keyway	260,4	262,0	122,3



Advantages:

- Easy clean
- Easy installation
- Heavy duty design

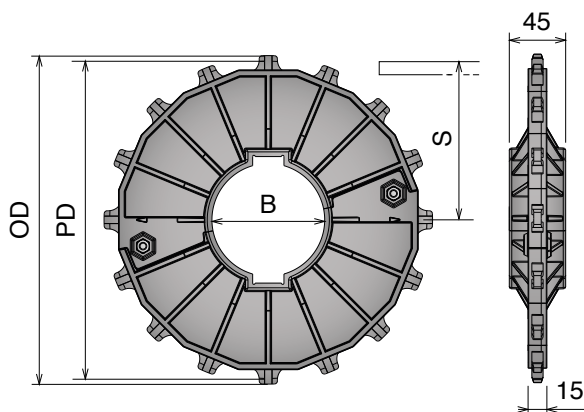

Ruota rinvio divisa, stampata

Split idler sprocket, molded / geteiltes Umlenkrad, gespritzt

Part	Article-Nr.	Z-	Bore (B)	Bore (B ₁ x B ₁)	PD	OD	S
1558	155809	16	Ø 100	90 x 90	260,4	262,0	122,3

